

TECHNICAL DATA SHEET


STRIPP IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

83x249 mm

Material : CALCYT® plaster

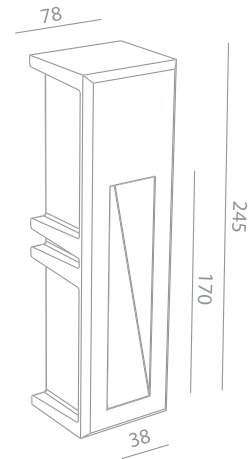

REMOTE LED DRIVER ON/OFF

REF N° 697 00 006 8W

REF N° 697 00 015 15W

REF N° 697 00 025 25W

230V/50Hz - - current controlled

- - IP20 - 350mA - not dimmable

STRIPP LED DIM 100 LM

REF N° 144 60 500 CRI 80 warm white 2200°K

REF N° 144 60 000 CRI 90 warm white 2700°K

REF N° 144 60 100 CRI 90 warm white 3000°K

REF N° 144 60 200 CRI 90 neutral white 4000°K

REF N° 144 60 300 royal blue

- 1W - excl. LED driver - current controlled 350 mA - - -
 - - serial wiring - 3 Step MacAdam
 Requires remote LED driver - 350 mA

REMOTE LED DRIVER DIM

REF N° 697 60 006 6W 1-10V

REF N° 697 60 015 15W 1-10V

REF N° 697 30 015 15W DALI

REF N° 697 60 025 25W 1-10V DALI PUSH

REF N° 697 60 040 40W 1-10V DALI PUSH

REF N° 697 70 009 9W PHASE DIM (tr. edge)

REF N° 697 70 017 17W PHASE DIM

230V/50Hz - - current controlled

- - IP20 - 350mA - dimmable

STRIPP LED DIM 200 LM

REF N° 144 62 500 CRI 80 warm white 2200°K

REF N° 144 62 000 CRI 90 warm white 2700°K

REF N° 144 62 100 CRI 90 warm white 3000°K

REF N° 144 62 200 CRI 90 neutral white 4000°K

REF N° 144 62 300 royal blue

- 2W - excl. LED driver - current controlled 350 mA - - -
 - - serial wiring - 3 Step MacAdam
 Requires remote LED driver - 350 mA

STRIPP LED DIM 400 LM

REF N° 144 61 500 CRI 80 warm white 2200°K


REF N° 144 61 000 CRI 90 warm white 2700°K

REF N° 144 61 100 CRI 90 warm white 3000°K

REF N° 144 61 200 CRI 90 neutral white 4000°K

REF N° 144 61 300 royal blue

- 4W - excl. LED driver - current controlled 350 mA - - -
 - - serial wiring - 3 Step MacAdam
 Requires remote LED driver - 350 mA



Ready for installation in solid walls
 Optional plasterkit for installation into gypsum walls

PLASTERKIT STRIPP

REF N° 744 01 000 For mounting into gypsum walls

Housing: perforated aluminium



