

TECHNICAL DATA SHEET

STRIPP XL IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

83x550 mm




Material : CALCYT® plaster

REMOTE LED DRIVER ON/OFF

REF N° 697 00 006 8W

REF N° 697 00 015 15W

REF N° 697 00 025 25W

230V/50Hz -  - current controlled
 -  - IP20 - 350mA - not dimmable

STRIPP XL LED DIM 100 LM







REF N° 143 60 500 CRI 80 warm white 2200°K

REF N° 143 60 000 CRI 90 warm white 2700°K

REF N° 143 60 100 CRI 90 warm white 3000°K

REF N° 143 60 200 CRI 90 neutral white 4000°K

REF N° 143 60 300 royal blue

 - 1W - excl. LED driver - current controlled 350 mA -  -  -  -  -  - serial wiring - 3 Step MacAdam
 Requires remote LED driver - 350 mA

REMOTE LED DRIVER DIM

REF N° 697 60 006 6W 1-10V

REF N° 697 60 015 15W 1-10V




REF N° 697 30 015 15W DALI

REF N° 697 60 025 25W 1-10V DALI PUSH

REF N° 697 60 040 40W 1-10V DALI PUSH

REF N° 697 70 009 9W PHASE DIM (tr. edge)

REF N° 697 70 017 17W PHASE DIM

230V/50Hz -  - current controlled
 -  - IP20 - 350mA - dimmable

STRIPP XL LED DIM 200 LM







REF N° 143 62 500 CRI 80 warm white 2200°K

REF N° 143 62 000 CRI 90 warm white 2700°K

REF N° 143 62 100 CRI 90 warm white 3000°K

REF N° 143 62 200 CRI 90 neutral white 4000°K

REF N° 143 62 300 royal blue

 - 2W - excl. LED driver - current controlled 350 mA -  -  -  -  -  - serial wiring - 3 Step MacAdam
 Requires remote LED driver - 350 mA

STRIPP XL LED DIM 400 LM







REF N° 143 61 500 CRI 80 warm white 2200°K


REF N° 143 61 000 CRI 90 warm white 2700°K

REF N° 143 61 100 CRI 90 warm white 3000°K

REF N° 143 61 200 CRI 90 neutral white 4000°K

REF N° 143 61 300 royal blue

 - 4W - excl. LED driver - current controlled 350 mA -  -  -  -  -  - serial wiring - 3 Step MacAdam
 Requires remote LED driver - 350 mA

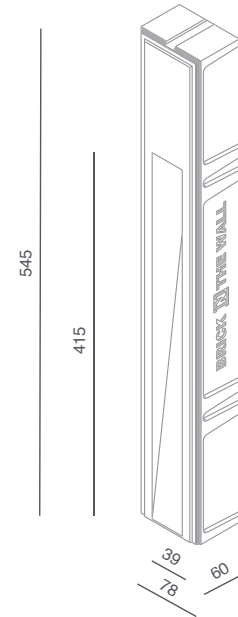

Ready for installation in solid walls
 Optional plasterkit for installation into gypsum walls

PLASTERKIT STRIPP XL
REF N° 743 01 000 For mounting into gypsum walls
 Housing: perforated aluminium



BRICK IN THE WALL