

astro

PHOTOMETRIC  
TEST REPORT

---

<b>Report Number</b>	GNC-21590
<b>Customer</b>	Astro Lighting Limited
<b>Contact</b>	Ross Dickson
<b>Product Type</b>	LED Wall light
<b>Test Purpose</b>	Generation of photometric data
<b>Quote Reference</b>	Q-LUX17-21659
<b>Works Order Number</b>	WO-12237
<b>Test Item Reference</b>	TI-15352
<b>LAB Test Method Reference</b>	TES-102000
<b>Test Standards</b>	LM-79-08; (BS) EN 13032-4:2015; CIE S025:2015
<b>Lab Location Reference</b>	LUX-TSI
<b>Tested by</b>	Mike Sewell
<b>Date of Test</b>	15/08/2018
<b>Reviewed by</b>	Gareth Jones
<b>Number of products tested</b>	1

Address: LUX-TSI Ltd.,  
Pencoed Technology Park,  
Pencoed, Bridgend,  
CF35 5AQ, UK  
Telephone: +44 (0) 1656 864618  
Authorised by: M. Schakel  
Email: [CustomerService@lux-tsi.com](mailto:CustomerService@lux-tsi.com)  
Signed: 



Versailles 370 Bronze - 8544

Date: 15/08/2018

## Disclaimers

This report is for the exclusive use of LUX-TSI's Customer and is provided pursuant to the agreement between LUX-TSI and its Customer. LUX-TSI's responsibility and reliability are limited to the Terms and Conditions of the agreement. LUX-TSI assumes no liability to any other party, other than the Customer in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Customer is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the LUX-TSI name or one of its marks for the sale or advertisement of the tested material, product or service must be approved in writing by LUX-TSI.

The observations and test results in this report are relevant only to the sample tested. Opinions expressed and data supplied in this report, are given in good faith, and are based on the information provided by the Customer. This report does not remove the requirement for the Customer to obtain further independent advice and in particular to instruct a notified or competent body or person to carry out further evaluation work and/or testing. Accordingly, no warranty is given, nor is any term or condition to be implied, that the product, which is the subject of this report, complies with the requirements of any EU directives.

### Nomenclature

Lamp Orientation described below relates to the position in which a lamp is designed to operate for maximum performance and safety, these include:

BD - Base Down (bulb is vertically positioned with the metal base at the bottom, glass up)

BU - Base Up (bulb is vertically positioned with the metal base at the top, glass hanging down)

HBD - Horizontal  $+15^{\circ}$  to Base Down

H45 - Horizontal to  $-45^{\circ}$  only

VBU - Vertical Base Up  $\pm 15^{\circ}$

VBD - Vertical Base Down  $\pm 15^{\circ}$

HBU - Base Up  $\pm 90^{\circ}$  (bulb can be operated in a base up or horizontal position)

HOR - Horizontal Burn (bulb is positioned with the metal base parallel to the ground)

H75 - Horizontal  $\pm 75^{\circ}$  (bulb should not be operated within  $15^{\circ}$  of vertical)

U - Universal Burn (burn can be operated in any position)

---

### Test Conditions

Measurements were made with an ambient temperature of  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ . Measurements were taken only after sufficient time for thermal stabilisation has been allowed. Thermal stabilisation according to LM-79-08 was achieved before measurements are measured and reported.

---

### Calibrations

The far field Type C Goniophotometer and Integrating Sphere spectroradiometer is calibrated using an intensity lamp calibrated by a NVLAP accredited calibration laboratory.

---

### Test Equipment

UL LSI Custom Far-Field Type C Moving Mirror Goniophotometer measures intensity as a function of angle. Spectral measurements are measured using a Labsphere 1 metre integrating sphere.

---

### Data Formats

IES (15 deg azimuth and 2.5 deg inclination) and LDT (15 deg C planes and 2.5 deg gamma angles)

Spectral Data file from which the calculation of chromaticity and CRI etc. have been performed and the derived results from the LightMtrX software are provided as a text file format.

All photometric data for LED products will be provided in ABSOLUTE photometric format and all non-LED data will be in relative photometric format with lamp lumens measured separately, where possible, for LOR estimation.

<b>Product Name</b>	Versailles 370
<b>Part/Serial Number</b>	1380014
<b>Type of Product</b>	LED Wall light
<b>Base Type</b>	Not Applicable - Luminaire
<b>Driver Type</b>	Internal
<b>Test Time</b>	30 mins
<b>Operating Orientation</b>	Base Up
<b>Test Orientation</b>	Base Up
<b>Ambient Temperature</b>	25.4°C
<b>Manufacturer</b>	Astro Lighting Limited
<b>Date of Manufacture</b>	Not Available
<b>Thermal Management</b>	Passive
<b>Dimmable</b>	No
<b>Pre-Burning Time</b>	0 hours
<b>Stabilisation Time</b>	60 mins
<b>Humidity</b>	43.7% RH
<b>Averaging Applied</b>	NONE

Driver Details		
Manufacturer		N/A
Model		N/A
Part/Serial #		N/A
Rated Voltage		N/A
Output	Current	N/A
	Voltage	N/A

Photometric Measurements	
Luminous Flux	609 lm
Luminous Efficacy	40 lm/W


Dimension	Sample	Luminous Opening
Diameter/Width	80 mm	75 mm
Length	80 mm	70 mm
Height/Depth	370 mm	335 mm

Electrical Measurements	
Frequency	50 Hz
Voltage	230.1 V
Current	0.166 A
Power	15.1 W
Power Factor	0.397
Apparent Power	38.1 VA

### Goniophotometric Measurements

Beam Angle	Horizontal	180°
	Vertical	50°
On-axis Intensity		1 cd
Peak Intensity		127 cd
Peak Direction	Horizontal	15°
	Vertical	90°


Polar Plot (cd)

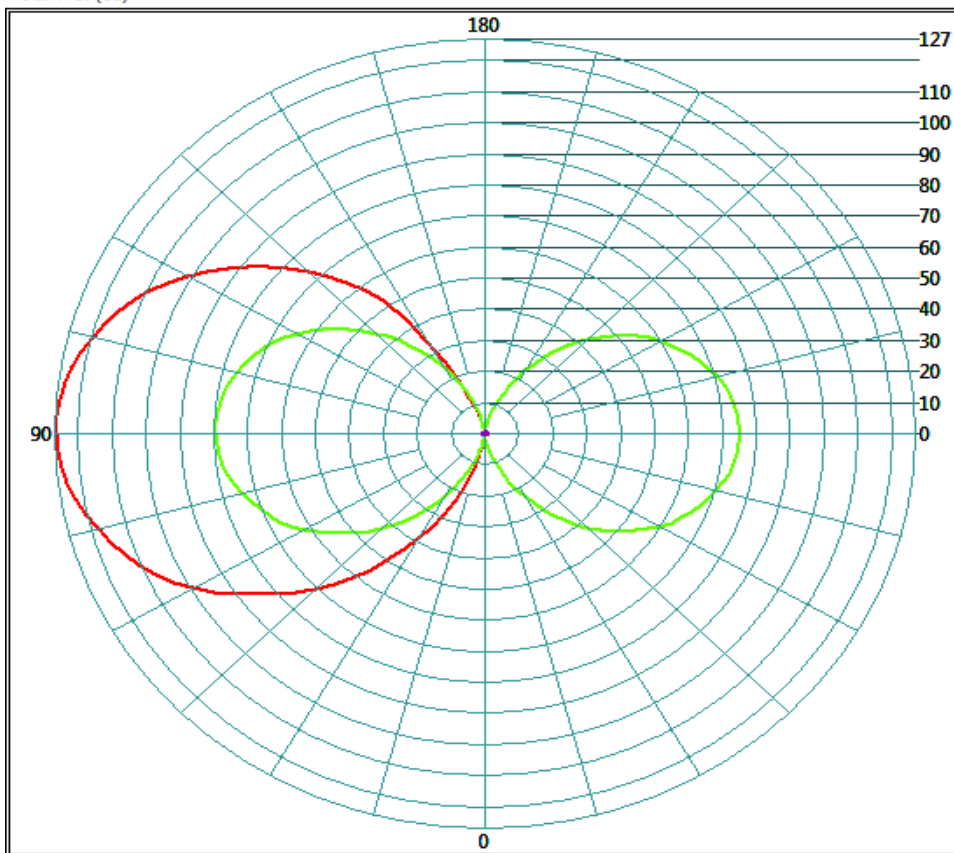

## Spectral Results

### *Integrated Spectral Measurement using spectroradiometer and 1 metre integrating sphere*

The following data was determined from an integrated spectral measurement using a spectrometer. This will produce spatially averaged spectroradiometric results measured in an integrating sphere.

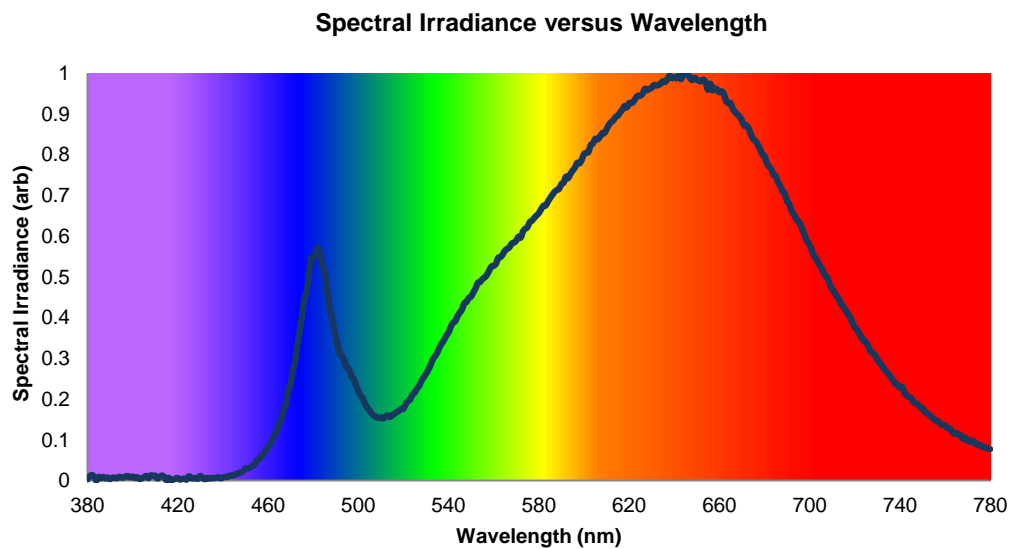


Colour Rendering Index Detail			
R1	84	R8	71
R2	91	R9	35
R3	95	R10	77
R4	83	R11	81
R5	83	R12	68
R6	87	R13	85
R7	88	R14	97

Colorimetric Details	
CCT	2888K
CRI (Ra)	85

Chromaticity Coordinates		
CIE 1931	x	0.4429
	y	0.4026
CIE 1960	u	0.2551
	v	0.3478
CIE 1976	u'	0.2551
	v'	0.5217
Duv		0.0018


CIE 1931 Colour Chart

• 0.443, 0.403

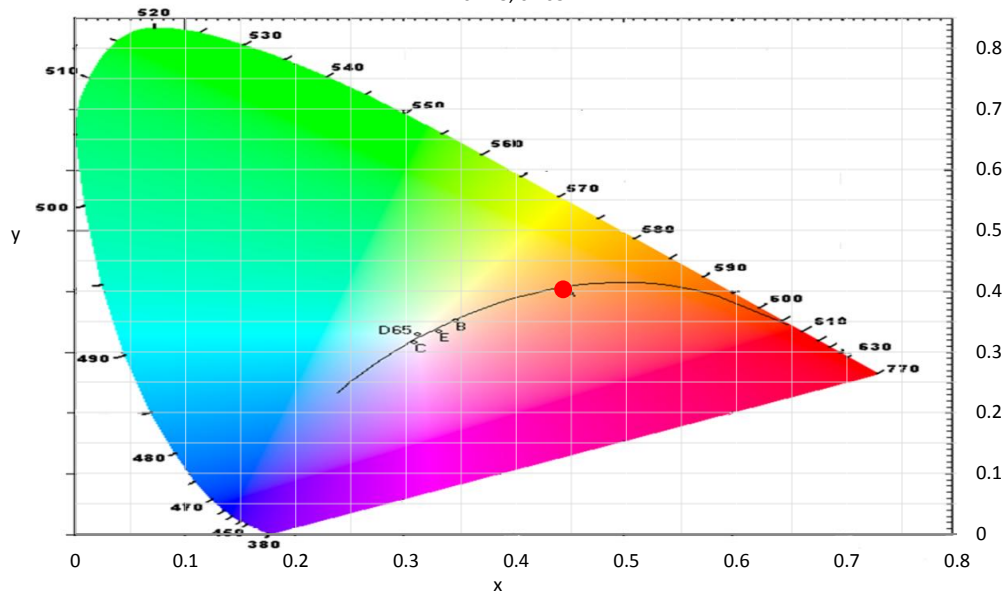

CIE 1931 x, y Chromaticity Diagram - Nominal CCT Quadrangles

• 0.443, 0.403

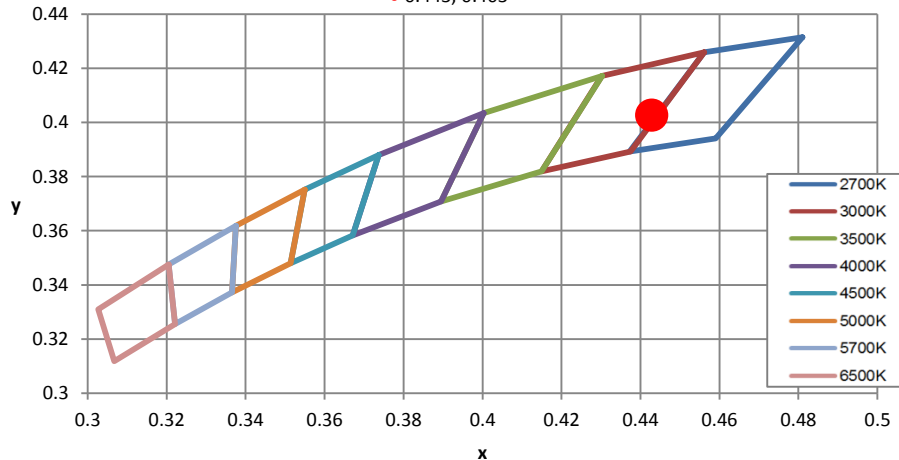

### Spectral Power Distribution

$\lambda$ (nm)	Arb units	$\lambda$ (nm)	Arb units	$\lambda$ (nm)	Arb units	$\lambda$ (nm)	Arb units
380	2.77E-03	430	1.13E-02	480	5.50E-01	530	2.62E-01
381	1.04E-02	431	6.44E-03	481	5.56E-01	531	2.72E-01
382	1.36E-02	432	3.26E-03	482	5.72E-01	532	2.83E-01
383	9.00E-03	433	6.47E-03	483	5.58E-01	533	2.97E-01
384	0.00E+00	434	4.74E-03	484	5.28E-01	534	3.05E-01
385	8.93E-03	435	6.13E-03	485	5.13E-01	535	3.14E-01
386	5.51E-03	436	5.74E-03	486	4.78E-01	536	3.27E-01
387	9.04E-03	437	6.76E-03	487	4.33E-01	537	3.37E-01
388	4.96E-03	438	8.11E-03	488	4.10E-01	538	3.45E-01
389	7.48E-03	439	5.51E-03	489	3.79E-01	539	3.56E-01
390	3.51E-03	440	7.29E-03	490	3.55E-01	540	3.64E-01
391	7.03E-03	441	9.16E-03	491	3.29E-01	541	3.77E-01
392	6.77E-03	442	8.77E-03	492	3.10E-01	542	3.88E-01
393	5.59E-03	443	1.22E-02	493	3.05E-01	543	3.91E-01
394	9.17E-03	444	1.16E-02	494	2.90E-01	544	4.04E-01
395	7.75E-03	445	1.45E-02	495	2.76E-01	545	4.13E-01
396	7.06E-03	446	1.53E-02	496	2.73E-01	546	4.20E-01
397	1.04E-02	447	1.87E-02	497	2.55E-01	547	4.36E-01
398	1.06E-02	448	1.98E-02	498	2.50E-01	548	4.39E-01
399	7.81E-03	449	2.30E-02	499	2.34E-01	549	4.49E-01
400	9.93E-03	450	2.97E-02	500	2.20E-01	550	4.52E-01
401	6.15E-03	451	3.01E-02	501	2.09E-01	551	4.62E-01
402	8.41E-03	452	3.10E-02	502	2.03E-01	552	4.72E-01
403	3.79E-03	453	3.66E-02	503	1.87E-01	553	4.86E-01
404	5.37E-03	454	3.85E-02	504	1.79E-01	554	4.87E-01
405	7.69E-03	455	4.83E-02	505	1.72E-01	555	4.95E-01
406	1.14E-02	456	5.26E-02	506	1.64E-01	556	4.99E-01
407	6.03E-03	457	6.15E-02	507	1.59E-01	557	5.05E-01
408	1.27E-02	458	6.26E-02	508	1.56E-01	558	5.15E-01
409	1.12E-02	459	7.40E-02	509	1.54E-01	559	5.26E-01
410	1.21E-02	460	8.10E-02	510	1.55E-01	560	5.27E-01
411	4.94E-03	461	9.05E-02	511	1.52E-01	561	5.32E-01
412	9.23E-03	462	9.97E-02	512	1.57E-01	562	5.47E-01
413	1.23E-02	463	1.14E-01	513	1.60E-01	563	5.49E-01
414	9.09E-03	464	1.23E-01	514	1.56E-01	564	5.55E-01
415	1.16E-03	465	1.40E-01	515	1.60E-01	565	5.65E-01
416	6.64E-03	466	1.52E-01	516	1.64E-01	566	5.69E-01
417	0.00E+00	467	1.75E-01	517	1.68E-01	567	5.73E-01
418	2.19E-03	468	1.89E-01	518	1.72E-01	568	5.82E-01
419	4.76E-03	469	2.23E-01	519	1.76E-01	569	5.84E-01
420	6.40E-03	470	2.36E-01	520	1.76E-01	570	5.89E-01
421	2.50E-03	471	2.69E-01	521	1.88E-01	571	5.99E-01
422	3.74E-03	472	2.92E-01	522	1.95E-01	572	5.97E-01
423	4.76E-03	473	3.31E-01	523	1.99E-01	573	6.12E-01
424	2.35E-03	474	3.67E-01	524	2.11E-01	574	6.18E-01
425	1.06E-02	475	4.03E-01	525	2.16E-01	575	6.22E-01
426	5.77E-03	476	4.41E-01	526	2.26E-01	576	6.35E-01
427	5.20E-03	477	4.61E-01	527	2.33E-01	577	6.38E-01
428	6.53E-03	478	4.97E-01	528	2.45E-01	578	6.45E-01
429	4.15E-03	479	5.42E-01	529	2.53E-01	579	6.51E-01
						580	6.57E-01



### Spectral Power Distribution

$\lambda$ (nm)	Arb units	$\lambda$ (nm)	Arb units	$\lambda$ (nm)	Arb units	$\lambda$ (nm)	Arb units
581	6.66E-01	631	9.71E-01	681	7.80E-01	731	2.90E-01
582	6.75E-01	632	9.70E-01	682	7.71E-01	732	2.82E-01
583	6.75E-01	633	9.71E-01	683	7.64E-01	733	2.74E-01
584	6.85E-01	634	9.75E-01	684	7.51E-01	734	2.67E-01
585	6.94E-01	635	9.81E-01	685	7.48E-01	735	2.62E-01
586	7.01E-01	636	9.79E-01	686	7.32E-01	736	2.53E-01
587	7.09E-01	637	9.86E-01	687	7.23E-01	737	2.46E-01
588	7.13E-01	638	9.94E-01	688	7.10E-01	738	2.37E-01
589	7.16E-01	639	9.88E-01	689	7.04E-01	739	2.35E-01
590	7.28E-01	640	9.90E-01	690	6.86E-01	740	2.28E-01
591	7.32E-01	641	9.88E-01	691	6.79E-01	741	2.30E-01
592	7.46E-01	642	9.96E-01	692	6.63E-01	742	2.15E-01
593	7.42E-01	643	9.86E-01	693	6.53E-01	743	2.09E-01
594	7.53E-01	644	1.00E+00	694	6.43E-01	744	2.05E-01
595	7.61E-01	645	9.97E-01	695	6.36E-01	745	2.02E-01
596	7.68E-01	646	9.97E-01	696	6.28E-01	746	1.93E-01
597	7.80E-01	647	9.89E-01	697	6.14E-01	747	1.90E-01
598	7.79E-01	648	9.83E-01	698	5.98E-01	748	1.86E-01
599	7.87E-01	649	9.89E-01	699	5.87E-01	749	1.80E-01
600	8.02E-01	650	9.85E-01	700	5.79E-01	750	1.78E-01
601	8.05E-01	651	9.81E-01	701	5.65E-01	751	1.68E-01
602	8.07E-01	652	9.81E-01	702	5.51E-01	752	1.66E-01
603	8.24E-01	653	9.85E-01	703	5.44E-01	753	1.62E-01
604	8.28E-01	654	9.76E-01	704	5.33E-01	754	1.57E-01
605	8.39E-01	655	9.59E-01	705	5.23E-01	755	1.51E-01
606	8.38E-01	656	9.75E-01	706	5.13E-01	756	1.47E-01
607	8.44E-01	657	9.59E-01	707	5.02E-01	757	1.45E-01
608	8.53E-01	658	9.63E-01	708	4.97E-01	758	1.39E-01
609	8.53E-01	659	9.60E-01	709	4.80E-01	759	1.36E-01
610	8.62E-01	660	9.54E-01	710	4.71E-01	760	1.35E-01
611	8.73E-01	661	9.56E-01	711	4.62E-01	761	1.30E-01
612	8.80E-01	662	9.49E-01	712	4.52E-01	762	1.28E-01
613	8.84E-01	663	9.32E-01	713	4.46E-01	763	1.22E-01
614	8.93E-01	664	9.26E-01	714	4.33E-01	764	1.15E-01
615	8.96E-01	665	9.26E-01	715	4.26E-01	765	1.17E-01
616	9.04E-01	666	9.12E-01	716	4.17E-01	766	1.12E-01
617	9.10E-01	667	9.05E-01	717	4.08E-01	767	1.11E-01
618	9.20E-01	668	8.99E-01	718	4.00E-01	768	1.02E-01
619	9.16E-01	669	8.93E-01	719	3.86E-01	769	1.05E-01
620	9.26E-01	670	8.84E-01	720	3.77E-01	770	9.82E-02
621	9.26E-01	671	8.72E-01	721	3.71E-01	771	9.54E-02
622	9.31E-01	672	8.72E-01	722	3.60E-01	772	9.89E-02
623	9.40E-01	673	8.64E-01	723	3.52E-01	773	9.42E-02
624	9.45E-01	674	8.50E-01	724	3.42E-01	774	8.75E-02
625	9.45E-01	675	8.38E-01	725	3.40E-01	775	8.88E-02
626	9.50E-01	676	8.34E-01	726	3.28E-01	776	8.56E-02
627	9.62E-01	677	8.25E-01	727	3.17E-01	777	8.15E-02
628	9.59E-01	678	8.15E-01	728	3.13E-01	778	8.20E-02
629	9.62E-01	679	8.01E-01	729	3.07E-01	779	7.85E-02
630	9.64E-01	680	7.97E-01	730	2.98E-01	780	7.71E-02

### Measurement Uncertainty

The following is the reported expanded uncertainty of the UL 6440T Type C Mirror Goniophotometer. Colrimetric expanded uncertainty is estimated using the 1 metre integrating sphere

Parameter	Uncertainty
Total Luminous Flux (%)	$\pm 4.9$
Luminous Intensity (%)	$\pm 4.9$
Correlated Color Temperature	$\pm 100$ K
CRI	$\pm 2$
Chromaticity $x$	$\pm 0.005$
Chromaticity $y$	$\pm 0.005$
Temperature ( $^{\circ}$ C)	$\pm 1.0$
Voltage DC TY720 (%)	$\pm 0.017$
Current DC TY720 (%)	$\pm 0.10$
Voltage AC WT210 (%)	$\pm 0.059$
Current AC WT210 (%)	$\pm 0.025$
Power AC WT210 (%)	$\pm 0.23$
Frequency (50/60 Hz) WT210 (%)	$\pm 0.004$
Power Factor WT210 (%)	$\pm 0.06$

The reported expanded uncertainty is based on the combined standard uncertainty multiplied by a coverage factor of  $k = 2$ . This value of  $k$  gives a coverage probability of approximately 95%, assuming a normal distribution. This determination of the measurement uncertainty has been done in accordance with international requirements including UKAS, BIPM Guide to the Expression of Uncertainty in Measurement and CIE 198:2011 and CIE S 025/E:2015.

Electrical measurement equipment used for the determination of results for this report, are compliant and meet the performance requirements of the measurement standards used.

----- END OF REPORT -----



LUX-TSI Ltd., Pencoed Technology Park,  
Pencoed, Bridgend, CF35 5AQ, UK  
Website: [www.lux-tsi.com](http://www.lux-tsi.com)  
E-mail: [info@lux-tsi.com](mailto:info@lux-tsi.com)  
Test Report Number: GNC-21590  
Test Item: TI-15352

---

