

# PHOTOMETRIC TEST REPORT

---

VERSAILLES 250 PHASE DIMMABLE  
BONZE

astro

## LIGHT EFFICIENCY:

72 Lumen/Watt

## LIGHT QUALITY:

CRI: 87.4

## COLOR TEMPERATURE:

3007 K

OUTPUT: 320 lm

PEAK: 71.7 cd

POWER: 4.5 W

PF: 0.97

Tracking number: [n/a](#)

Product name:

Versailles 250 Phase Dimmable Bonze

Item number:


1380025

Date and time:

23/02/2021 11:20:42

Description:


IP44 Bathroom Wall Light

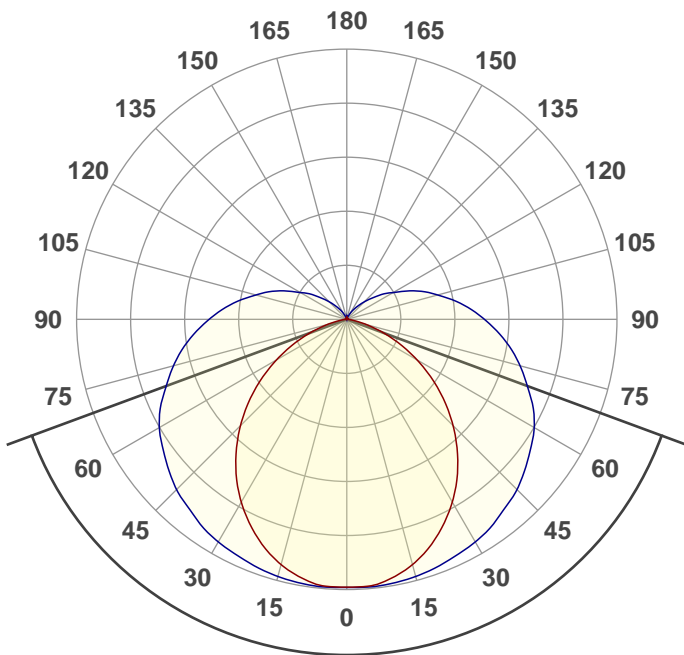


139.5°

CIE 1931  
x: 0.434  
y: 0.398



## SPECTRA

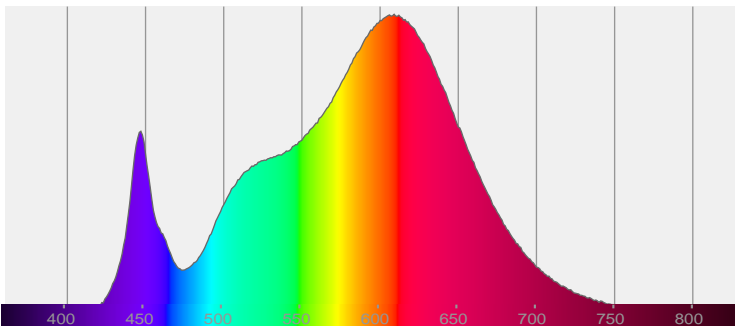

## POWER


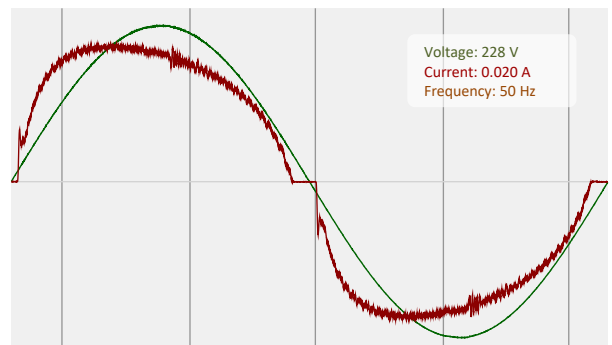
Voltage: 228 V  
Current: 0.020 A  
Frequency: 50 Hz

## COLOR DETAILS

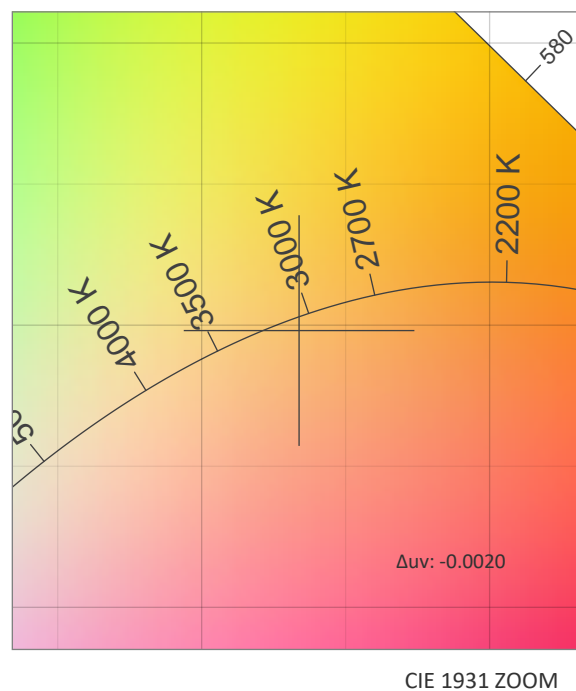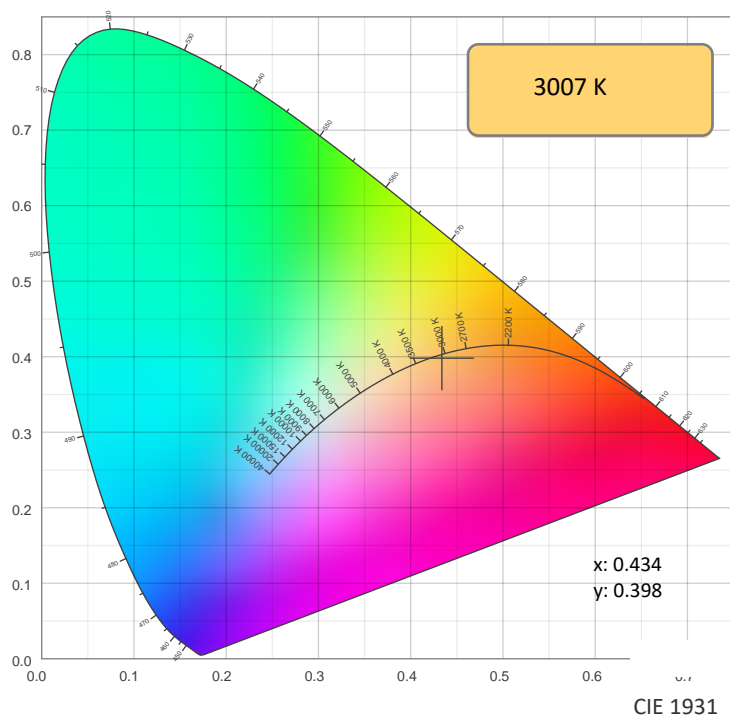

TM30: 87.2

CRI: 87.4 (R1-R8)

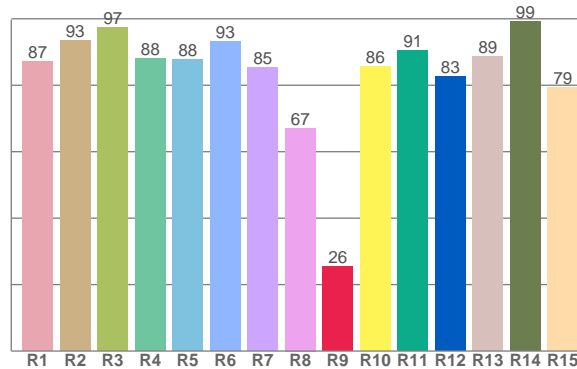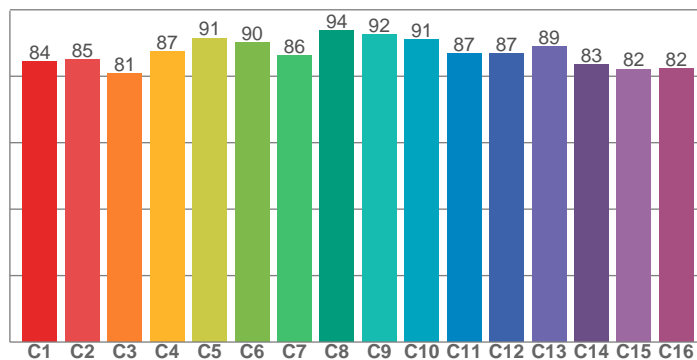

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
87.0	93.4	97.3	88.2	87.8	93.2	85.5	67.1	25.5	85.7	90.5	82.6	88.7	99.1	79.3


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
84.5	85.1	80.7	87.3	91.5	90.1	86.3	93.6	92.4	91.1	86.8	86.8	88.9	83.4	82.1	82.2

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
79.6	96.4	85.6	86.7	88.3	86.5	86.1	88.2	96.0	90.5	88.9	86.5	85.8	76.4	77.2

CQS: 85.4

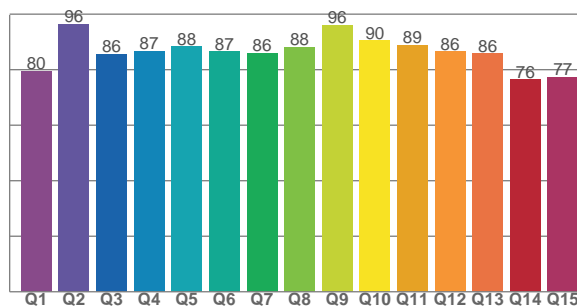





## COLOR PARAMETERS

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
3007 K	87.4	25.5	87.2	100.1	85.4	0.434	0.398	0.251	0.346	-0.0020


**Rf 87.2**  
Fidelity index Rf

**Rg 100.1**  
Gammut index Rg

Hue Bin	Graphic shifts (%)		
	R <sub>f</sub>	Chroma	Hue
1	84	-9%	-2%
2	85	-6%	6%
3	81	-1%	10%
4	87	4%	7%
5	91	5%	4%
6	90	6%	-2%
7	86	2%	-8%
8	94	0%	-4%
9	92	-4%	-2%
10	91	-4%	3%
11	87	-1%	8%
12	87	5%	3%
13	89	6%	-5%
14	83	5%	-13%
15	82	0%	-12%
16	82	-5%	-13%

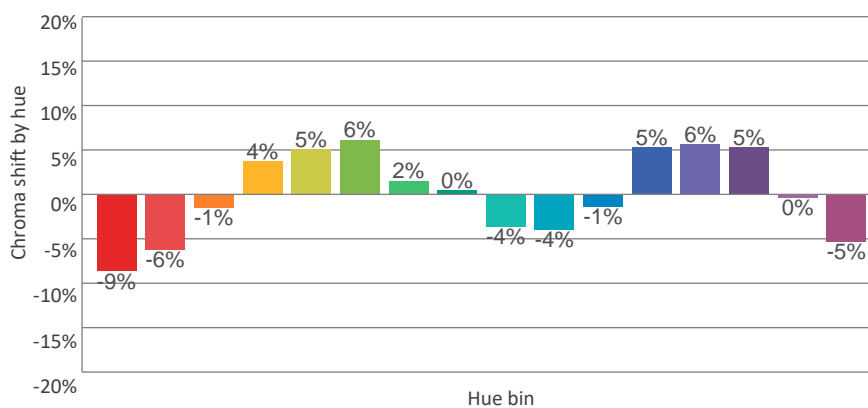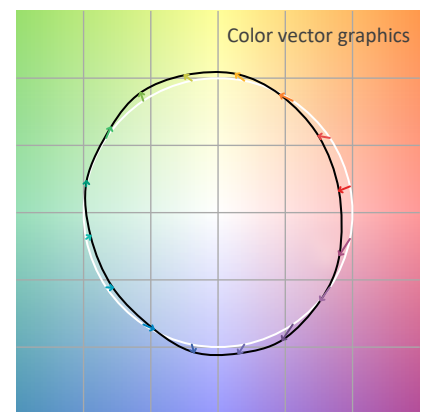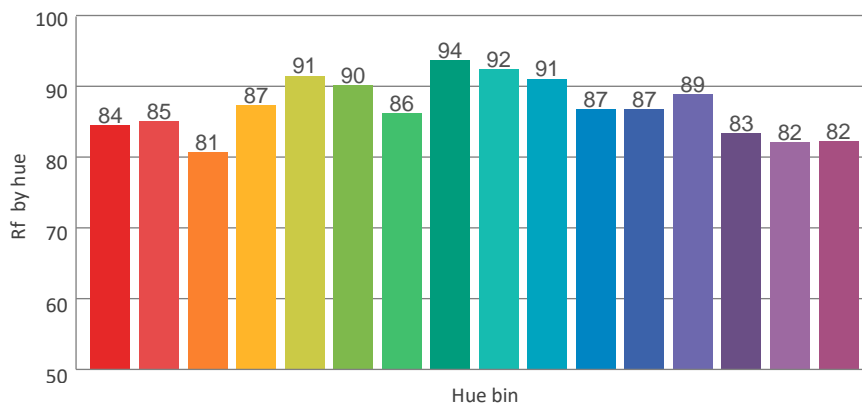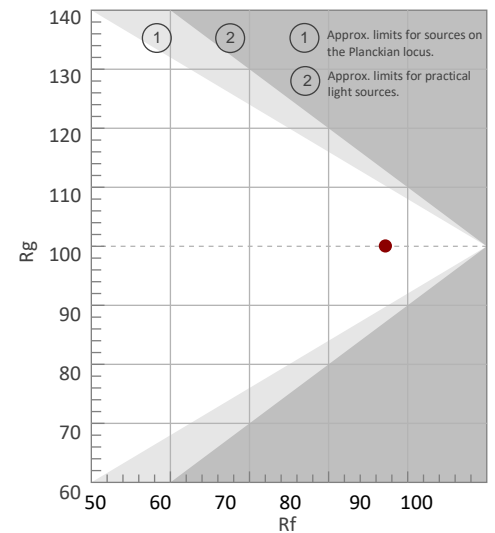

## BEAM DETAILS

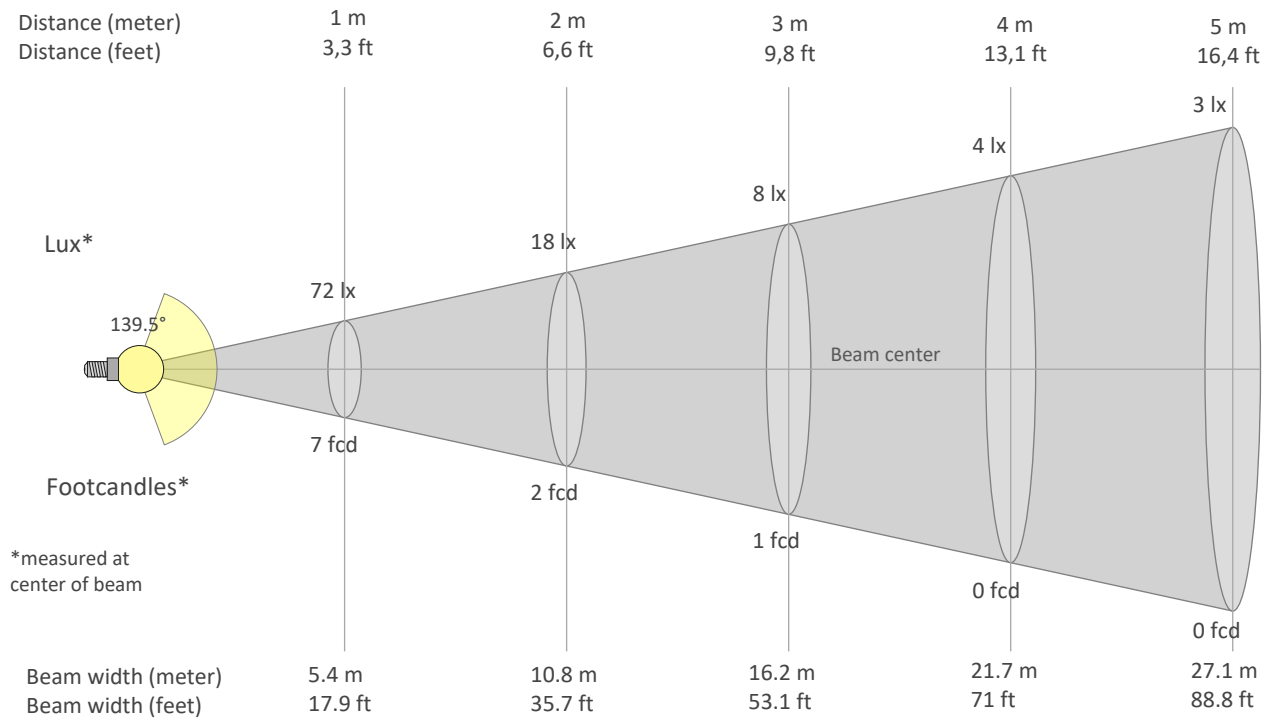

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
72lx	18lx	8lx	4lx	3lx	2lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx
6.7fcd	1.7fcd	0.7fcd	0.4fcd	0.3fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
71.7	70.4	65.9	59.0	50.3	40.1	29.2	18.1	8.3	1.9	0.2	0.2	0.2	0.3	0.3	0.3	0.4	0.4	0.4	0.4
100%	98%	92%	82%	70%	56%	41%	25%	12%	3%	0%	0%	0%	0%	0%	0%	1%	1%	1%	1%

Intensities in 90° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
71.7	71.6	70.7	69.1	67.1	64.2	60.4	56.0	49.9	43.7	36.8	29.9	23.1	16.4	11.1	6.6	3.5	1.3	0.5	0.4
100%	100%	99%	96%	94%	90%	84%	78%	70%	61%	51%	42%	32%	23%	16%	9%	5%	2%	1%	1%

Intensities in 180° c-plane


0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
71.7	70.4	65.9	59.0	50.3	40.1	29.2	18.1	8.3	1.9	0.2	0.2	0.2	0.3	0.3	0.3	0.4	0.4	0.4	0.4
100%	98%	92%	82%	70%	56%	41%	25%	12%	3%	0%	0%	0%	0%	0%	0%	1%	1%	1%	1%

Intensities in 270° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
71.7	71.6	70.7	69.1	67.1	64.2	60.4	56.0	49.9	43.7	36.8	29.9	23.1	16.4	11.1	6.6	3.5	1.3	0.5	0.4
100%	100%	99%	96%	94%	90%	84%	78%	70%	61%	51%	42%	32%	23%	16%	9%	5%	2%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
139.5°	224.5°	258.5°	54.6%	35.6%

ISO CANDELA DIAGRAM

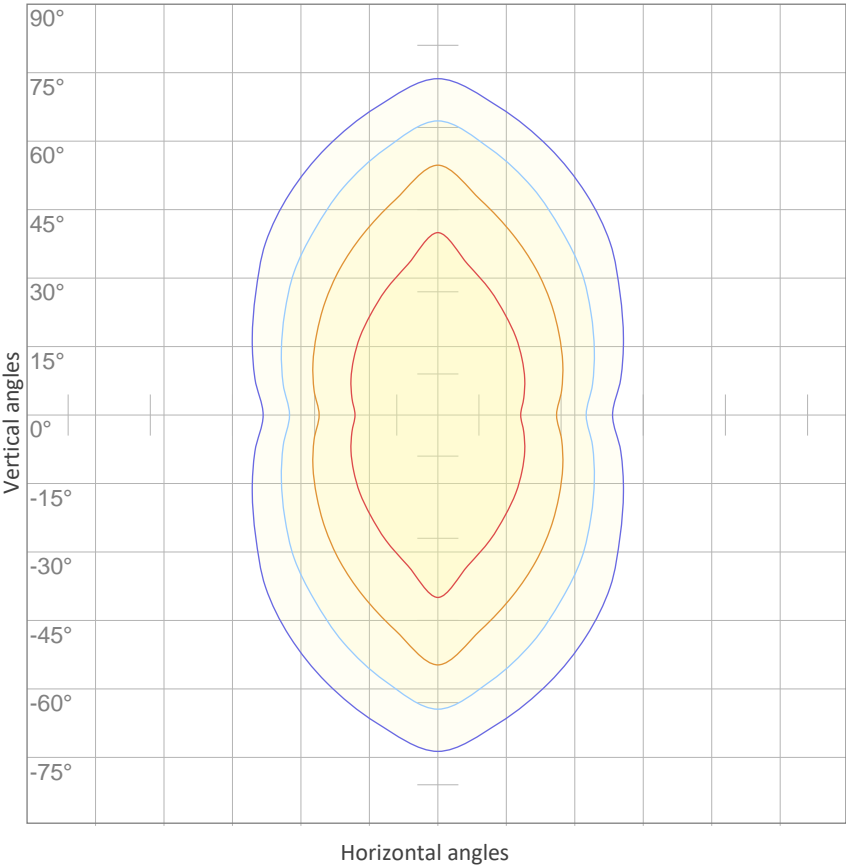


10%	7 cd
20%	14 cd
30%	21 cd
40%	29 cd
50%	36 cd
60%	43 cd
70%	50 cd
80%	57 cd
90%	64 cd

Conditions:

Number of c-planes: 8

Candela at center: 72 cd

ISO LUX DIAGRAM

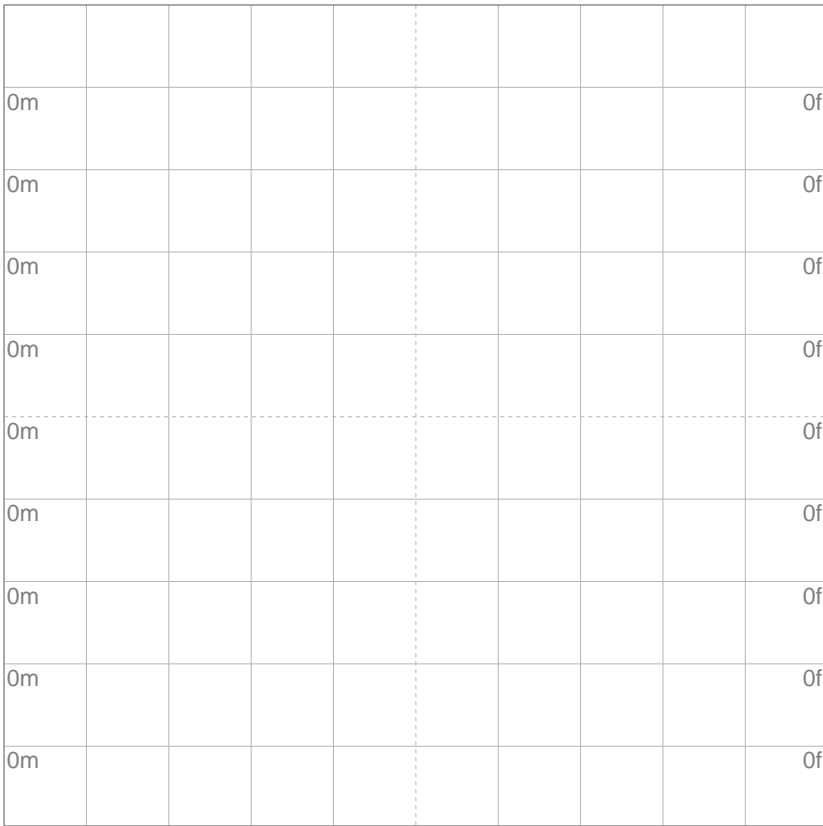

3%	21.5m lx
5%	35.8m lx
10%	71.7m lx
30%	0.215 lx
50%	{LUX_10M50} lx

Conditions:

Number of c-planes: 8

Lux at center: 0.717 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters (33 feet)


## UGR

## GLARE EVALUATION ACCORDING TO UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X    Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	10.4	11.6	10.9	12.2	12.7	14.2	15.4	14.7	15.9	16.5
	3H	11.2	12.4	11.9	13.0	13.5	16.6	17.8	17.2	18.3	18.9
	4H	11.5	12.6	12.1	13.1	13.7	17.9	19.0	18.5	19.6	20.2
	6H	11.6	12.6	12.1	13.1	13.8	19.3	20.3	19.8	20.8	21.5
	8H	11.6	12.6	12.1	13.1	13.8	19.9	20.9	20.5	21.5	22.2
	12H	11.5	12.6	12.1	13.1	13.8	20.6	21.6	21.2	22.1	22.9
4H	2H	11.7	12.8	12.3	13.4	13.9	14.5	15.6	15.1	16.1	16.7
	3H	12.9	13.9	13.5	14.5	15.2	17.2	18.2	17.8	18.7	19.5
	4H	13.3	14.4	13.9	14.8	15.6	18.6	19.6	19.2	20.1	20.9
	6H	13.5	14.4	14.2	15.0	15.6	20.1	20.9	20.8	21.5	22.2
	8H	13.6	14.3	14.3	15.0	15.6	20.8	21.6	21.5	22.2	22.9
	12H	13.6	14.2	14.3	14.9	15.6	21.6	22.3	22.3	23.0	23.7
8H	4H	14.4	15.1	15.0	15.7	16.4	18.7	19.5	19.4	20.1	20.8
	6H	14.9	15.5	15.6	16.2	17.0	20.4	21.0	21.1	21.7	22.5
	8H	15.1	15.7	15.9	16.4	17.3	21.3	21.9	22.1	22.6	23.5
	12H	15.3	15.7	16.0	16.5	17.3	22.3	22.8	23.1	23.5	24.3
12H	4H	14.6	15.3	15.3	16.0	16.7	18.7	19.3	19.4	20.0	20.8
	6H	15.4	15.9	16.1	16.7	17.6	20.5	21.0	21.2	21.7	22.6
	8H	15.8	16.2	16.5	17.0	17.8	21.4	21.9	22.2	22.6	23.5
Variation of the observer position for the luminaire distance S											
S = 1.0H		0.1 / -0.1					0.1 / -0.1				
S = 1.5H		0.2 / -0.4					0.2 / -0.2				
S = 2.0H		0.4 / -0.8					0.3 / -0.3				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 320 lm total luminous flux											

## COEFFICIENTS OF UTILIZATION

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	115	115	115	115	111	111	111	111	102	102	102	94	94	94	87	87	87	84
1	102	96	90	85	97	92	87	83	85	81	77	78	75	72	72	69	67	63
2	91	82	74	67	87	79	71	65	72	66	61	66	62	57	61	57	54	50
3	83	71	62	55	79	68	60	53	63	56	50	58	52	47	53	48	44	41
4	75	62	53	46	72	60	51	44	55	48	42	51	45	40	47	42	37	35
5	69	55	46	39	66	53	44	38	49	42	36	45	39	34	42	36	32	29
6	64	50	40	33	61	48	39	33	44	37	31	41	34	29	38	32	28	25
7	59	45	36	29	56	43	35	29	40	33	27	37	31	26	35	29	25	22
8	55	41	32	26	52	39	31	25	37	29	24	34	28	23	32	26	22	20
9	51	37	29	23	49	36	28	23	34	27	22	31	25	21	29	24	20	18
10	48	34	26	21	46	33	25	20	31	24	19	29	23	19	27	22	18	16

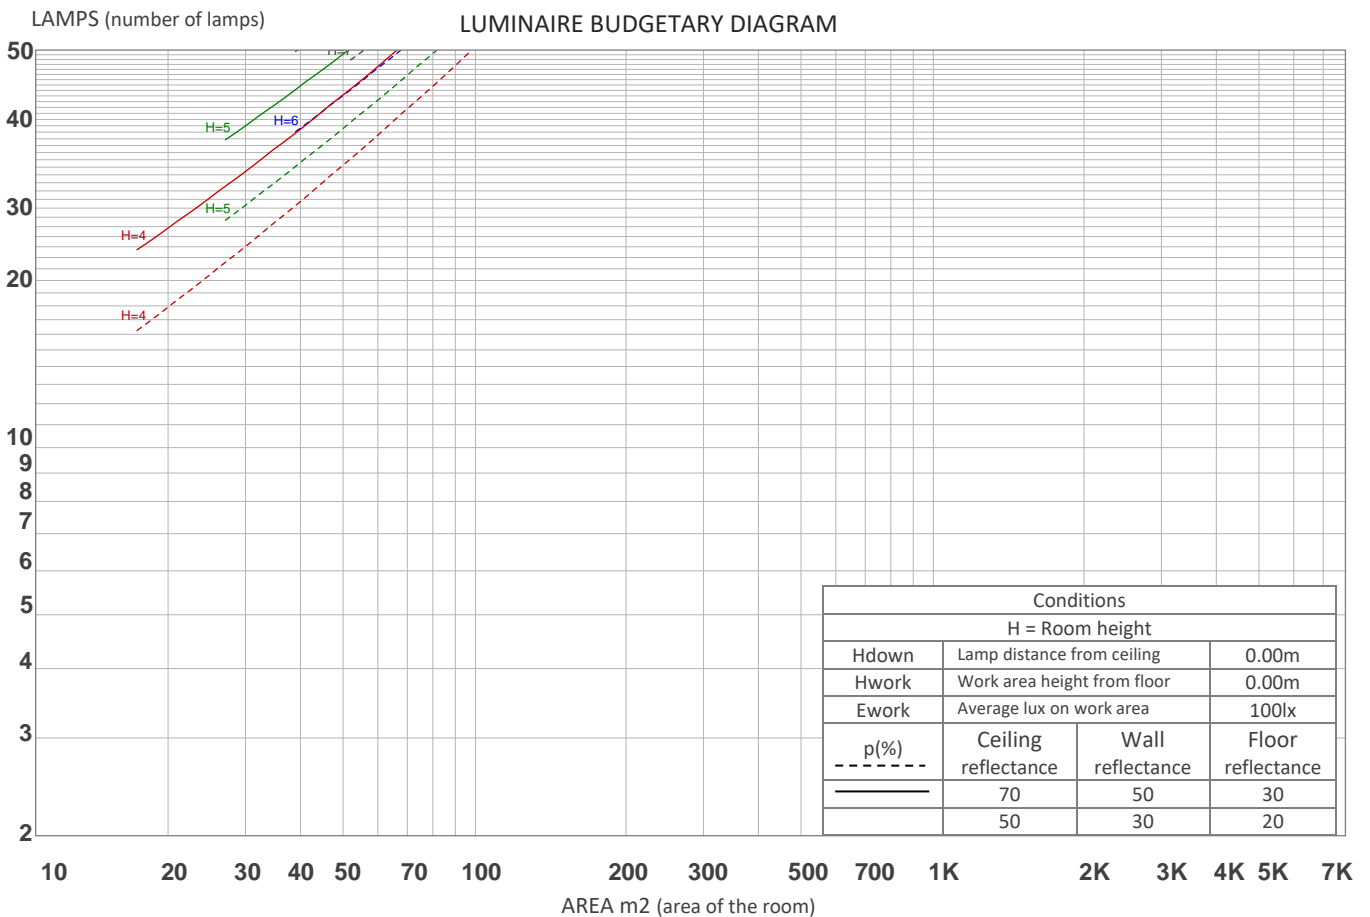

## ZONAL LUMEN SUMMARY

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
6.81 lm	19.6 lm	30.1 lm	37.3 lm	40.7 lm	40.3 lm	36.8 lm	31.2 lm	25.2 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
19.5 lm	14.1 lm	9.19 lm	5.36 lm	2.66 lm	1.000 lm	0.287 lm	0.113 lm	0.036 lm




## FLICKER


FLICKER CURVE (COMPLETE SAMPLED FLICKER)



FLICKER FRAME (FRAME OF ONE FLICKER PERIOD)

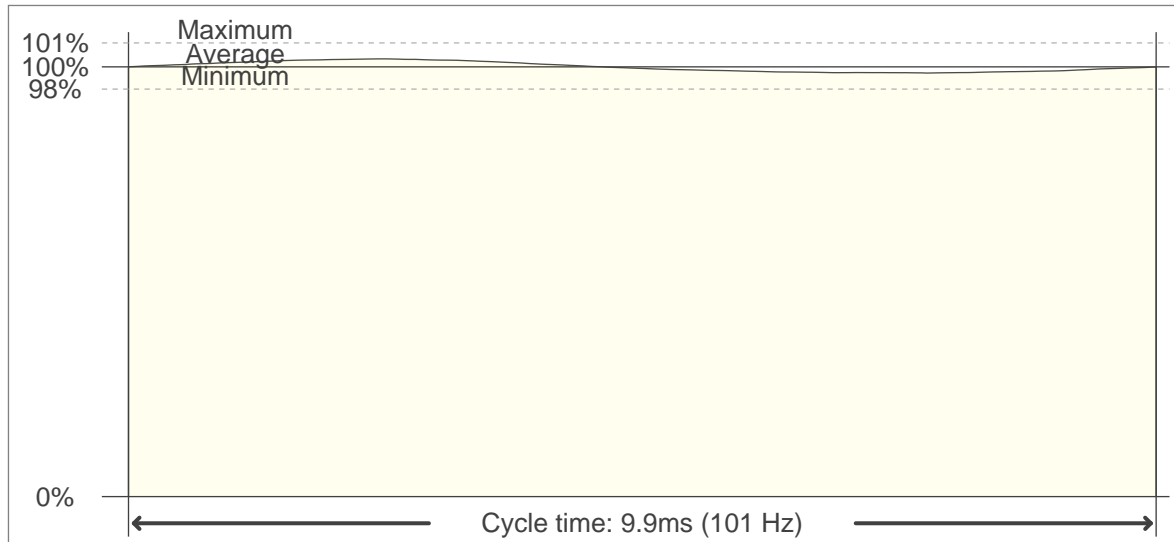

FLICKER FFT (FREQUENCY SCOPE OF FLICKER CURVE)

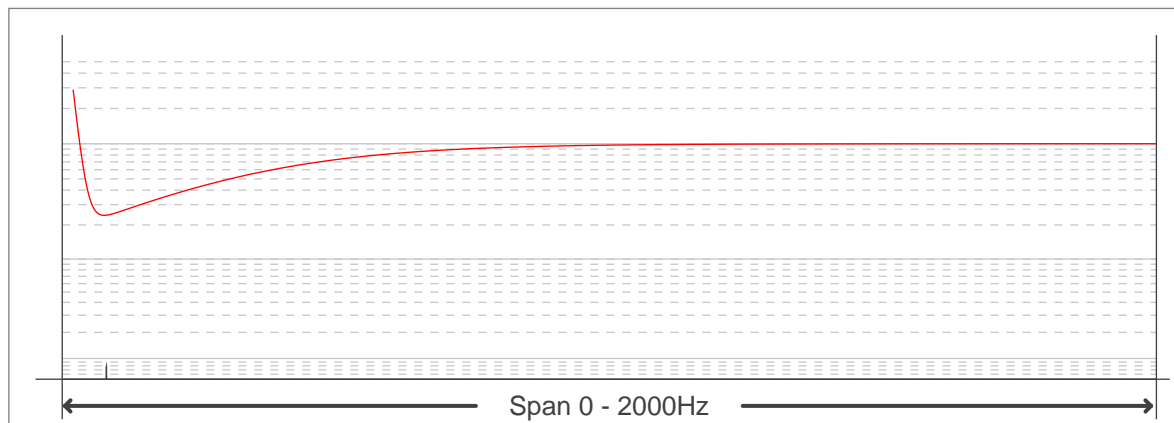

## FLICKER RESULTS:

Flicker frequency:	101.01 Hz
Flicker index:	0.01
Flicker percentage:	1.73 %
SVM: (Visual flicker)	0.06

## FLICKER CONDITIONS:

Sample rate:	20000 samples/second
--------------	----------------------