

PHOTOMETRIC TEST REPORT

DECOR PRO ROUND
ADJUSTABLE - TEXTURED WHITE
- 4002867

astro

DECOR PRO ROUND ADJUSTABLE -

astro

LIGHT EFFICIENCY:




OUTPUT: 884 lm

LIGHT QUALITY:



PEAK: 1677 cd

COLOR TEMPERATURE:



POWER: 11.8 W

PF: 0.95




Tracking number: [n/a](#)

Product name:
Decor Pro Round Adjustable - Textured
White - 4002867

Item number:
DRA-TW-HQ27G1-50G1-X-D1


Date and time:
20/12/2024 12:21:51

Description:
IP20 LED Downlight

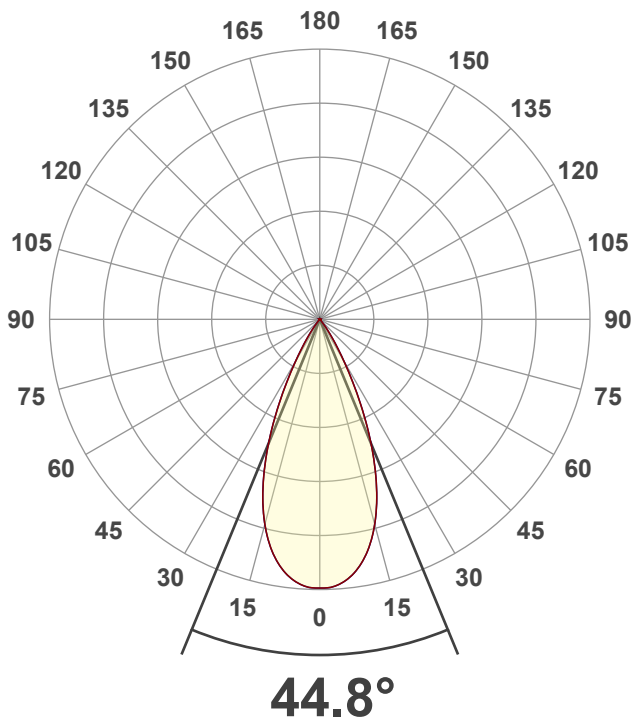


CIE 1931
x: 0.457
y: 0.410



SPECTRA

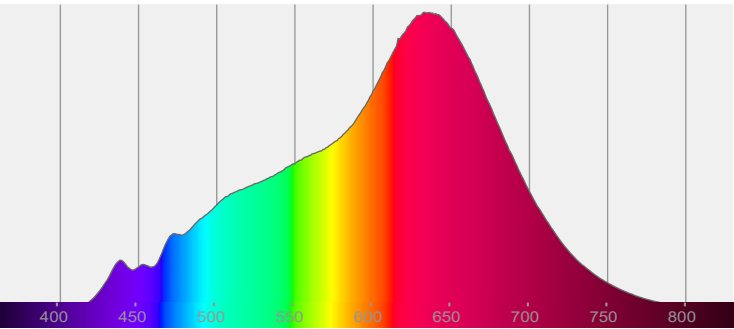

POWER

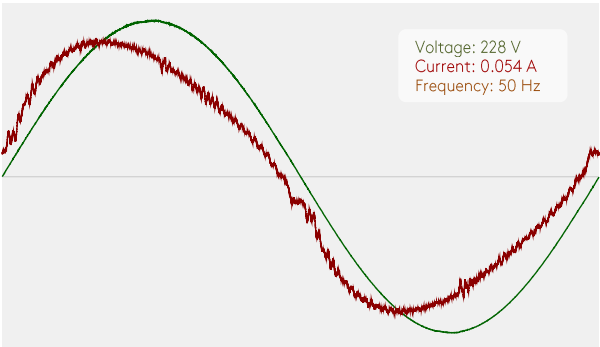


COLOR DETAILS

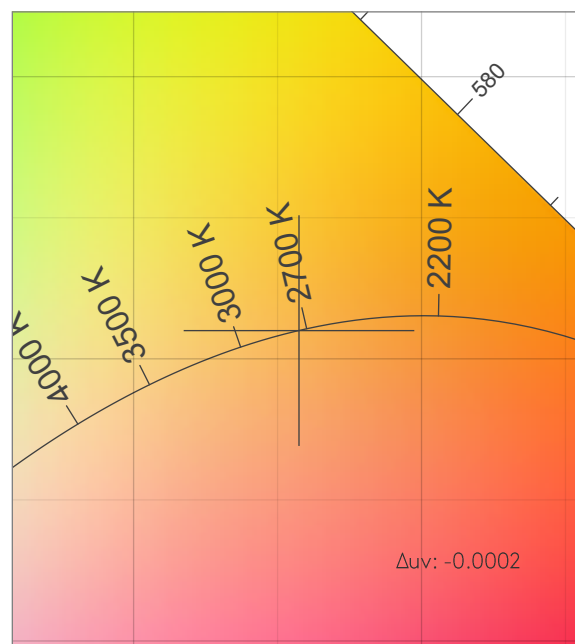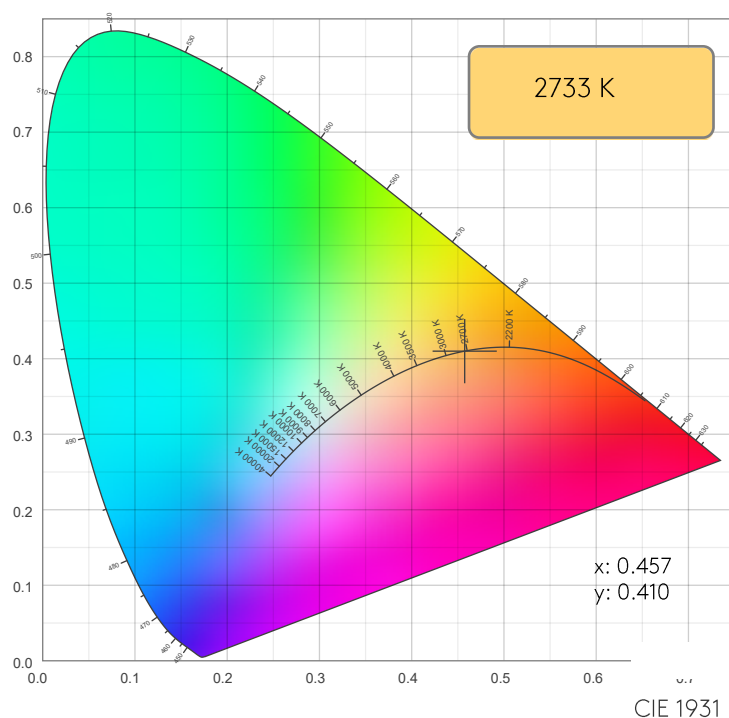


CIE 1931 ZOOM

TM30: 94.2

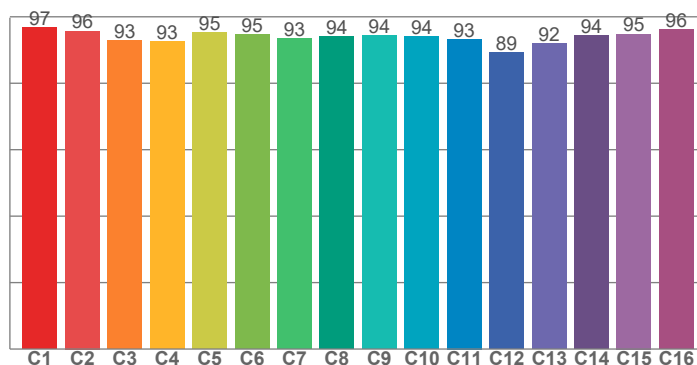

CRI: 94.8 (R1-R8)

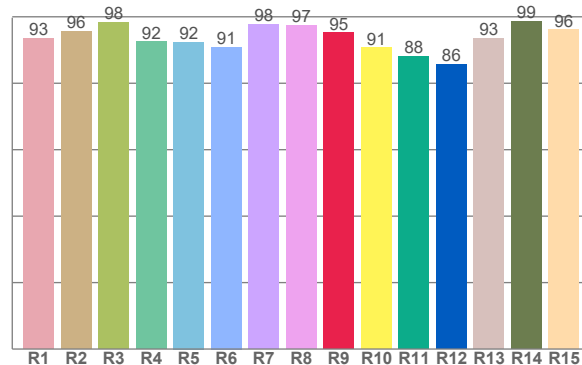

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.5	95.5	98.3	92.5	92.4	90.9	97.8	97.4	95.2	90.6	88.0	85.6	93.4	98.6	96.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
96.8	95.7	92.8	92.6	95.3	94.7	93.4	94.0	94.4	94.0	93.3	89.3	91.9	94.4	94.8	96.2

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93.9	93.9	91.9	91.2	94.1	96.9	92.5	92.0	92.4	91.5	92.1	92.2	93.9	95.5	94.5

CQS: 93.0

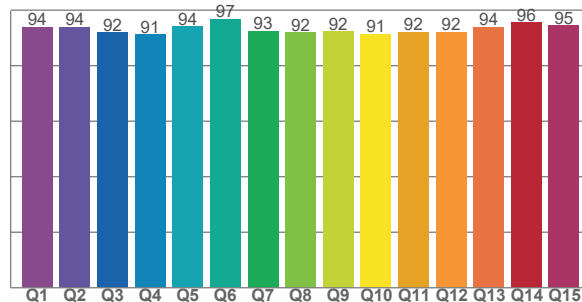







COLOR PARAMETERS

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2733 K	94.8	95.2	94.2	99.5	93.0	0.457	0.410	0.261	0.351	-0.0002


Rf 94.2
Fidelity index Rf

Rg 99.5
Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	97	1%	1%
2	96	2%	-2%
3	93	0%	-4%
4	93	-3%	-4%
5	95	-3%	-1%
6	95	-2%	3%
7	93	-1%	4%
8	94	3%	3%
9	94	3%	2%
10	94	3%	-1%
11	93	3%	-4%
12	89	1%	-7%
13	92	-1%	-6%
14	94	-2%	-3%
15	95	-2%	1%
16	96	-1%	-1%

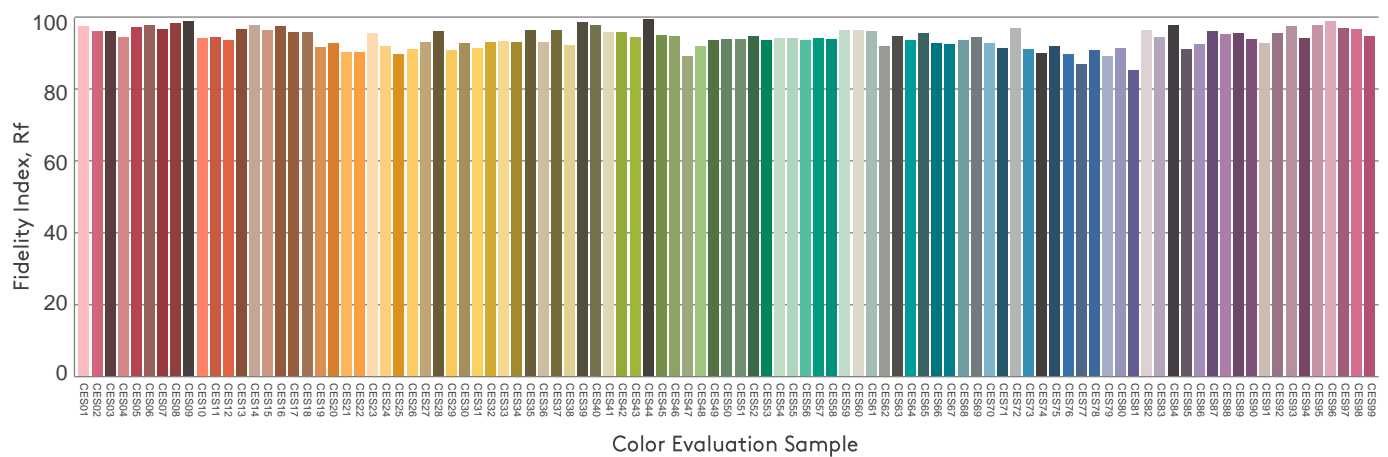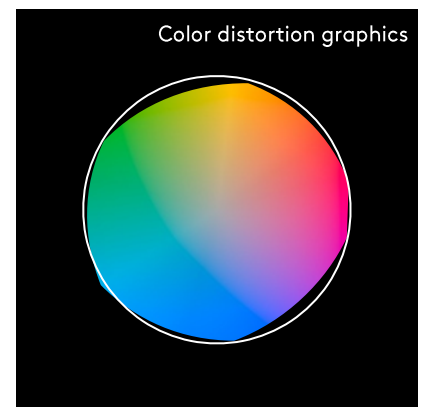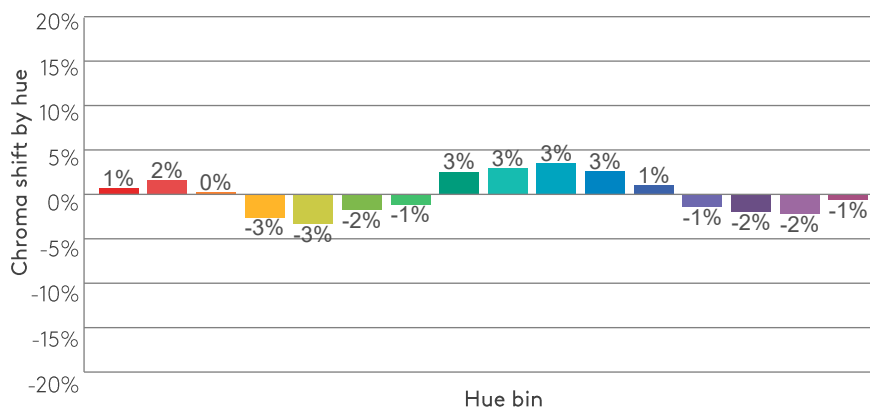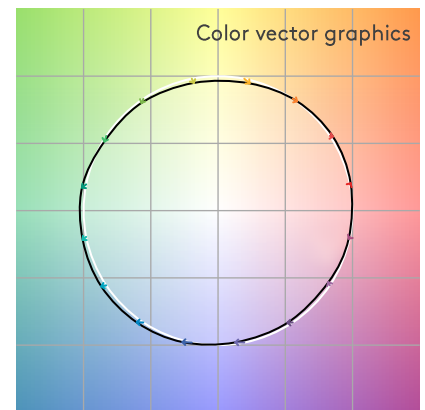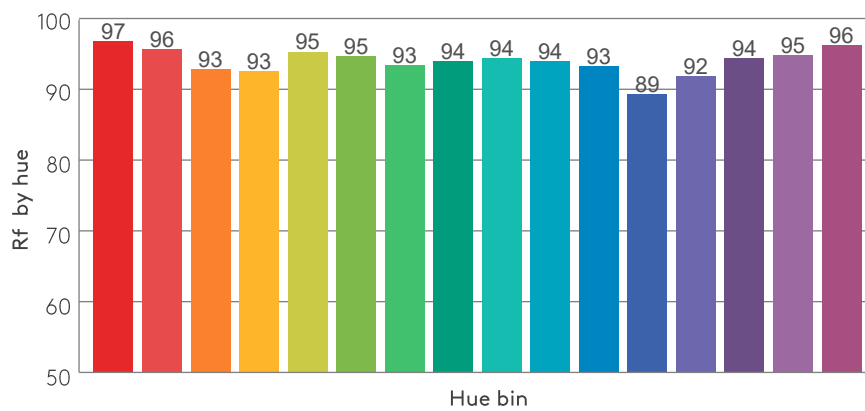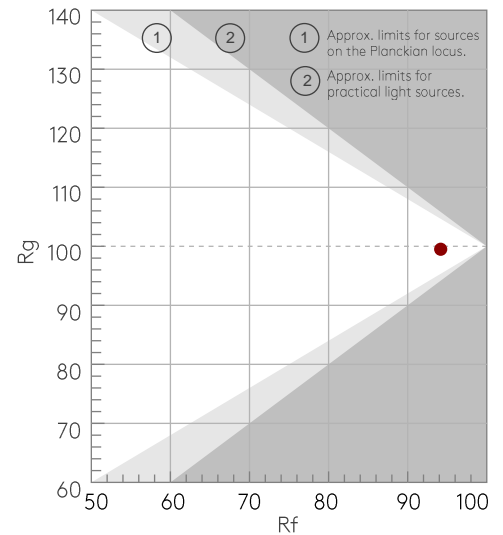

BEAM DETAILS

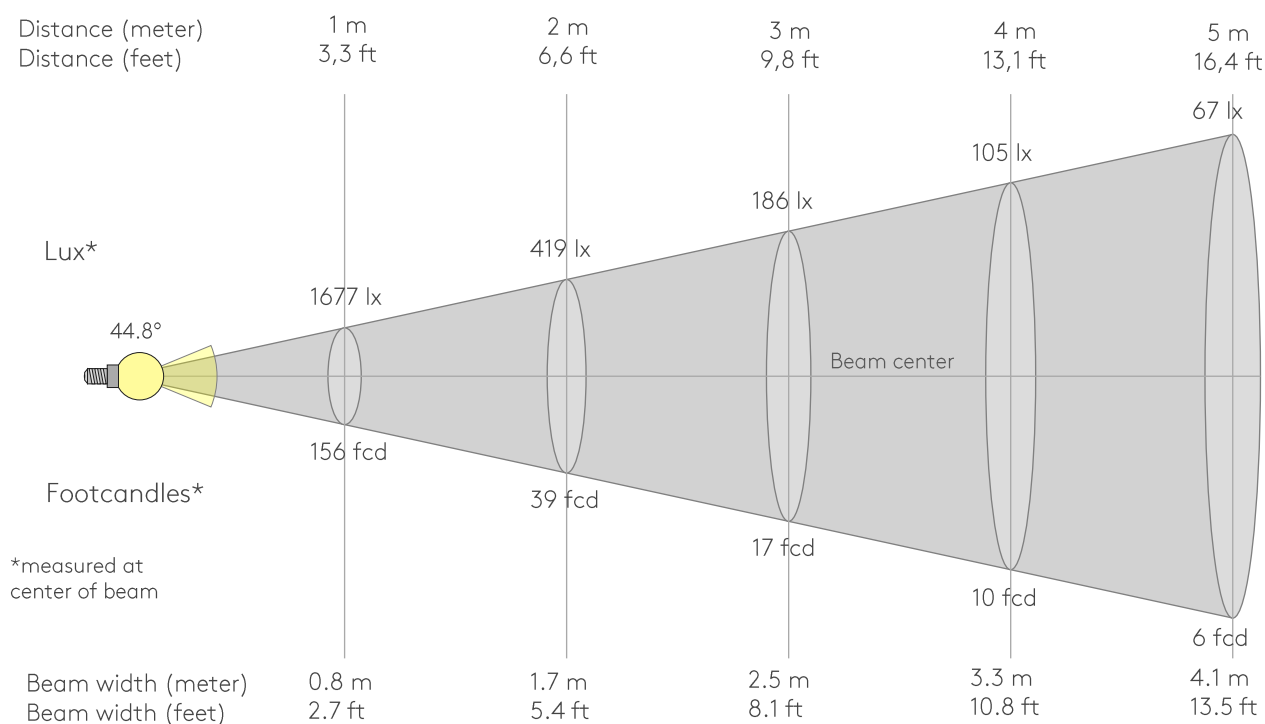

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1677lx	419lx	186lx	105lx	67lx	47lx	34lx	26lx	21lx	17lx	14lx	12lx	10lx	9lx	7lx	7lx	6lx	5lx	5lx	4lx
155.8fcd	39fcd	17.3fcd	9.7fcd	6.2fcd	4.3fcd	3.2fcd	2.4fcd	1.9fcd	1.6fcd	1.3fcd	1.1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd	0.4fcd	0.4fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1677	1675	1661	1632	1591	1534	1462	1374	1270	1150	1016	871	718	566	423	302	207	134	79	41
100%	100%	99%	97%	95%	91%	87%	82%	76%	69%	61%	52%	43%	34%	25%	18%	12%	8%	5%	2%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1677	1675	1661	1632	1591	1534	1462	1374	1270	1150	1016	871	718	566	423	302	207	134	79	41
100%	100%	99%	97%	95%	91%	87%	82%	76%	69%	61%	52%	43%	34%	25%	18%	12%	8%	5%	2%

Intensities in 180° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1677	1675	1661	1632	1591	1534	1462	1374	1270	1150	1016	871	718	566	423	302	207	134	79	41
100%	100%	99%	97%	95%	91%	87%	82%	76%	69%	61%	52%	43%	34%	25%	18%	12%	8%	5%	2%

Intensities in 270° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1677	1675	1661	1632	1591	1534	1462	1374	1270	1150	1016	871	718	566	423	302	207	134	79	41
100%	100%	99%	97%	95%	91%	87%	82%	76%	69%	61%	52%	43%	34%	25%	18%	12%	8%	5%	2%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
44.8°	66.1°	75.9°	99.8%	99.6%

ISO CANDELA DIAGRAM

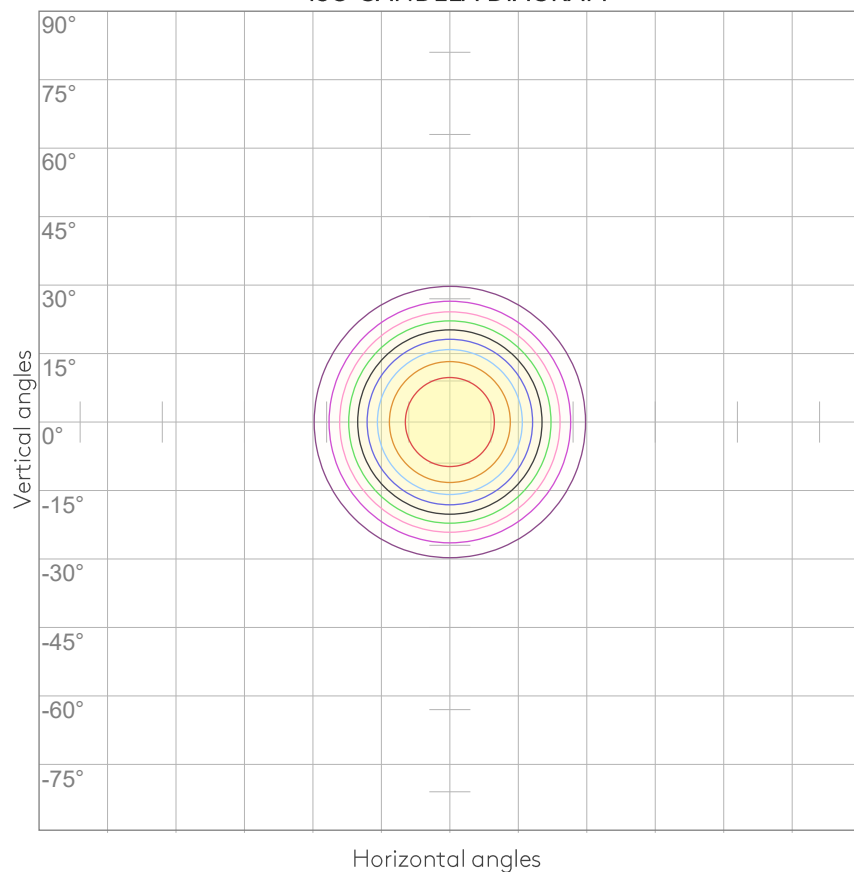

ISO LUX DIAGRAM

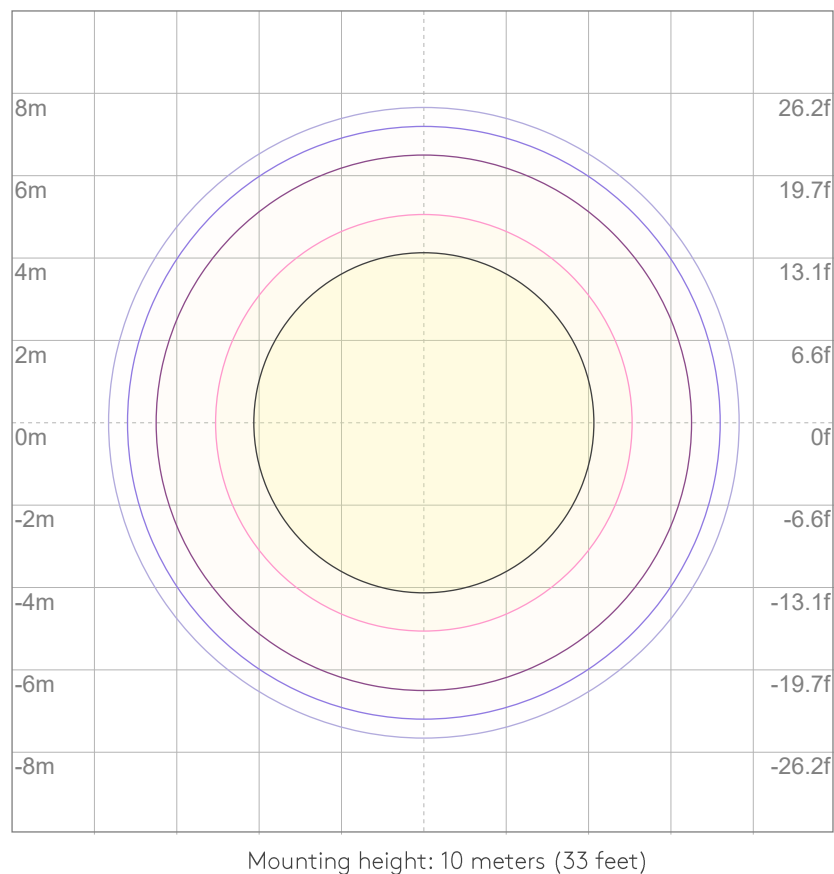

UGR

GLARE EVALUATION ACCORDING TO UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	16.6	17.1	16.7	17.3	17.5	16.6	17.1	16.7	17.3	17.5
	3H	16.3	17.0	16.7	17.2	17.3	16.3	17.0	16.7	17.2	17.3
	4H	16.2	16.9	16.6	17.1	17.3	16.2	16.9	16.6	17.1	17.3
	6H	16.2	16.8	16.5	17.1	17.4	16.2	16.8	16.5	17.1	17.4
	8H	16.2	16.7	16.5	17.0	17.4	16.2	16.7	16.5	17.0	17.4
	12H	16.1	16.6	16.5	17.0	17.4	16.1	16.6	16.5	17.0	17.4
4H	2H	16.2	16.9	16.6	17.1	17.3	16.2	16.9	16.6	17.1	17.3
	3H	16.1	16.6	16.5	17.0	17.4	16.1	16.6	16.5	17.0	17.4
	4H	16.0	16.4	16.4	16.9	17.4	16.0	16.4	16.4	16.9	17.4
	6H	15.9	16.4	16.4	16.7	17.1	15.9	16.4	16.4	16.7	17.1
	8H	15.8	16.3	16.4	16.6	17.0	15.8	16.3	16.4	16.6	17.0
	12H	15.8	16.1	16.3	16.5	17.0	15.8	16.1	16.3	16.5	17.0
8H	4H	15.8	16.3	16.4	16.6	17.0	15.8	16.3	16.4	16.6	17.0
	6H	15.8	16.1	16.3	16.5	17.1	15.8	16.1	16.3	16.5	17.1
	8H	15.8	16.0	16.3	16.5	17.1	15.8	16.0	16.3	16.5	17.1
	12H	15.7	15.9	16.3	16.4	17.0	15.7	15.9	16.3	16.4	17.0
12H	4H	15.8	16.1	16.3	16.5	17.0	15.8	16.1	16.3	16.5	17.0
	6H	15.8	16.0	16.3	16.5	17.1	15.8	16.0	16.3	16.5	17.1
	8H	15.7	15.9	16.3	16.4	17.0	15.7	15.9	16.3	16.4	17.0
Variation of the observer position for the luminaire distance S											
S = 1.0H		6.6 / -22.4					6.6 / -22.4				
S = 1.5H		9.4 / -26.2					9.4 / -26.2				
S = 2.0H		11.4 / -28.1					11.4 / -28.1				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 884 lm total luminous flux											

COEFFICIENTS OF UTILIZATION

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95
2	110	106	102	99	108	104	101	98	101	98	96	98	96	94	95	93	92	90
3	105	100	96	92	104	99	95	92	96	93	90	94	91	89	92	89	87	86
4	101	95	90	87	100	94	90	86	92	88	85	90	87	84	88	85	83	82
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78
6	93	86	81	77	92	85	81	77	84	80	77	83	79	76	81	78	76	74
7	90	82	77	74	89	81	77	73	80	76	73	79	75	73	78	75	72	71
8	86	79	74	70	85	78	73	70	77	73	70	76	72	69	75	72	69	68
9	83	75	70	67	82	75	70	67	74	70	67	73	69	66	72	69	66	65
10	80	72	67	64	79	72	67	64	71	67	64	70	66	64	70	66	63	62

LAMPS (number of lamps)

LUMINAIRE BUDGETARY DIAGRAM

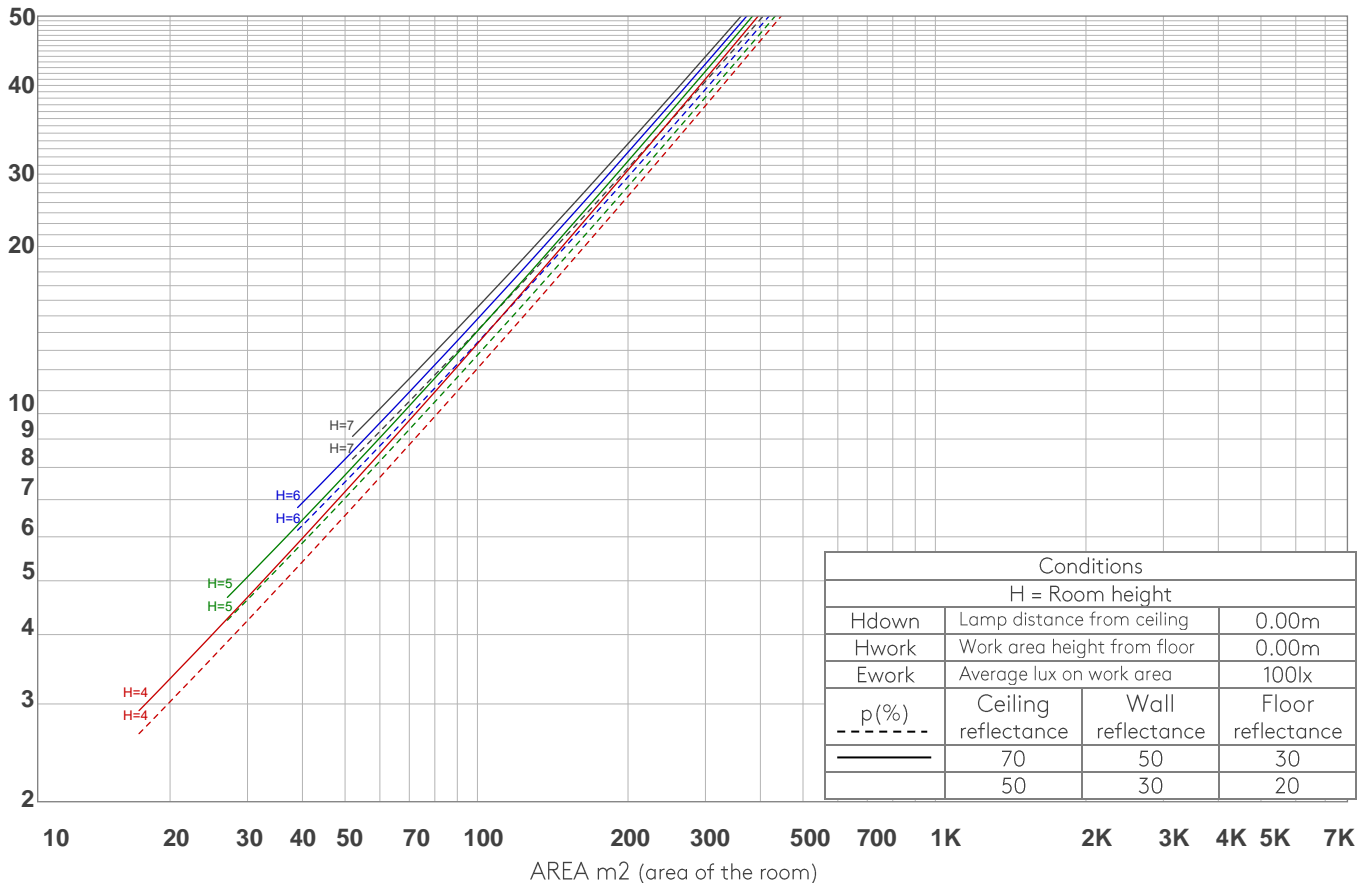

ZONAL LUMEN SUMMARY


0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
154 lm	363 lm	289 lm	73.4 lm	3.56 lm	0.745 lm	0.126 lm	0.028 lm	0.037 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.040 lm	0.041 lm	0.041 lm	0.068 lm	0.168 lm	0.328 lm	0.375 lm	0.255 lm	0.076 lm

FLICKER


FLICKER CURVE (COMPLETE SAMPLED)



FLICKER FRAME (FRAME OF ONE FLICKER

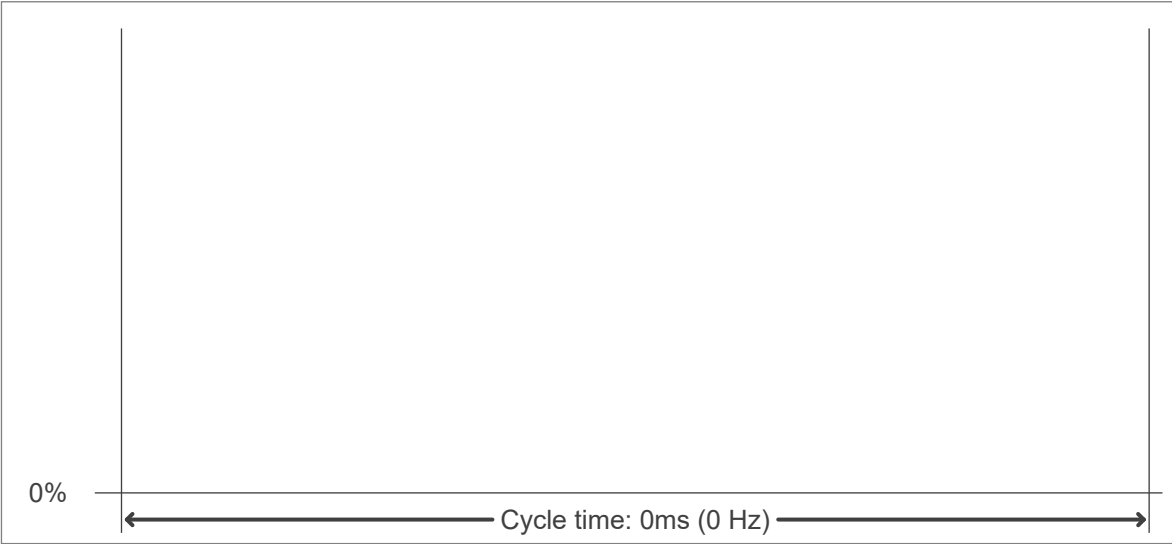

FLICKER FFT (FREQUENCY SCOPE OF FLICKER

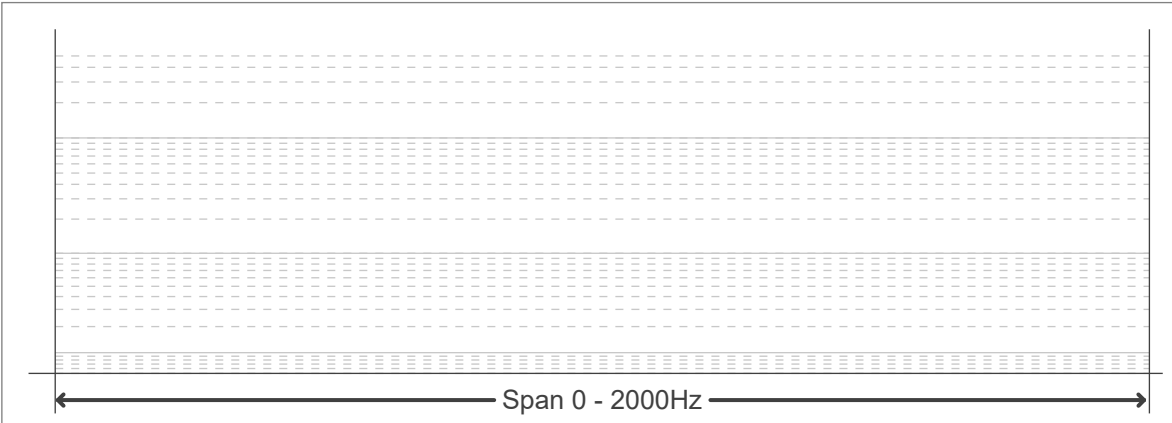

FLICKER RESULTS:

Flicker frequency:	n/a Hz
Flicker index:	n/a
Flicker percentage:	n/a %
SVM: (Visual flicker)	n/a

FLICKER CONDITIONS:

Sample rate:	n/a samples/second
--------------	--------------------