

PHOTOMETRIC TEST REPORT

TRIMLESS PRO ROUND FIXED
IP65 - MATT WHITE - 4002355

astro

TRIMLESS PRO ROUND FIXED IP65 - MATT

astro


LIGHT EFFICIENCY:




LIGHT QUALITY:



COLOR TEMPERATURE:



OUTPUT: 1199 lm
PEAK: 6135 cd
POWER: 11.8 W
PF: 0.95

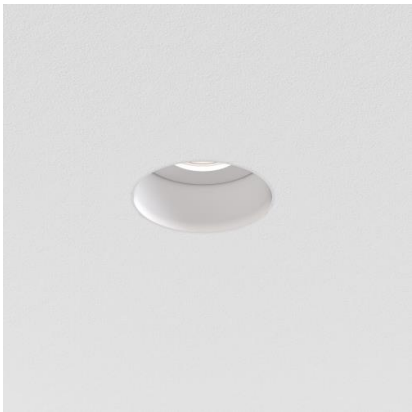


Tracking number: [n/a](#)

Product name:
Trimless Pro Round Fixed IP65 - Matt
White - 4002355

Item number:
TRF-MW-HE30G1-15G1-X-D1


Date and time:
23/01/2025 15:32:28

Description:
IP65 LED Downlight

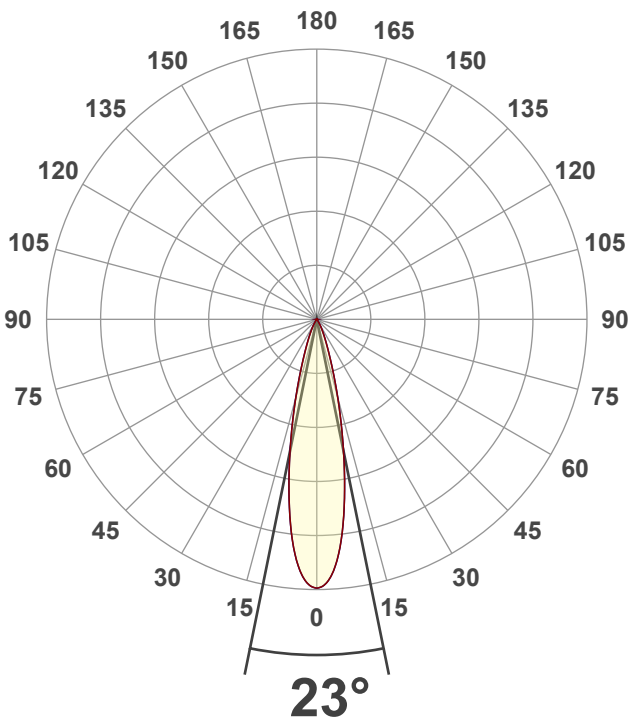


CIE 1931
x: 0.439
y: 0.408



SPECTRA

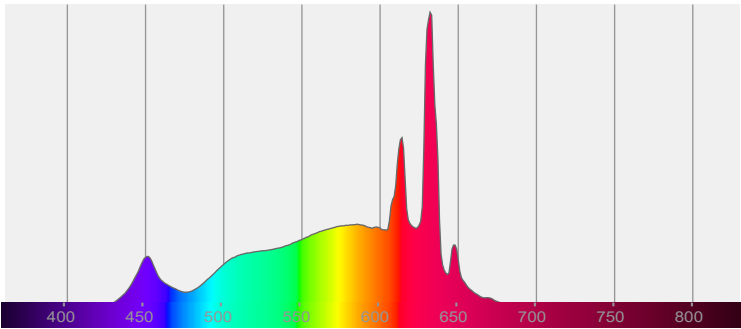


POWER

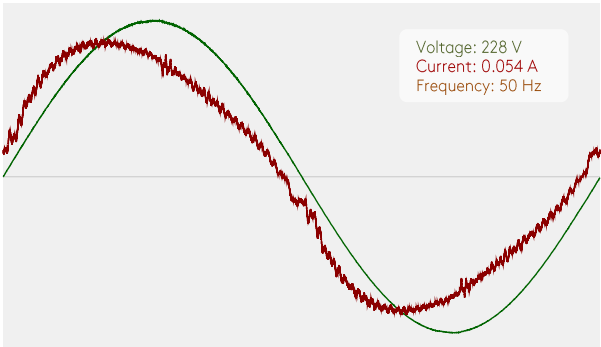


COLOR DETAILS

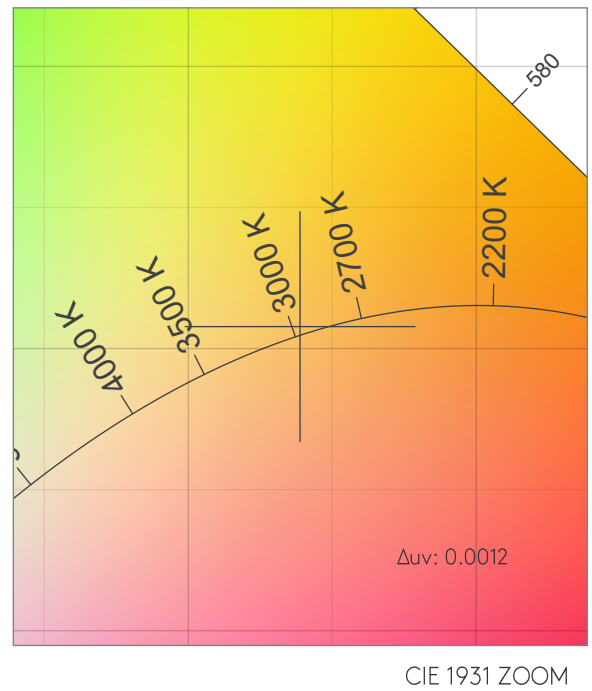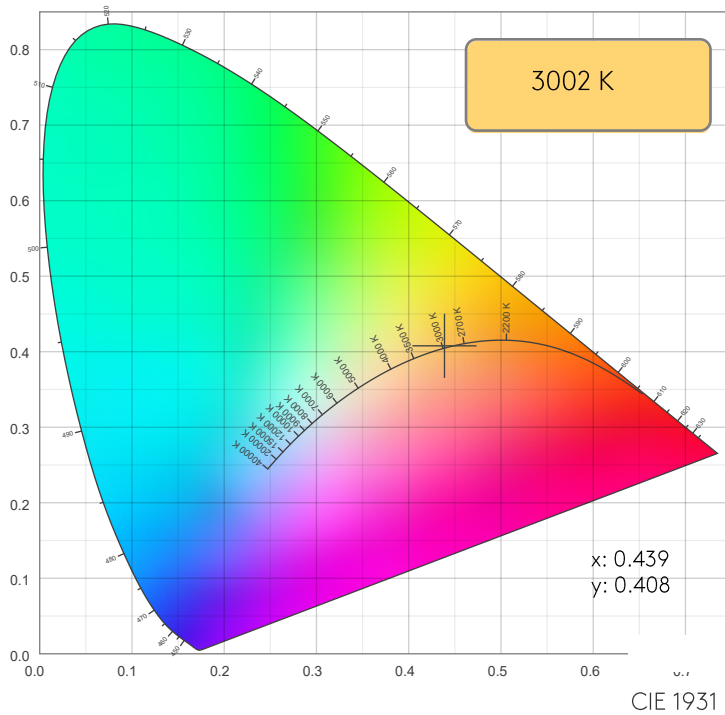

TM30: 93.1

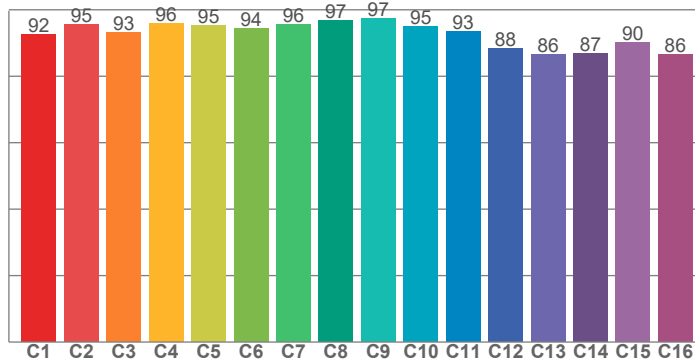

CRI: 95.7 (R1-R8)

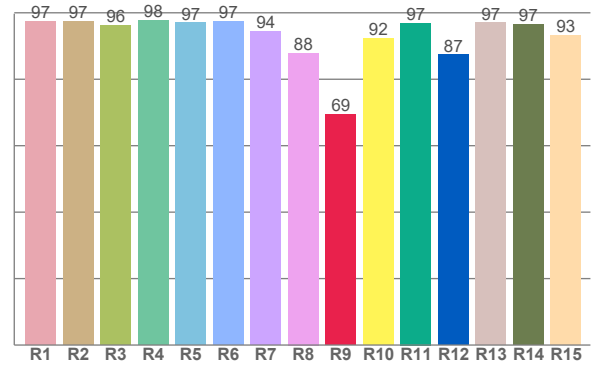

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97.5	97.3	96.3	97.8	97.0	97.4	94.4	87.9	69.3	92.3	96.9	87.3	97.0	96.5	93.1


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92.4	95.4	93.1	95.9	95.2	94.4	95.6	96.8	97.2	95.1	93.4	88.3	86.4	86.8	90.0	86.5

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
88.1	93.2	92.3	94.3	95.4	93.7	94.4	96.5	98.0	96.1	95.9	96.2	96.5	90.7	89.0

CQS: 93.2

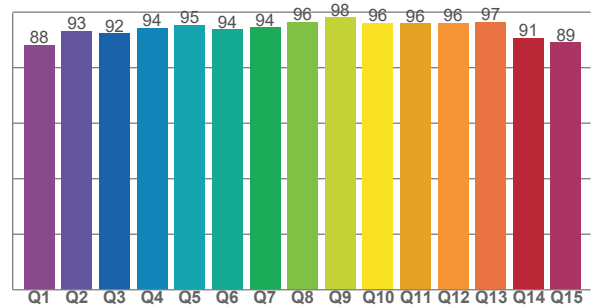

COLOR PARAMETERS

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3002 K	95.7	69.3	93.1	100.3	93.2	0.439	0.408	0.250	0.349	0.0012

TRIMLESS PRO ROUND FIXED IP65 - MATT







TM30 DETAILS

astro


Rf 93.1
Fidelity index Rf

Rg 100.3
Gammut index Rg

Hue Bin	Rf	Graphic shifts (%)	
		Chroma	Hue
1	92	-4%	-1%
2	95	-2%	1%
3	93	-1%	3%
4	96	-1%	1%
5	95	1%	3%
6	94	3%	2%
7	96	0%	-1%
8	97	2%	0%
9	97	0%	0%
10	95	0%	2%
11	93	1%	4%
12	88	5%	-3%
13	86	3%	-10%
14	87	3%	-10%
15	90	-1%	-6%
16	86	-3%	-10%

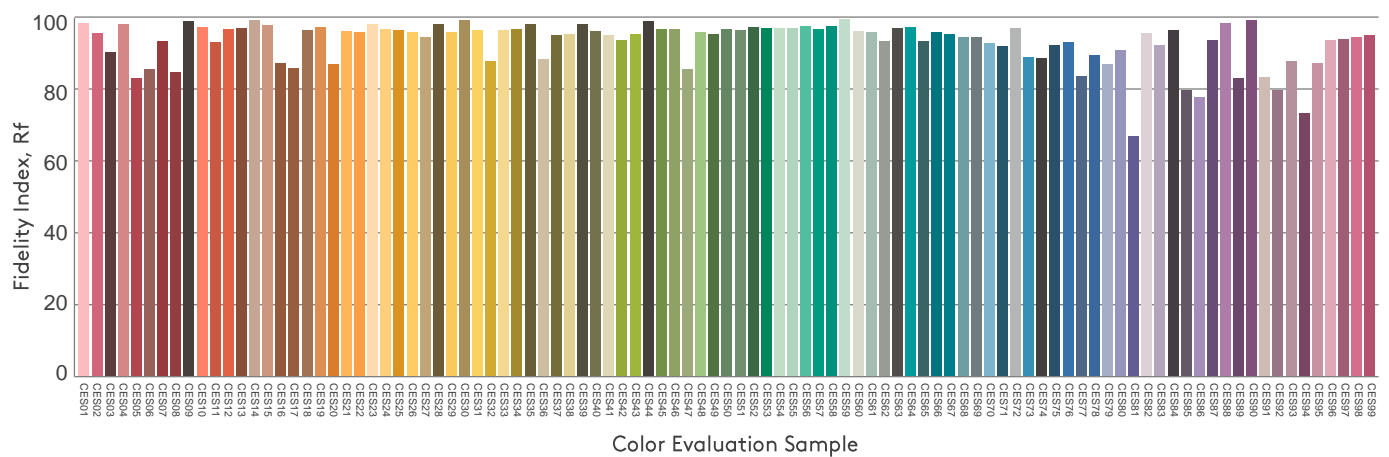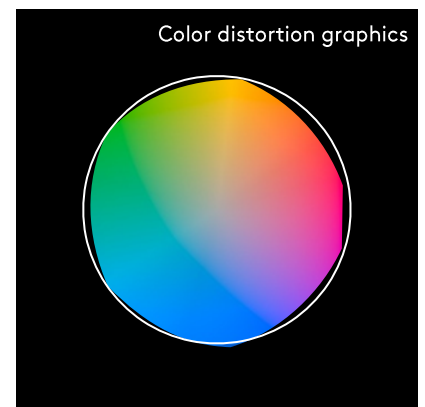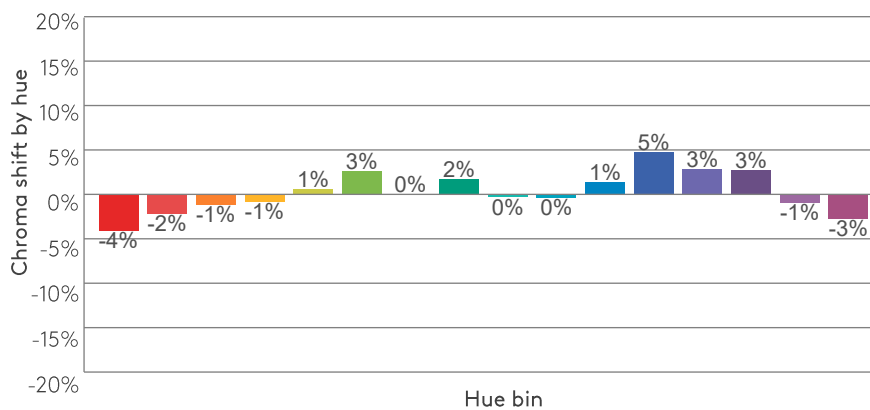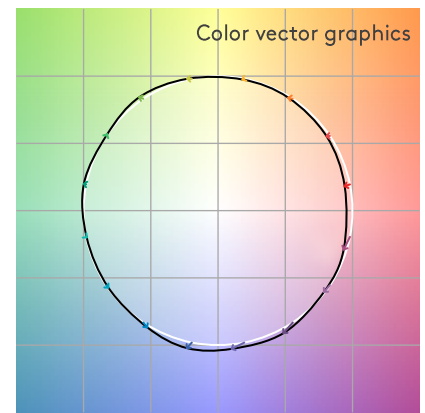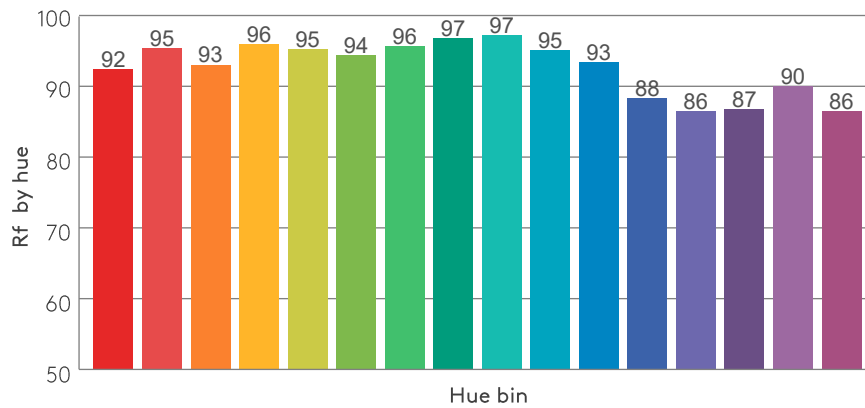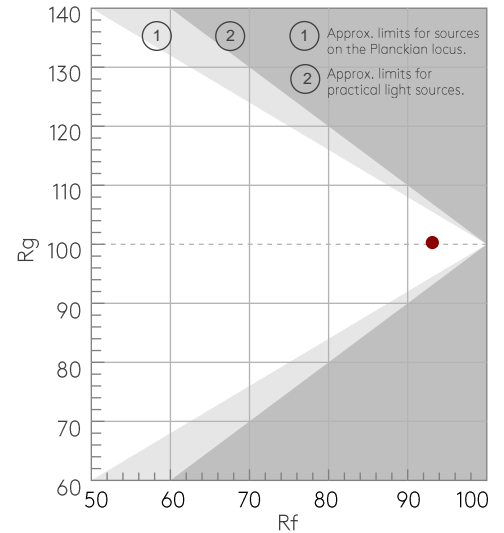

BEAM DETAILS

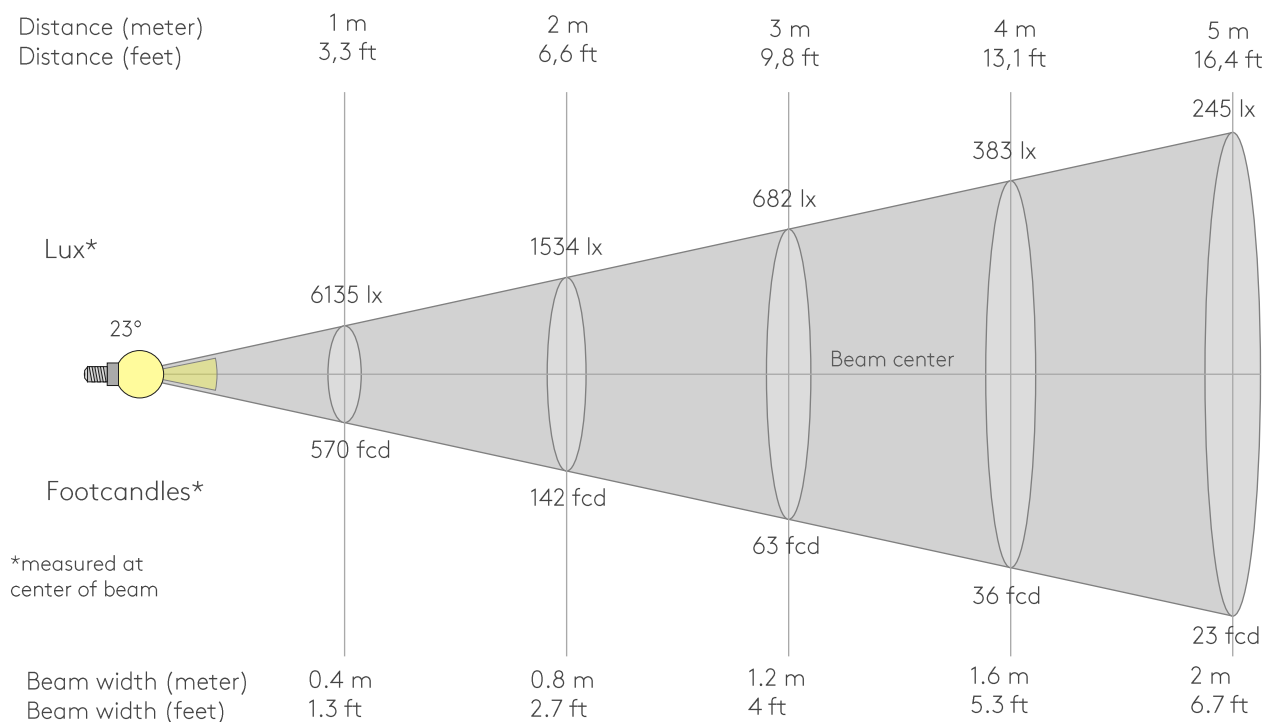

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
6135lx	1534lx	682lx	383lx	245lx	170lx	125lx	96lx	76lx	61lx	51lx	43lx	36lx	31lx	27lx	24lx	21lx	19lx	17lx	15lx
569.9fcd	142.5fcd	63.3fcd	35.6fcd	22.8fcd	15.8fcd	11.6fcd	8.9fcd	7fcd	5.7fcd	4.7fcd	4fcd	3.4fcd	2.9fcd	2.5fcd	2.2fcd	2fcd	1.8fcd	1.6fcd	1.4fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
6135	6030	5709	5169	4450	3651	2868	2165	1568	1105	781	563	407	294	209	141	85	49	34	25
100%	98%	93%	84%	73%	60%	47%	35%	26%	18%	13%	9%	7%	5%	3%	2%	1%	1%	1%	0%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
6135	6030	5709	5169	4450	3651	2868	2165	1568	1105	781	563	407	294	209	141	85	49	34	25
100%	98%	93%	84%	73%	60%	47%	35%	26%	18%	13%	9%	7%	5%	3%	2%	1%	1%	1%	0%

Intensities in 180° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
6135	6030	5709	5169	4450	3651	2868	2165	1568	1105	781	563	407	294	209	141	85	49	34	25
100%	98%	93%	84%	73%	60%	47%	35%	26%	18%	13%	9%	7%	5%	3%	2%	1%	1%	1%	0%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
6135	6030	5709	5169	4450	3651	2868	2165	1568	1105	781	563	407	294	209	141	85	49	34	25
100%	98%	93%	84%	73%	60%	47%	35%	26%	18%	13%	9%	7%	5%	3%	2%	1%	1%	1%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
23°	42.9°	59.2°	99.1%	98.5%


ISO CANDELA DIAGRAM

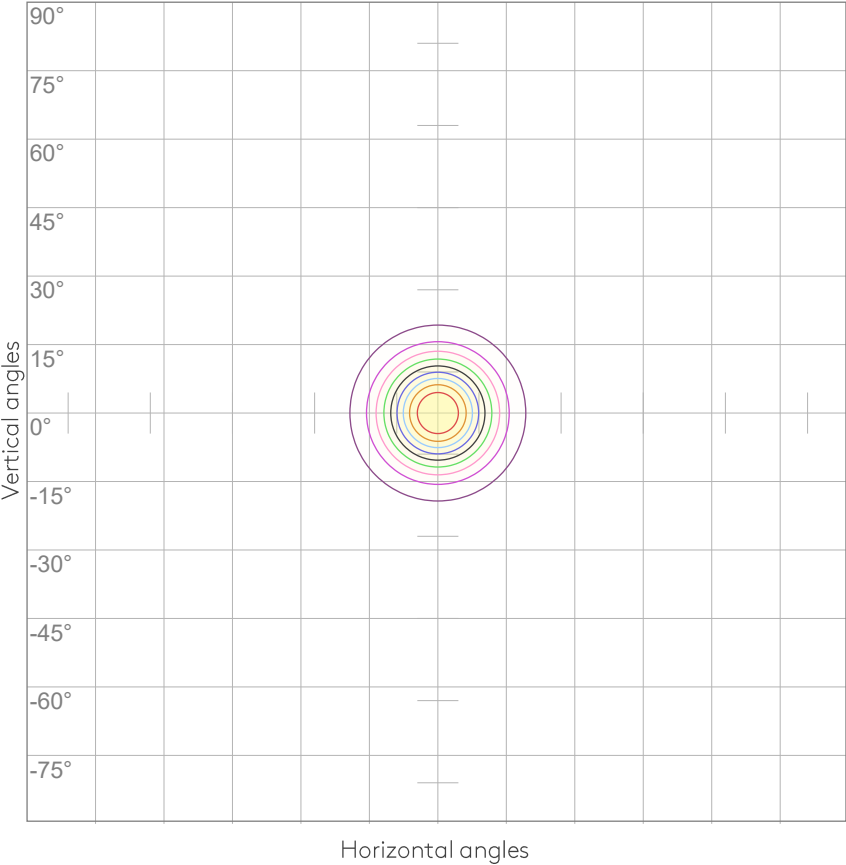

10%	613 cd
20%	1227 cd
30%	1840 cd
40%	2454 cd
50%	3067 cd
60%	3681 cd
70%	4294 cd
80%	4908 cd
90%	5521 cd

Conditions:
Number of c-planes: 8
Candela at center: 6135 cd

ISO LUX DIAGRAM

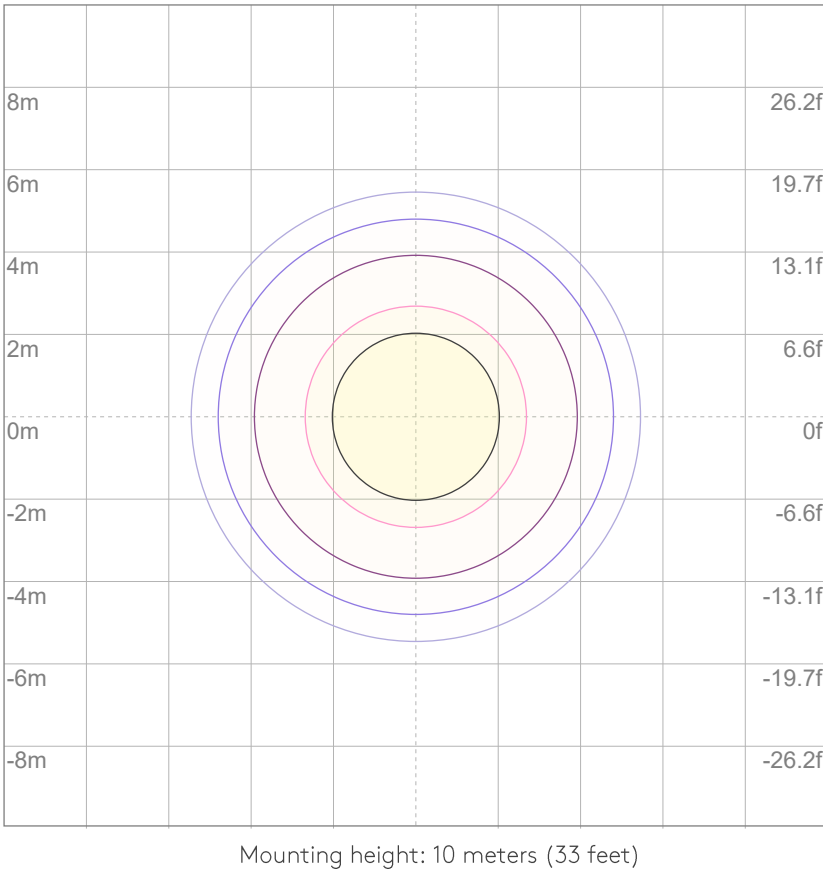

3%	1.84 lx
5%	3.07 lx
10%	6.13 lx
30%	18.4 lx
50%	{LUX_10M50} lx

Conditions:
Number of c-planes: 8
Lux at center: 61.3 lx

Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.

UGR

GLARE EVALUATION ACCORDING TO UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	10.9	11.3	11.0	11.5	11.7	10.9	11.3	11.0	11.5	11.7
	3H	11.4	11.9	11.8	12.1	12.3	11.4	11.9	11.8	12.1	12.3
	4H	11.9	12.4	12.3	12.6	12.9	11.9	12.4	12.3	12.6	12.9
	6H	12.4	12.9	12.7	13.2	13.5	12.4	12.9	12.7	13.2	13.5
	8H	12.6	13.1	13.0	13.4	13.8	12.6	13.1	13.0	13.4	13.8
	12H	12.8	13.2	13.1	13.5	13.9	12.8	13.2	13.1	13.5	13.9
4H	2H	10.9	11.4	11.3	11.6	11.9	10.9	11.4	11.3	11.6	11.9
	3H	11.8	12.2	12.2	12.6	13.0	11.8	12.2	12.2	12.6	13.0
	4H	12.4	12.8	12.9	13.3	13.8	12.4	12.8	12.9	13.3	13.8
	6H	13.1	13.6	13.6	13.9	14.3	13.1	13.6	13.6	13.9	14.3
	8H	13.4	13.8	13.9	14.2	14.5	13.4	13.8	13.9	14.2	14.5
	12H	13.6	13.9	14.1	14.3	14.8	13.6	13.9	14.1	14.3	14.8
8H	4H	12.7	13.1	13.2	13.4	13.8	12.7	13.1	13.2	13.4	13.8
	6H	13.6	13.9	14.1	14.3	14.9	13.6	13.9	14.1	14.3	14.9
	8H	14.0	14.2	14.6	14.8	15.4	14.0	14.2	14.6	14.8	15.4
	12H	14.3	14.5	14.9	15.0	15.6	14.3	14.5	14.9	15.0	15.6
12H	4H	12.7	13.0	13.2	13.4	13.9	12.7	13.0	13.2	13.4	13.9
	6H	13.7	13.9	14.2	14.5	15.1	13.7	13.9	14.2	14.5	15.1
	8H	14.1	14.3	14.7	14.8	15.4	14.1	14.3	14.7	14.8	15.4
Variation of the observer position for the luminaire distance S											
S = 1.0H		2.2 / -0.7					2.2 / -0.7				
S = 1.5H		4.1 / -0.9					4.1 / -0.9				
S = 2.0H		5.7 / -1.0					5.7 / -1.0				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1199 lm total luminous flux											

COEFFICIENTS OF UTILIZATION

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96
2	111	108	105	102	109	106	103	101	103	101	99	100	98	97	97	96	95	93
3	108	103	100	97	106	102	99	96	99	97	95	97	95	93	95	93	92	90
4	105	99	95	92	103	98	95	92	96	93	91	94	92	90	93	91	89	88
5	102	96	92	89	100	95	91	88	93	90	88	92	89	87	90	88	86	85
6	99	93	89	86	98	92	88	85	91	87	85	89	87	84	88	86	84	83
7	96	90	86	83	95	89	85	83	88	85	82	87	84	82	86	84	82	81
8	94	87	83	81	93	87	83	80	86	82	80	85	82	80	84	81	79	78
9	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	79	77	77
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	80	78	76	75

LAMPS (number of lamps)

LUMINAIRE BUDGETARY DIAGRAM

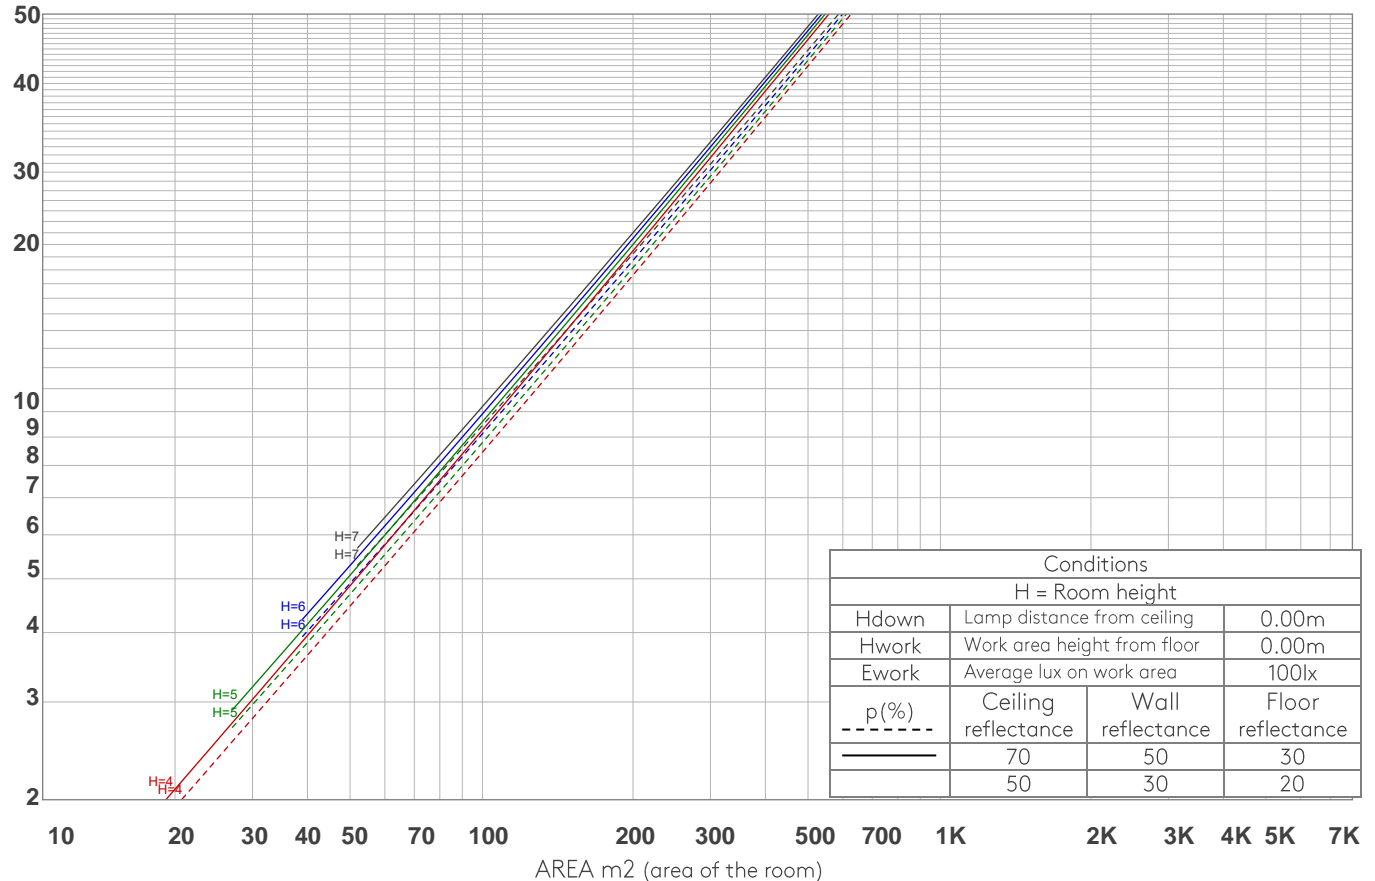

ZONAL LUMEN SUMMARY

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
462 lm	515 lm	168 lm	32.2 lm	7.46 lm	4.76 lm	3.63 lm	2.77 lm	1.04 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.190 lm	0.171 lm	0.174 lm	0.187 lm	0.288 lm	0.517 lm	0.714 lm	0.549 lm	0.127 lm

FLICKER

FLICKER CURVE (COMPLETE SAMPLED)



FLICKER FRAME (FRAME OF ONE FLICKER)



FLICKER FFT (FREQUENCY SCOPE OF FLICKER)



FLICKER RESULTS:

Flicker frequency:	n/a Hz
Flicker index:	n/a
Flicker percentage:	n/a %
SVM: (Visual flicker)	n/a

FLICKER CONDITIONS:

Sample rate:	n/a samples/second
--------------	--------------------