

Copyright © 2026




Copyright © 2026

OVERVIEW




- Linear suspended pendant in 12–48" lengths
  - Extruded brass, aluminum, and hardwood finishes radiating from a central channel
  - Dual linear arrays provide optional independent direct and indirect illumination
  - 24 VDC output Class 2 constant voltage power supply
  - 120–277 VAC input voltage
  - Dimming options: Forward Phase (TRIAC), Reverse Phase (ELV), or 0–10 V
  - Field-adjustable aircraft cables with clear-jacketed co-axial silver cord
  - Adjustable suspension length up to 115"
  - Direct-mount to ceiling
- 
- CRI 95+
  - R9 90+
  - 84 LM/W delivered efficacy
  - 600 LM per linear foot (maximum)
  - Faceted acrylic lens with 90° beam spread



Example:  
**JPR-AXIS-AXST-XXX-36-XX-XX**  
 36" nominal


**DMR/DMP/DMT 5" Canopy**  
 (can be replaced with **DML/DMC**)

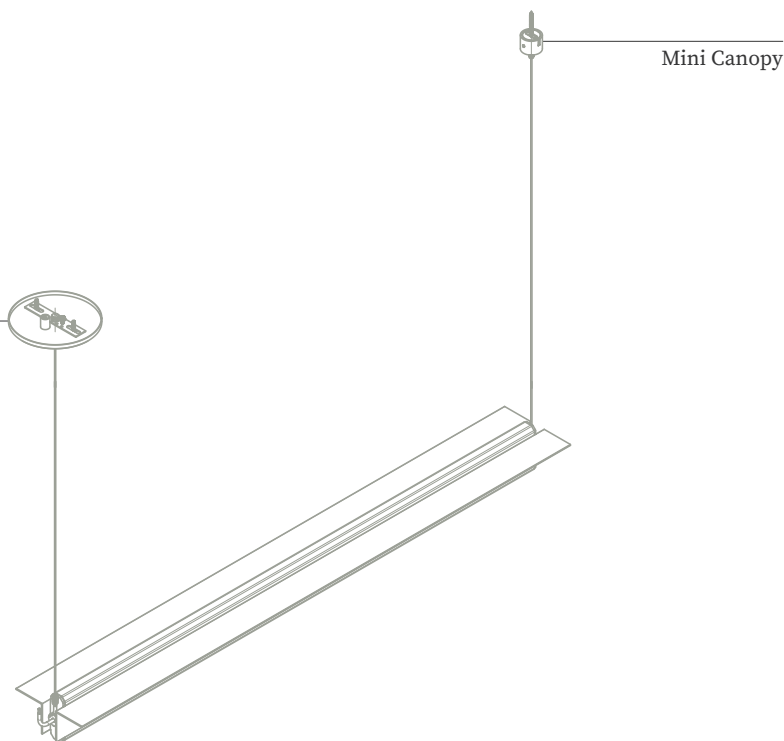

Maximum cable length is 114 in | 2896 mm.




SPECIFICATION BUILDER




1. Mounting	2. Pendant Length / Wattage	3. CCT	4. Finish
<b>DMR</b> 5" Canopy Remote Power Supply not included	<b>12</b> 12" / 7 W <b>24</b> 24" / 14 W	<b>27</b> 2700 K <b>30</b> 3000 K	<b>01</b> Satin Brass <b>02</b> Black Oxide
<b>DMP</b> 5" Canopy Remote Power Supply included	<b>36</b> 36" / 22 W <b>48</b> 48" / 28 W	<b>35</b> 3500 K <b>40</b> 4000 K	<b>03</b> Satin Nickel <b>40</b> English Bronze <b>BW</b> Black Walnut <b>NA</b> Natural Ash <b>EB</b> Ebony
<b>DMT</b> 5" Canopy Direct-Indirect Remote Power Supply included	See p. 23 for mounting/spacing configurations and dimensions for various fixture lengths.		<b>30</b> Matte Pure White <b>32</b> Matte Black <b>33</b> Satin Aluminum <b>CU</b> Custom
<b>DML</b> Juniper Power Hub – White Power Supply included			
<b>DMC</b> Juniper Power Hub – Custom Power Supply included			

Stock finishes shown.  
 See [Finishes](#) for additional options.

POWER FEED OPTIONS

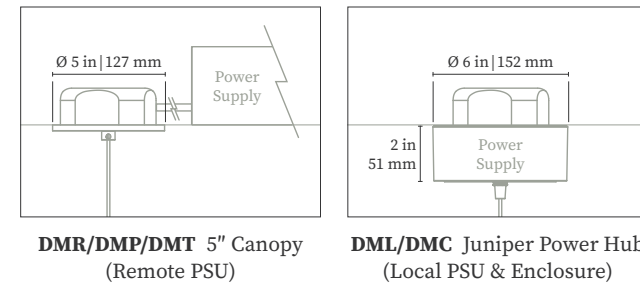

CABLE MOUNTING

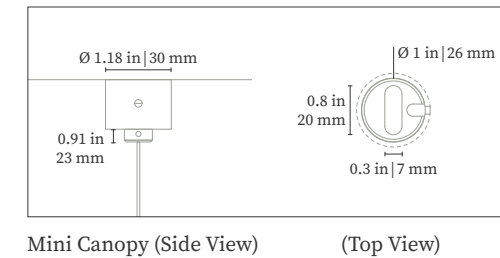

Juniper Power Hub mounting option includes a local power supply. See p. 32–33 for more details. Remote power supply must be specified separately for DMR mounting option (with 5" Canopy). For detailed photometrics, see [Photometric Data](#). IES files available.




SYSTEM LOGIC


Example:

**JPR-AXIS-AXST-XXX-36-XX-XX**

36" nominal

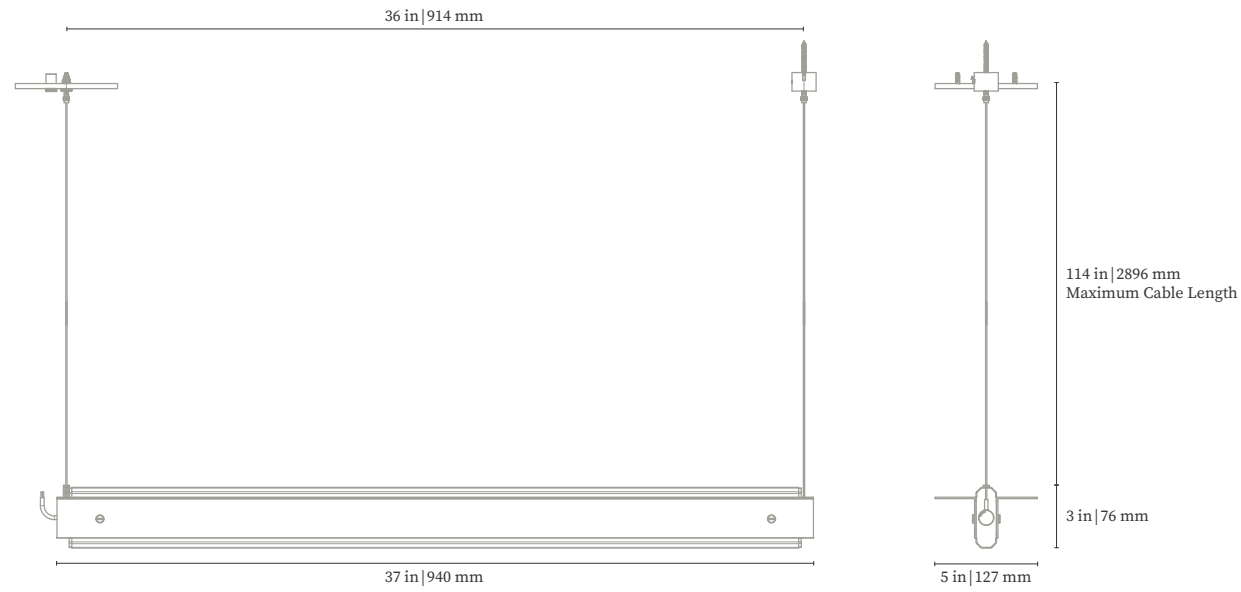

CONFIGURATIONS — DIAGRAMS

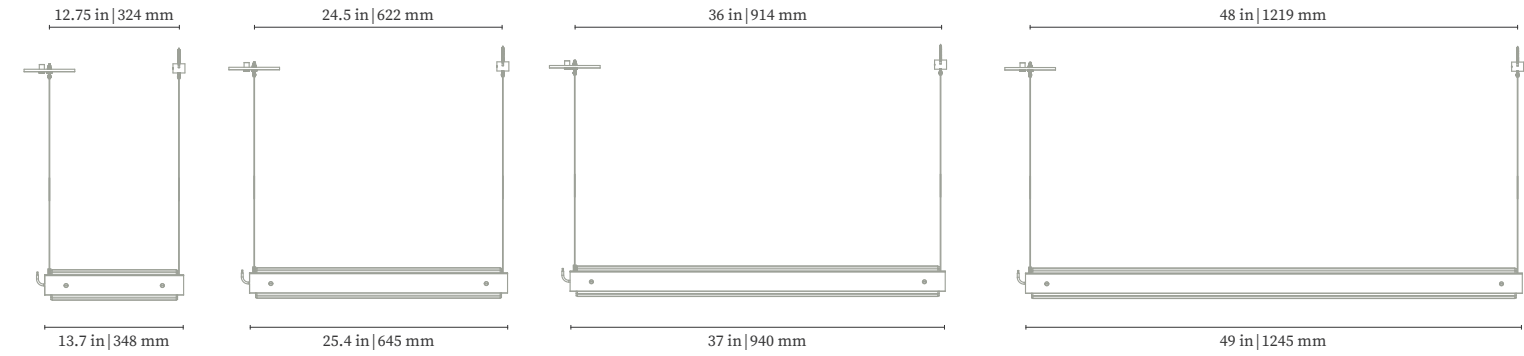

**12**

**24**

**36**

**48**

Length	Weight
<b>12</b>	4.3
<b>24</b>	7.2
<b>36</b>	10.5
<b>48</b>	13.6