


Black 41030



Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	D
Light source	HIGH POWER LED
Light source included	Yes
Luminous Flux (lm)	133
Color temperature (K)	3000K
Opening angle degrees	30
Photobiological risk	0
CRI	>80
Driver included	Yes
Switch type	On/Off
Structure material	Aluminium + Steel
Structure finish	

White FA41029

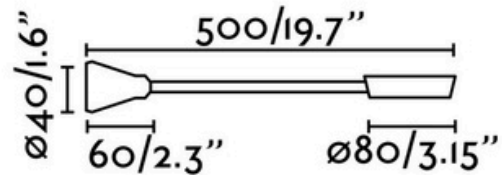

Chrome FA41028

