

DATA SHEET

CERA C 28 | 350 mA

GEORG
BECHTER
LICHT



Art. no.	Luminaire type	lm	mA	Watt
	CERA C 28 semi-open semi-recessed luminaire made of thin hand-cast porcelain with diffuse light and a directed core 2700 K incl. bayonet for installation in the DOT 28 SYSTEM passive cooling not combinable with Sinus, Drop, Intro or Konus mounting modules			
268110S	CERA C 28 S Ø 68 H 55	340*	350	4
268110M	CERA C 28 M Ø 96 H 75	380*	350	4
268110L	CERA C 28 L Ø 125 H 110	380*	350	4


Specification

Tender text

Semi-recessed luminaire made of 0.8 mm thin hand-cast semi-open porcelain; part of the DOT 28 System, which essentially enables flexible lighting solutions through the interplay of luminaire modules and mounting modules; tool-free and rapid installation as well as maintenance by means of a bayonet lock; luminaire accessories to be selected separately depending on the ceiling system and design requirements; the wafer-thin porcelain in its organic formal language impresses with a soft and diffuse light that, in combination with an opening on the underside, transitions into directed downlighting; the light distribution is a balanced combination of omnidirectional emission in the upper area and concentrated downward light in the core; milled aluminium heat sink with optimised thermal properties for passive cooling; operating mode: constant current 250 mA; external driver available separately; LED module power consumption: 3 W @ 250 mA; installation depth: min. 60 mm depending on mounting module; colour rendering: typ. RA 93; light colour: 2700 K; luminaire luminous flux: 255 lm @ 250 mA; colour tolerance (McAdam/SDCM): 3; energy efficiency class: A+; LED lifetime: L80/B50 > 55,000 h; protection rating IP 20; beam angle FWHM: 55°; porcelain body colour: white; maximum drive current 350 mA (340 lm, 4 W); not combinable with Sinus, Drop, Intro or Konus mounting modules

* Lumen values vary slightly due to the handmade production of the porcelain.

GEORG BECHTER LICHT | CERA C 28 | Art. no. 268110_ or equivalent

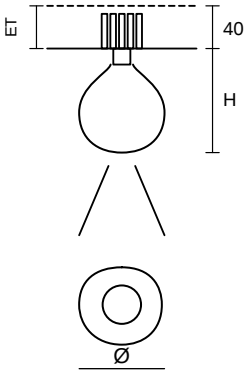

DATA SHEET

CERA 28 | 350 mA

GEORG
BECHTER
LICHT



Art. no.	Luminaire type	lm	mA	Watt
	CERA 28 closed semi-recessed luminaire made of thin hand-cast porcelain omnidirectional emission 2700 K incl. bayonet for installation in the DOT 28 SYSTEM suitable for wall installation passive cooling not combinable with Sinus, Drop, Intro or Konus mounting modules			
268105S	CERA 28 S Ø 68 H 55	300	350	4
268105M	CERA 28 M Ø 96 H 75	340	350	4
268105L	CERA 28 L Ø 125 H 110	340	350	4

Specification

Tender text

Semi-recessed luminaire made of 0.8 mm thin hand-cast closed porcelain | part of the DOT 28 System, which essentially enables flexible lighting solutions through the interplay of luminaire modules and mounting modules | tool-free and rapid installation as well as maintenance by means of a bayonet lock | luminaire accessories to be selected separately depending on the ceiling system and design requirements | the wafer-thin porcelain in its organic formal language impresses with a soft and diffuse light | light distribution omnidirectional | milled aluminium heat sink with optimised thermal properties for passive cooling | operating mode: constant current 250 mA | external driver available separately | LED module power consumption: 3 W @ 250 mA | installation depth: min. 60 mm depending on mounting module | colour rendering: typ. RA 93 | luminaire luminous flux: 220 lm @ 250 mA | colour tolerance (McAdam/SDCM): 3 | energy efficiency class: A+ | LED lifetime: L80/B50 > 55,000 h | protection rating IP 20 | porcelain body colour: white | light colour: 2700 K | maximum drive current 350 mA (295 lm, 4 W) | not combinable with Sinus, Drop, Intro or Konus mounting modules

GEORG BECHTER LICHT | CERA 28 | Art. no. 268105_ or equivalent

