




Art. no.	Luminaire type	lm	mA	Watt
317106	DOT SLIM DUO Recessed module with two light points for solid or dry construction, with horizontal cooling surface for minimal installation depths incl. 0–6 mm adjustable plaster edge and protective cap passive cooling excl. light source installation depth 25 mm in solid construction or 40 mm in dry construction	1220	700	17

Specification **Tender specification**

Recessed module with two light points for solid or dry construction with adjustable plaster edge; part of a system distinguished by the smallest possible installation depth at the highest possible lumen output; for installation in a concrete-ceiling recess ET 25 mm or suspended plasterboard ceilings ET 40 mm; observe passive cooling depending on the installation situation; installed from the front and without a special substructure; after installation the module is plastered/filled and painted over on the visible surface; what remains are two 28 mm ceiling-flush openings into which replaceable LED light sources can be fitted; dimensions: L 220 mm, W 140 mm, H 25 mm; light-point centre spacing 74 mm; installation depth: min. 25 mm in solid construction or 40 mm in dry construction; UGR <19 (at 25°/35°) at 700 mA drive current, UGR <19 (at 55°) at 600 mA drive current;

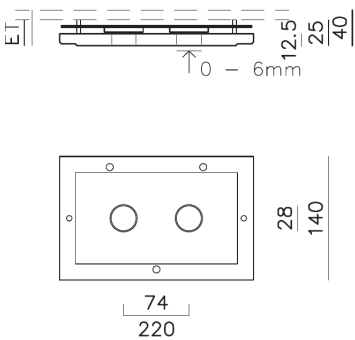

GEORG BECHTER LICHT | DOT SLIM DUO | Art. no. 317106 or equivalent
Formwork board for solid construction Art. no.: 317199
Compatible light sources Art. no.: 3175__E / 3175__A