


# TECHNICAL DATA SHEET

## 200CENT GENERATION 2 TRIMLESS ADJUSTABLE IP54

BATHROOM



Adjustable 0° - 25°

Cut out 114x134 mm

Recessed Depth - 100 mm

Material: CALCYT® plaster

Reflector Finish : White

200 Cent 250 lm		
LED 250 LM - 2,9 W - 2 step MacAdam Luminaire delivered lumens : 192 LM - CRI 92 - R9 = 72 - Rf = 93 - Rg = 100,5 - Requires remote LED driver - 700mA Automatic polarity correction		
Beam Angle	2700k	3000k
12°	BR253027921	BR253027821
18°	BR253027931	BR253027831
32°	BR253027941	BR253027841

200 Cent 500lm		
LED 500 LM - 4,7 W - 2 step MacAdam Luminaire delivered lumens : 378 LM- CRI 95 - R9 = 95 - Rf = 90 - Rg = 104. - Requires remote LED driver - 700mA Automatic polarity correction		
Beam Angle	2700k	3000k
18°	BR253028921	BR253028821
24°	BR253028931	BR253028831
32°	BR253028941	BR253028841
44°	BR253028951	BR253028851

200 Cent 750lm		
LED 750 LM - 7,4 W - 2 step MacAdam Luminaire delivered lumens : 540 LM - CRI 92 - R9 = 72 - Rf = 93 - Rg = 100,5 - Requires remote LED driver - 700mA Automatic polarity correction		
Beam Angle	2700k	
28°	BR253029931	BR253029831
32°	BR253029941	BR253029841
38°	BR253029951	BR253029851


200 Cent 1000lm		
LED 1000 LM - 8,9 W - 2 step MacAdam Luminaire delivered lumens : 760 LM - F CRI 91 - R9 = 66 - Rf = 90 - Rg = 101,5 - Requires remote LED driver - 700mA Automatic polarity correction		
Beam Angle	2700k	3000k
32°	BR253026931	BR253026831
36°	BR253026941	BR253026841
42°	BR253026951	BR253026851

## INSTALLATION KIT

STANDARD (included)  
installation system for ceiling 9-12-15 mm

BR20099025  
installation system for gypsum ceiling 25 mm


BR20099030  
installation system for gypsum ceiling 30 mm

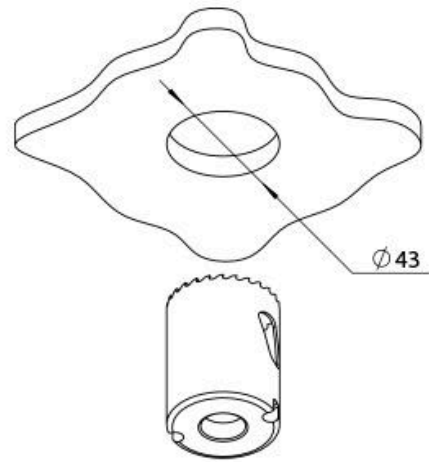


## OPTIONAL COLOURS ON REQUEST



Black




Sand



Silver Bronze



Bronze



Brass

