Edge

Edge is a multifunctional solution designed for above the workspace.
Edge comes in a spotlight. An contraplug and as acoustic version in two sizes. Cluster together to create a statemen installation

Edge spot Edge XL spot Edge acoustic Edge XL acoustic Edge XL plug Edge floor light

Edge Spot

Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B
Produced in The Netherlands

Fixture:
2m black textile cable
Black ceiling cap

Lighting properties:

GU10 MR11
Lightbulb 3000K included

IP20

Acoustic properties:

High absorption value of aw 0,85

Diffusion by design

specifications:
GU10 MR 11 (35mm) Included

LED power:	3,5W
Connection voltage:	220-240V AC
Luminous Flux:	250lm
Life time:	50.000h
CCT Color temperature:	3000K
Control | Dimmable:	Trailing Edge

Total weight gross | net: 1,9kg | 1,6kg
Parcel size: 110x110x500mm

Mounting:

Dimensions:

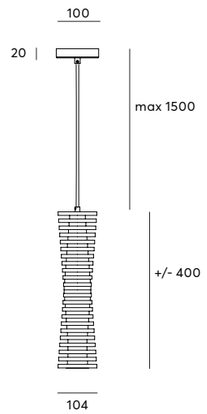

Edge XL Spot

Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B
Produced in The Netherlands

Fixture:
2m black textile cable
Black ceiling cap

Lighting properties:

GU10
Lightbulb 3000K Included

IP20

Acoustic properties:

High absorption value of aw 0,85

Diffusion by design

specifications:
GU10 (50mm) Included

LED power:	5W
Connection voltage:	220-240V AC
Luminous Flux:	450lm
Life time:	50.000h
CCT Color temperature:	3000K
Control | Dimmable:	Trailing Edge

Total weight gross | net: 2,9kg | 2,1kg
Parcel size: 150x150x600mm

Mounting:

Dimensions:

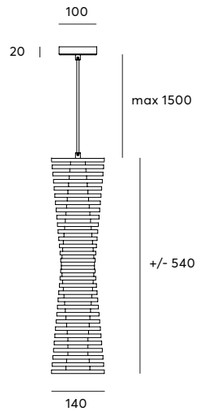

Edge Acoustic

Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B
Produced in The Netherlands

Fixture:
1,5m black textile cable
Black ceiling cap

Acoustic properties:

High absorption
value of aw 0,85

Diffusion by design

Total weight gross | net: 1,9kg | 1,6kg
Parcel size: 110x110x500mm

Mounting:

Dimensions:

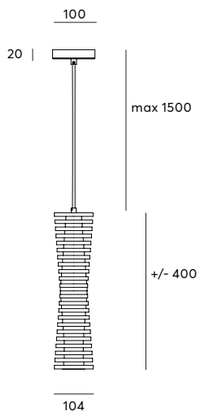

Edge XL Acoustic

Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B
Produced in The Netherlands

Fixture:
1,5m black textile cable
Black ceiling cap

Acoustic properties:

High absorption
value of aw 0,85

Diffusion by design

Total weight gross | net: 2,1kg | 1,8kg
Parcel size: 150x150x600mm

Mounting:

Dimensions:

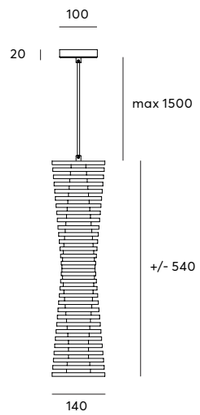

Edge XL Plug

Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B
Produced in The Netherlands

Fixture:
2m black textile cable
Black ceiling cap

Lighting properties:

GU10
Lightbulb excluded

IP20

Acoustic properties:

High absorption value of aw 0,85

Diffusion by design

Specifications:

Type	3 pronge power plug
Max Ampere:	6A
Connection voltage:	220-240V AC

Total weight gross | net: 2,9kg | 2,1kg
Parcel size: 150x1050x600mm

Mounting:

Dimensions:

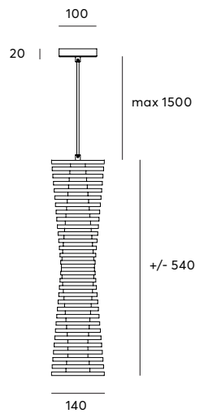

Top Colors:

13_Black, 03_Charcoal, 36_Dim Grey, 11_Fog Grey, 07_Ghost White, 19_Midnight, 26_Ocean, 30_Cool Grey, **41_Mint Pastel**

17_Forest, 40_Faded Jade, 06_Olive, 39_Warm Grey, 04_Bisque, 35_Ochre, 45_Chilli, 09_Lavender, 31_Rosé

Bottom Colors:

11_Fog Grey, 07_Ghost White, 30_Cool Grey, 04_Bisque

* We recommend to pick a different Felt color for top and bottom

Acoustic specifications:



Acoustic PET Felt

Fixture

The product is designed with multiple layers of sound absorbing PET Felt.
Due to this layered effect, the soundwaves are optimally absorbed by the fixture.

Suspended 9 mm PET Felt tested to ISO 354:2003.

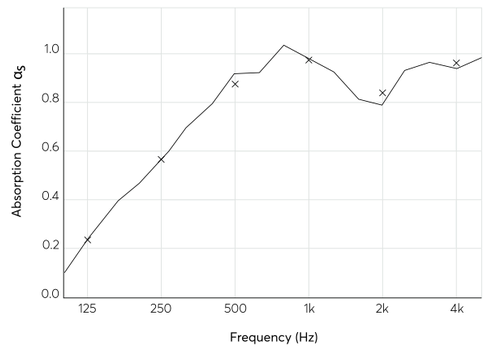

1/3 oct.	0.10 0.23 0.38	0.46 0.56 0.69	0.79 0.92 0.92	1.03 0.98 0.93	0.81 0.79 0.93	0.96 0.94 0.98
1/1 oct.	0.24	0.57	0.88	0.98	0.84	0.96

aw (ISO 11654) = 0,85 (H)
SAA (ASTM - C423) = 0,82

Edge Floor Light

Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B
Produced in The Netherlands

Fixture:
2m black textile cable with floor dimmer and europlug
Metal base plate and construction

Lighting properties:

- Integrated LED
  25W | 2600lm
- Dimmable
  Floor dimmer included
- CCT 3000K | 4000K
- IP20

Acoustic properties:

- 5,54 m² of acoustic absorption material of aw 0,45
- Diffusion by design

Dimensions:

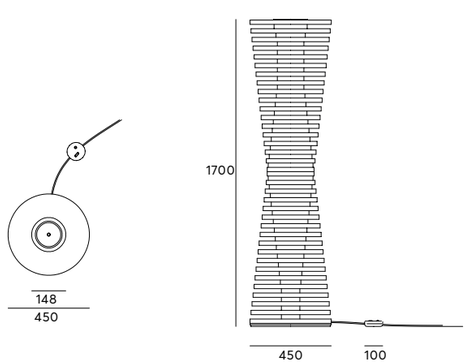

Total weight gross | net: 27,2kg | 25,7kg
Parcel size: 480x480x1750mm

Mounting: Free standing with Europlug

Top Colors:

11_Fog Grey | 26_Ocean | 04_Bisque | 06_Olive | 39_Warm Grey

Bottom Colors:

11_Fog Grey | 26_Ocean | 04_Bisque | 06_Olive | 39_Warm Grey

* We recommend to pick a different Felt color for top and bottom

Light source specifications:

LED power:	25W
Connection voltage:	220-240V AC
Luminous Flux: 3000K/4000K	2600lm / 2800lm
Life time	50.000h
Driver:	Included | Integrated
Control | Dimmable:	Trailing Edge (floor dimmer included)
Power factor: 3000K/4000K	104lm/W 112lm/W
Beam of light:	60°
CCT Color temperature:	3000K|4000K
CRI:	Ra >80
UGR:	<16
Operating temperature:	-20 ~ +45

Photometrics:
Lumen intensity distribution



Acoustic specifications:

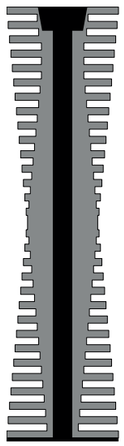

Acoustic PET Felt
Fixture

Calculated acoustic surface area: 5,54 m²

Suspended 24 mm PET Felt tested to ISO 354:2003.

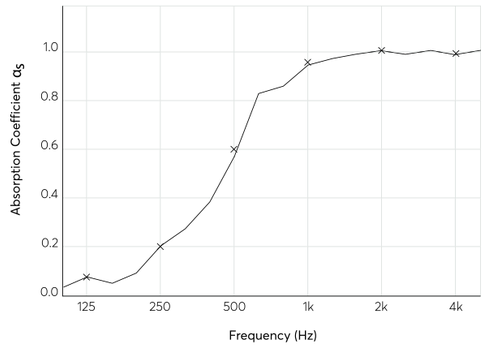

1/3 oct.	0.04 0.08 0.06	0.09 0.21 0.28	0.39 0.56 0.81	0.85 0.92 0.95	0.97 0.98 0.97	0.97 0.96 0.98
1/1 oct.	0.08	0.21	0.56	0.92	0.98	0.96

aw (ISO 11654) = 0,65
SAA (ASTM - C423) = 0,65