
THREE-CIRCUIT TRACK SPOTLIGHT

Fost Track ø40

FARO
Three-circuit track system



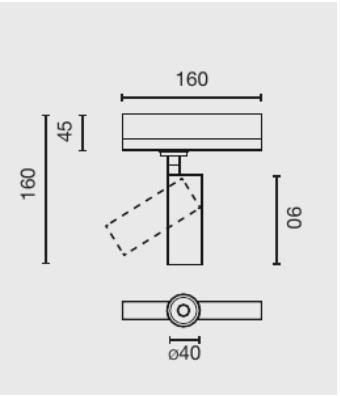

Dimensions in mm

The smallest Fost: a 40 mm precision spotlight in aluminium with the driver built into the track adapter, so there is no separate gear box beside the head. Discreet enough for lower ceilings, joinery, shelving and close-range accents.

SPECIFICATIONS

Mounting	Faro three-circuit (3-phase) track
Voltage	220–240 V, 50/60 Hz
Power	7 W
Light source	COB LED, driver in the track adapter
Luminous flux	553–672 lm (see table)
CRI	90
Colour temperature	2700 K, 3000 K or 4000 K
Colour consistency	MacAdam 2–3 step
Beam angle	18°, 24° or 36°
Adjustment	Rotates 355°, tilts 90°
Rated life	50,000 h (L70/B10)
Protection	IP20, class II, for indoor use
Materials	Aluminium body
Finish	Matt white or matt black
Control	On/Off or DALI
Size	ø40 mm head, 160 mm overall height, 160 mm adapter

LIGHT OUTPUT (CRI 90)

	18°	24°	36°
2700 K	632 lm	553 lm	586 lm
3000 K	652 lm	570 lm	604 lm
4000 K	672 lm	587 lm	622 lm

Luminous flux from Faro's catalogue.

ACCESSORIES

White ring ø40 (FA011500099)

Bronze ring ø40 (FA011500098)

Sold separately.

CONTROL

On/Off	Switched, not dimmable
DALI	Needs Faro DALI track and connectors

Each light's adapter selects one of the track's three circuits.

ORDERING CODES

Fost Track ø40

FARO
36 variants

Every variant, grouped by control and finish. Codes are our stock codes (Faro reference with an FA prefix).

Code	Colour	Beam	Output
On/Off · Matt Black			
FA011592712	2700K	18°	632 lm
FA011592722	2700K	24°	553 lm
FA011592732	2700K	36°	586 lm
FA011593012	3000K	18°	652 lm
FA011593022	3000K	24°	570 lm
FA011593032	3000K	36°	604 lm
FA011594012	4000K	18°	672 lm
FA011594022	4000K	24°	587 lm
FA011594032	4000K	36°	622 lm
On/Off · Matt White			
FA011592711	2700K	18°	632 lm
FA011592721	2700K	24°	553 lm
FA011592731	2700K	36°	586 lm
FA011593011	3000K	18°	652 lm
FA011593021	3000K	24°	570 lm
FA011593031	3000K	36°	604 lm
FA011594011	4000K	18°	672 lm
FA011594021	4000K	24°	587 lm
FA011594031	4000K	36°	622 lm

Code	Colour	Beam	Output
DALI · Matt Black			
FA011592712D	2700K	18°	632 lm
FA011592722D	2700K	24°	553 lm
FA011592732D	2700K	36°	586 lm
FA011593012D	3000K	18°	652 lm
FA011593022D	3000K	24°	570 lm
FA011593032D	3000K	36°	604 lm
FA011594012D	4000K	18°	672 lm
FA011594022D	4000K	24°	587 lm
FA011594032D	4000K	36°	622 lm
DALI · Matt White			
FA011592711D	2700K	18°	632 lm
FA011592721D	2700K	24°	553 lm
FA011592731D	2700K	36°	586 lm
FA011593011D	3000K	18°	652 lm
FA011593021D	3000K	24°	570 lm
FA011593031D	3000K	36°	604 lm
FA011594011D	4000K	18°	672 lm
FA011594021D	4000K	24°	587 lm
FA011594031D	4000K	36°	622 lm