
THREE-CIRCUIT TRACK SPOTLIGHT

Fost Track ø64

FARO

Three-circuit track system



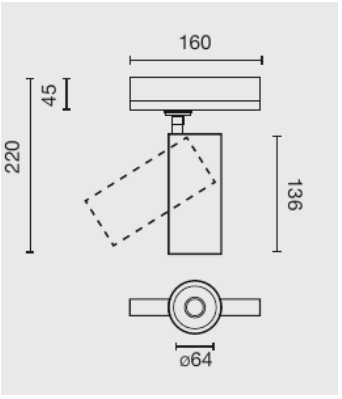

Dimensions in mm

A powerful 64 mm Fost spotlight for retail, galleries and higher ceilings, with the driver built into the track adapter and a wide choice of beams and accessories.

SPECIFICATIONS

Mounting	Faro three-circuit (3-phase) track
Voltage	220–240 V, 50/60 Hz
Power	28 W
Light source	COB LED, driver in the track adapter
Luminous flux	2270–3172 lm (see table)
CRI	90
Colour temperature	2700 K, 3000 K or 4000 K
Colour consistency	MacAdam 2–3 step
Beam angle	17°, 25°, 35° or 60°
Adjustment	Rotates 355°, tilts 90°
Rated life	50,000 h (L80/B10)
Protection	IP20, class II, for indoor use
Materials	Aluminium body
Finish	Matt white or matt black
Control	On/Off or TRIAC or DALI
Size	ø64 mm head, 220 mm overall height, 160 mm adapter

LIGHT OUTPUT (CRI 90)

	17°	25°	35°	60°
2700 K	2,982 lm	2,987 lm	2,732 lm	2,270 lm
3000 K	3,075 lm	3,080 lm	2,817 lm	2,341 lm
4000 K	3,167 lm	3,172 lm	2,902 lm	2,412 lm

Luminous flux from Faro's catalogue.

ACCESSORIES

White ring ø64 (FA011700099)
Copper ring ø64 (FA011700098)
Honeycomb ø64 (FA011700094)
Spread glass ø64 (FA011700097)
Striped glass ø64 (FA011700096)
Long snoot ø64 (FA011700095)

Sold separately.

CONTROL

On/Off	Switched, not dimmable
TRIAC	Phase-cut dimming on its circuit
DALI	Needs Faro DALI track and connectors

Each light's adapter selects one of the track's three circuits.

ORDERING CODES

Fost Track ø64

FARO
72 variants

Every variant, grouped by control and finish. Codes are our stock codes (Faro reference with an FA prefix).

Code	Colour	Beam	Output
On/Off · Matt Black			
FA011792712	2700K	17°	2,982 lm
FA011792722	2700K	25°	2,987 lm
FA011792732	2700K	35°	2,732 lm
FA011792762	2700K	60°	2,270 lm
FA011793012	3000K	17°	3,075 lm
FA011793022	3000K	25°	3,080 lm
FA011793032	3000K	35°	2,817 lm
FA011793062	3000K	60°	2,341 lm
FA011794012	4000K	17°	3,167 lm
FA011794022	4000K	25°	3,172 lm
FA011794032	4000K	35°	2,902 lm
FA011794062	4000K	60°	2,412 lm
On/Off · Matt White			
FA011792711	2700K	17°	2,982 lm
FA011792721	2700K	25°	2,987 lm
FA011792731	2700K	35°	2,732 lm
FA011792761	2700K	60°	2,270 lm
FA011793011	3000K	17°	3,075 lm
FA011793021	3000K	25°	3,080 lm
FA011793031	3000K	35°	2,817 lm
FA011793061	3000K	60°	2,341 lm
FA011794011	4000K	17°	3,167 lm
FA011794021	4000K	25°	3,172 lm
FA011794031	4000K	35°	2,902 lm
FA011794061	4000K	60°	2,412 lm
TRIAC · Matt Black			
FA011792712C	2700K	17°	2,982 lm
FA011792722C	2700K	25°	2,987 lm
FA011792732C	2700K	35°	2,732 lm
FA011792762C	2700K	60°	2,270 lm
FA011793012C	3000K	17°	3,075 lm
FA011793022C	3000K	25°	3,080 lm
FA011793032C	3000K	35°	2,817 lm
FA011793062C	3000K	60°	2,341 lm
FA011794012C	4000K	17°	3,167 lm
FA011794022C	4000K	25°	3,172 lm
FA011794032C	4000K	35°	2,902 lm
FA011794062C	4000K	60°	2,412 lm

Code	Colour	Beam	Output
TRIAC · Matt White			
FA011792711C	2700K	17°	2,982 lm
FA011792721C	2700K	25°	2,987 lm
FA011792731C	2700K	35°	2,732 lm
FA011792761C	2700K	60°	2,270 lm
FA011793011C	3000K	17°	3,075 lm
FA011793021C	3000K	25°	3,080 lm
FA011793031C	3000K	35°	2,817 lm
FA011793061C	3000K	60°	2,341 lm
FA011794011C	4000K	17°	3,167 lm
FA011794021C	4000K	25°	3,172 lm
FA011794031C	4000K	35°	2,902 lm
FA011794061C	4000K	60°	2,412 lm
DALI · Matt Black			
FA011792712D	2700K	17°	2,982 lm
FA011792722D	2700K	25°	2,987 lm
FA011792732D	2700K	35°	2,732 lm
FA011792762D	2700K	60°	2,270 lm
FA011793012D	3000K	17°	3,075 lm
FA011793022D	3000K	25°	3,080 lm
FA011793032D	3000K	35°	2,817 lm
FA011793062D	3000K	60°	2,341 lm
FA011794012D	4000K	17°	3,167 lm
FA011794022D	4000K	25°	3,172 lm
FA011794032D	4000K	35°	2,902 lm
FA011794062D	4000K	60°	2,412 lm
DALI · Matt White			
FA011792711D	2700K	17°	2,982 lm
FA011792721D	2700K	25°	2,987 lm
FA011792731D	2700K	35°	2,732 lm
FA011792761D	2700K	60°	2,270 lm
FA011793011D	3000K	17°	3,075 lm
FA011793021D	3000K	25°	3,080 lm
FA011793031D	3000K	35°	2,817 lm
FA011793061D	3000K	60°	2,341 lm
FA011794011D	4000K	17°	3,167 lm
FA011794021D	4000K	25°	3,172 lm
FA011794031D	4000K	35°	2,902 lm
FA011794061D	4000K	60°	2,412 lm