
THREE-CIRCUIT TRACK SPOTLIGHT

Fost Track ø70

FARO

Three-circuit track system



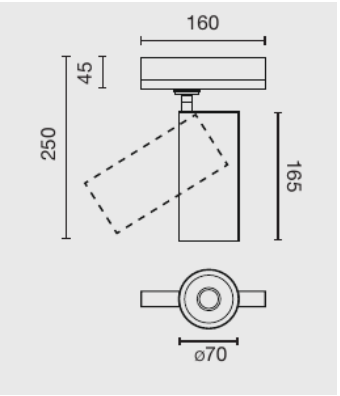

Dimensions in mm

The most powerful Fost, 70 mm across, for high ceilings, large shops and galleries. The driver is built into the track adapter.

SPECIFICATIONS

Mounting	Faro three-circuit (3-phase) track
Voltage	220–240 V, 50/60 Hz
Power	43 W
Light source	COB LED, driver in the track adapter
Luminous flux	3294–3640 lm (see table)
CRI	90
Colour temperature	2700 K, 3000 K or 4000 K
Colour consistency	MacAdam 2–3 step
Beam angle	18°, 24°, 36° or 60°
Adjustment	Rotates 355°, tilts 90°
Rated life	50,000 h (L70/B10)
Protection	IP20, class II, for indoor use
Materials	Aluminium body
Finish	Matt white or matt black
Control	On/Off or TRIAC or DALI
Size	ø70 mm head, 250 mm overall height, 160 mm adapter

LIGHT OUTPUT (CRI 90)

	18°	24°	36°	60°
2700 K	3,428 lm	3,400 lm	3,369 lm	3,294 lm
3000 K	3,534 lm	3,505 lm	3,473 lm	3,396 lm
4000 K	3,640 lm	3,610 lm	3,577 lm	3,498 lm

Luminous flux from Faro's catalogue.

ACCESSORIES

- White ring ø70 (FA011800099)
- Copper ring ø70 (FA011800098)
- Honeycomb ø70 (FA011800094)
- Spread glass ø70 (FA011800097)
- Striped glass ø70 (FA011800096)
- Long snoot ø70 (FA011800095)

Sold separately.

CONTROL

On/Off	Switched, not dimmable
TRIAC	Phase-cut dimming on its circuit
DALI	Needs Faro DALI track and connectors

Each light's adapter selects one of the track's three circuits.

ORDERING CODES

Fost Track ø70

FARO
72 variants

Every variant, grouped by control and finish. Codes are our stock codes (Faro reference with an FA prefix).

Code	Colour	Beam	Output
On/Off · Matt Black			
FA011892712	2700K	18°	3,428 lm
FA011892722	2700K	24°	3,400 lm
FA011892732	2700K	36°	3,369 lm
FA011892762	2700K	60°	3,294 lm
FA011893012	3000K	18°	3,534 lm
FA011893022	3000K	24°	3,505 lm
FA011893032	3000K	36°	3,473 lm
FA011893062	3000K	60°	3,396 lm
FA011894012	4000K	18°	3,640 lm
FA011894022	4000K	24°	3,610 lm
FA011894032	4000K	36°	3,577 lm
FA011894062	4000K	60°	3,498 lm
On/Off · Matt White			
FA011892711	2700K	18°	3,428 lm
FA011892721	2700K	24°	3,400 lm
FA011892731	2700K	36°	3,369 lm
FA011892761	2700K	60°	3,294 lm
FA011893011	3000K	18°	3,534 lm
FA011893021	3000K	24°	3,505 lm
FA011893031	3000K	36°	3,473 lm
FA011893061	3000K	60°	3,396 lm
FA011894011	4000K	18°	3,640 lm
FA011894021	4000K	24°	3,610 lm
FA011894031	4000K	36°	3,577 lm
FA011894061	4000K	60°	3,498 lm
TRIAC · Matt Black			
FA011892712C	2700K	18°	3,428 lm
FA011892722C	2700K	24°	3,400 lm
FA011892732C	2700K	36°	3,369 lm
FA011892762C	2700K	60°	3,294 lm
FA011893012C	3000K	18°	3,534 lm
FA011893022C	3000K	24°	3,505 lm
FA011893032C	3000K	36°	3,473 lm
FA011893062C	3000K	60°	3,396 lm
FA011894012C	4000K	18°	3,640 lm
FA011894022C	4000K	24°	3,610 lm
FA011894032C	4000K	36°	3,577 lm
FA011894062C	4000K	60°	3,498 lm

Code	Colour	Beam	Output
TRIAC · Matt White			
FA011892711C	2700K	18°	3,428 lm
FA011892721C	2700K	24°	3,400 lm
FA011892731C	2700K	36°	3,369 lm
FA011892761C	2700K	60°	3,294 lm
FA011893011C	3000K	18°	3,534 lm
FA011893021C	3000K	24°	3,505 lm
FA011893031C	3000K	36°	3,473 lm
FA011893061C	3000K	60°	3,396 lm
FA011894011C	4000K	18°	3,640 lm
FA011894021C	4000K	24°	3,610 lm
FA011894031C	4000K	36°	3,577 lm
FA011894061C	4000K	60°	3,498 lm
DALI · Matt Black			
FA011892712D	2700K	18°	3,428 lm
FA011892722D	2700K	24°	3,400 lm
FA011892732D	2700K	36°	3,369 lm
FA011892762D	2700K	60°	3,294 lm
FA011893012D	3000K	18°	3,534 lm
FA011893022D	3000K	24°	3,505 lm
FA011893032D	3000K	36°	3,473 lm
FA011893062D	3000K	60°	3,396 lm
FA011894012D	4000K	18°	3,640 lm
FA011894022D	4000K	24°	3,610 lm
FA011894032D	4000K	36°	3,577 lm
FA011894062D	4000K	60°	3,498 lm
DALI · Matt White			
FA011892711D	2700K	18°	3,428 lm
FA011892721D	2700K	24°	3,400 lm
FA011892731D	2700K	36°	3,369 lm
FA011892761D	2700K	60°	3,294 lm
FA011893011D	3000K	18°	3,534 lm
FA011893021D	3000K	24°	3,505 lm
FA011893031D	3000K	36°	3,473 lm
FA011893061D	3000K	60°	3,396 lm
FA011894011D	4000K	18°	3,640 lm
FA011894021D	4000K	24°	3,610 lm
FA011894031D	4000K	36°	3,577 lm
FA011894061D	4000K	60°	3,498 lm