
THREE-CIRCUIT TRACK SPOTLIGHT

Linse Track

FARO
Three-circuit track system



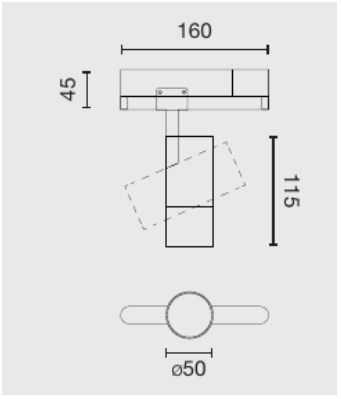

Dimensions in mm

A 50 mm precision spotlight with a high-performance lens, made for accurate, controlled beams on artwork, displays and architectural details. Clip-on accessories soften, shape or cut glare from the beam.

SPECIFICATIONS

Mounting	Faro three-circuit (3-phase) track
Voltage	220–240 V, 50/60 Hz
Power	20 W
Light source	LED, driver included
Luminous flux	1309–1745 lm (see table)
CRI	90
Colour temperature	2700 K, 3000 K or 4000 K
Colour consistency	MacAdam 2–3 step
Beam angle	15°, 24°, 36° or 50°
Adjustment	Rotates 355°, tilts 90°
Rated life	50,000 h (L80/B10)
Protection	IP20, for indoor use
Finish	Matt white or matt black
Control	On/Off or DALI
Size	ø50 mm head, 160 mm adapter

LIGHT OUTPUT (CRI 90)

	15°	24°	36°	50°
2700 K	1,309 lm	1,643 lm	1,641 lm	1,602 lm
3000 K	1,349 lm	1,694 lm	1,692 lm	1,651 lm
4000 K	1,389 lm	1,745 lm	1,742 lm	1,701 lm

Luminous flux from Faro's catalogue.

ACCESSORIES

- White trim ring (FA0390PP0061)
- Gold trim ring (FA0390PP0063)
- Honeycomb lens (FA0390000070)
- Striped glass lens (FA0390000072)
- Cinema lens (FA0390000073)
- Long snoot, white (FA0390PP0031)
- Long snoot, black (FA0390PP0032)

Sold separately.

CONTROL

On/Off	Switched, not dimmable
DALI	Needs Faro DALI track and connectors

Each light's adapter selects one of the track's three circuits.

ORDERING CODES

Linse Track

FARO
48 variants

Every variant, grouped by control and finish. Codes are our stock codes (Faro reference with an FA prefix).

Code	Colour	Beam	Output
On/Off · Matt Black			
FA0391292712	2700K	15°	1,309 lm
FA0391292722	2700K	24°	1,643 lm
FA0391292732	2700K	36°	1,641 lm
FA0391292752	2700K	50°	1,602 lm
FA0391293012	3000K	15°	1,349 lm
FA0391293022	3000K	24°	1,694 lm
FA0391293032	3000K	36°	1,692 lm
FA0391293052	3000K	50°	1,651 lm
FA0391294012	4000K	15°	1,389 lm
FA0391294022	4000K	24°	1,745 lm
FA0391294032	4000K	36°	1,742 lm
FA0391294052	4000K	50°	1,701 lm
On/Off · Matt White			
FA0391292711	2700K	15°	1,309 lm
FA0391292721	2700K	24°	1,643 lm
FA0391292731	2700K	36°	1,641 lm
FA0391292751	2700K	50°	1,602 lm
FA0391293011	3000K	15°	1,349 lm
FA0391293021	3000K	24°	1,694 lm
FA0391293031	3000K	36°	1,692 lm
FA0391293051	3000K	50°	1,651 lm
FA0391294011	4000K	15°	1,389 lm
FA0391294021	4000K	24°	1,745 lm
FA0391294031	4000K	36°	1,742 lm
FA0391294051	4000K	50°	1,701 lm

Code	Colour	Beam	Output
DALI · Matt Black			
FA0391292712D	2700K	15°	1,309 lm
FA0391292722D	2700K	24°	1,643 lm
FA0391292732D	2700K	36°	1,641 lm
FA0391292752D	2700K	50°	1,602 lm
FA0391293012D	3000K	15°	1,349 lm
FA0391293022D	3000K	24°	1,694 lm
FA0391293032D	3000K	36°	1,692 lm
FA0391293052D	3000K	50°	1,651 lm
FA0391294012D	4000K	15°	1,389 lm
FA0391294022D	4000K	24°	1,745 lm
FA0391294032D	4000K	36°	1,742 lm
FA0391294052D	4000K	50°	1,701 lm
DALI · Matt White			
FA0391292711D	2700K	15°	1,309 lm
FA0391292721D	2700K	24°	1,643 lm
FA0391292731D	2700K	36°	1,641 lm
FA0391292751D	2700K	50°	1,602 lm
FA0391293011D	3000K	15°	1,349 lm
FA0391293021D	3000K	24°	1,694 lm
FA0391293031D	3000K	36°	1,692 lm
FA0391293051D	3000K	50°	1,651 lm
FA0391294011D	4000K	15°	1,389 lm
FA0391294021D	4000K	24°	1,745 lm
FA0391294031D	4000K	36°	1,742 lm
FA0391294051D	4000K	50°	1,701 lm