
THREE-CIRCUIT TRACK LINEAR LIGHT

# Via Evo Track 1130

**FARO**
Three-circuit track system



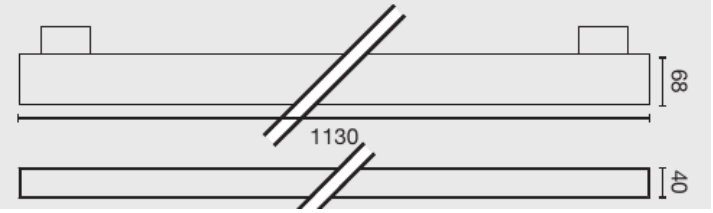


Dimensions in mm

A 1130 mm linear light that clips onto the three-circuit track for even, general lighting in kitchens, shops, offices and corridors, alongside spotlights on the same track. Two track adapters hold it level along the track. Opal or microprism diffuser.

## SPECIFICATIONS

| | |
|---|---|
| Mounting | Faro three-circuit (3-phase) track |
| Voltage | 220–240 V, 50/60 Hz |
| Power | 27 W or 51 W; tunable white 48 W |
| Light source | LED, driver included |
| CRI | 80 |
| Colour temperature | 3000 K or 4000 K; tunable white 2700–6500 K (DALI only) |
| Colour consistency | MacAdam 3 step |
| Diffuser | Opal (110°) or microprism (90°) |
| Rated life | 50,000 h (L80/B10) |
| Protection | IP20, for indoor use |
| Finish | Matt white or matt black |
| Control | On/Off or DALI (tunable white is DALI only) |
| Size | 1130 mm long, 40 mm wide, 69 mm high |

## LIGHT OUTPUT

| | Opal | Microprism |
|---|---|---|
| 27 W 3000 K | 2,842 lm | 2,313 lm |
| 51 W 3000 K | 5,112 lm | 4,161 lm |
| 27 W 4000 K | 2,927 lm | 2,382 lm |
| 51 W 4000 K | 5,265 lm | 4,286 lm |
| 48 W tunable white | 4,006 lm | 3,261 lm |

Luminous flux from Faro's catalogue.

## CONTROL

| | |
|---|---|
| On/Off | Switched, not dimmable |
| DALI | Needs Faro DALI track and connectors |

Each light's adapter selects one of the track's three circuits.

ORDERING CODES

# Via Evo Track 1130

**FARO**
36 variants

Every variant, grouped by control and finish. Codes are our stock codes (Faro reference with an FA prefix).

| Code | Output | Diffuser | Light |
|---|---|---|---|
| **On/Off · Matt Black** | | | |
| FA0410T5102 | 51W 3000K | Opal | 5,112 lm |
| FA0410T5102U | 51W 3000K | Microprism | 4,161 lm |
| FA0410T6002 | 51W 4000K | Opal | 5,265 lm |
| FA0410T6002U | 51W 4000K | Microprism | 4,286 lm |
| FA0410T5302 | 27W 3000K | Opal | 2,842 lm |
| FA0410T5302U | 27W 3000K | Microprism | 2,313 lm |
| FA0410T6202 | 27W 4000K | Opal | 2,927 lm |
| FA0410T6202U | 27W 4000K | Microprism | 2,382 lm |
| **On/Off · Matt White** | | | |
| FA0410T5101 | 51W 3000K | Opal | 5,112 lm |
| FA0410T5101U | 51W 3000K | Microprism | 4,161 lm |
| FA0410T6001 | 51W 4000K | Opal | 5,265 lm |
| FA0410T6001U | 51W 4000K | Microprism | 4,286 lm |
| FA0410T5301 | 27W 3000K | Opal | 2,842 lm |
| FA0410T5301U | 27W 3000K | Microprism | 2,313 lm |
| FA0410T6201 | 27W 4000K | Opal | 2,927 lm |
| FA0410T6201U | 27W 4000K | Microprism | 2,382 lm |
| **DALI · Matt Black** | | | |
| FA0410T5102D | 51W 3000K | Opal | 5,112 lm |
| FA0410T5102DU | 51W 3000K | Microprism | 4,161 lm |
| FA0410T6002D | 51W 4000K | Opal | 5,265 lm |
| FA0410T6002DU | 51W 4000K | Microprism | 4,286 lm |
| FA0410T5302D | 27W 3000K | Opal | 2,842 lm |
| FA0410T5302DU | 27W 3000K | Microprism | 2,313 lm |
| FA0410T6202D | 27W 4000K | Opal | 2,927 lm |
| FA0410T6202DU | 27W 4000K | Microprism | 2,382 lm |
| FA0410T0502 | 48W Tunable White | Opal | 4,006 lm |
| FA0410T0502U | 48W Tunable White | Microprism | 3,261 lm |
| **DALI · Matt White** | | | |
| FA0410T5101D | 51W 3000K | Opal | 5,112 lm |
| FA0410T5101DU | 51W 3000K | Microprism | 4,161 lm |
| FA0410T6001D | 51W 4000K | Opal | 5,265 lm |
| FA0410T6001DU | 51W 4000K | Microprism | 4,286 lm |
| FA0410T5301D | 27W 3000K | Opal | 2,842 lm |
| FA0410T5301DU | 27W 3000K | Microprism | 2,313 lm |
| FA0410T6201D | 27W 4000K | Opal | 2,927 lm |
| FA0410T6201DU | 27W 4000K | Microprism | 2,382 lm |
| FA0410T0501 | 48W Tunable White | Opal | 4,006 lm |
| FA0410T0501U | 48W Tunable White | Microprism | 3,261 lm |