


White 2700k FA43726

Black 2700k FA43727



Mounting	Wall, Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	12
Energy class light source	F
Light source	COB LED
Light source included	Yes
Luminous Flux (lm)	1016
Color temperature (K)	2700K
Opening angle degrees	36
Light orientation	DIRECTA
Tilt angles	90
Rotation angles 2	355
CRI	>90
Driver included	Yes
Structure material	Aluminium +ABS
Diffuser material	PC Matt
Structure finish	
Diffuser finish	Transparent

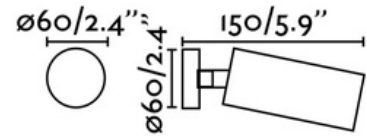

White 3000k FA43772

Black 3000k FA43773



Mounting	Ceiling, Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	12
Energy class light source	F
Light source	COB LED
Light source included	Yes
Luminous Flux (lm)	942
Color temperature (K)	3000K
Dimmable luminaire (W)	No
Opening angle degrees	36
Light orientation	DIRECTA
Tilt angles	90
Rotation angles 2	355
CRI	≥90
Driver included	Yes
Structure material	Aluminium + ABS
Diffuser material	PC
Structure finish	
Diffuser finish	Transparent

