



# MASTER VALUE LED spot MV

## Master LED 4.9-50W GU10 927 36D Dim

MASTER Value, LED, PAR16, Only with specific dimmers, GU10, 2700 K, 395 lm, CRI 90, 25000 h

Delivering a warm, halogen-like accent beam, MASTER VALUE is a perfect fit for spot lighting. Thanks to its high CRI, it realizes more natural colors, creating cozy and comfortable ambiances for residential and hospitality projects, and emphasizing the beauty of merchandise in retail. These LED spots MV GU10 have the familiar look and feel of spot lamps, keeping the classic beauty of glass spots and adding the strong performance of LED technology. The dimming function enables you to create the atmosphere you desire, and it works with broad selection of dimmers. MASTER VALUE also offers more energy savings than normal LED spots.

### Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

### Product data

General Information	
Cap-Base	GU10
Nominal lifetime	25,000 h
Switching Cycle	50,000
Lighting Technology	LED

Light Technical	
Color Code	927
Beam Angle (Nom)	36 degree(s)
Luminous Flux	395 lm
Luminous Intensity (Nom)	650 cd
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K

# MASTER VALUE LED spot MV

Luminous Efficacy (rated) (Nom)	80.61 lm/W
Color Consistency	<6
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	355 lm

## Operating and Electrical

Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	5 W
Lamp Current (Nom)	27 mA
Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.8
Voltage (Nom)	220-240 V

## Temperature

T-Case Maximum (Nom)	80 °C
----------------------	-------

## Controls and Dimming

Dimmable	Only with specific dimmers
----------	----------------------------

## Mechanical and Housing

Bulb Shape	PAR16
------------	-------

Net Weight (Piece)	0.038 kg
--------------------	----------

## Approval and Application

Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	5 kWh
EU RoHS compliant	Yes
EyeComfort	Yes


## Application Conditions

can it be used in closed luminaires	No
-------------------------------------	----

## Product Data

Order product name	Master LED 4.9-50W GU10 927 36D Dim
Full product name	Master LED 4.9-50W GU10 927 36D Dim
Full product code	871869670731900
Local code description	M395L36D927GU10
Order code	929001348808
Material Nr. (12NC)	929001348808
Local order code	M395L36D927GU10
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696707319
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696707326


## Dimensional drawing




Product	D	C
Master LED 4.9-50W GU10 927 36D Dim	50 mm	54 mm

# MASTER VALUE LED spot MV

## Photometric data




General Parameters 4.1 Photo Lighting 8.1 Page 17

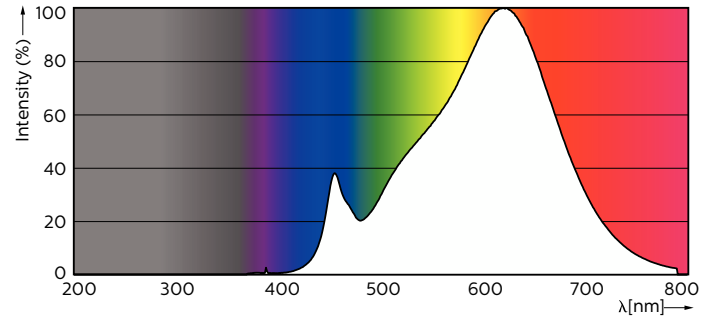



Accent Lighting Spots - Master LED 4.9-50W GU10 927 36D Dim

Spectral Power Distribution Colour - Master LED 4.9-50W GU10 927 36D Dim



Light Distribution Diagram - Master LED 4.9-50W GU10 927 36D Dim

## Lifetime

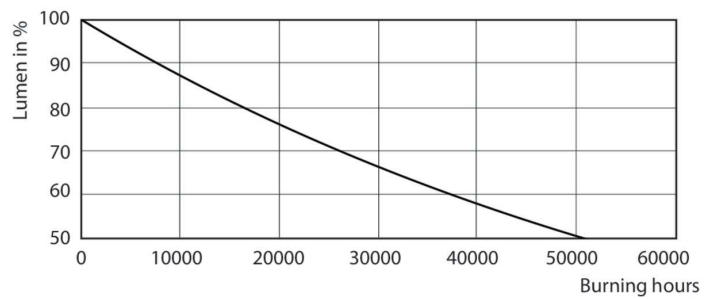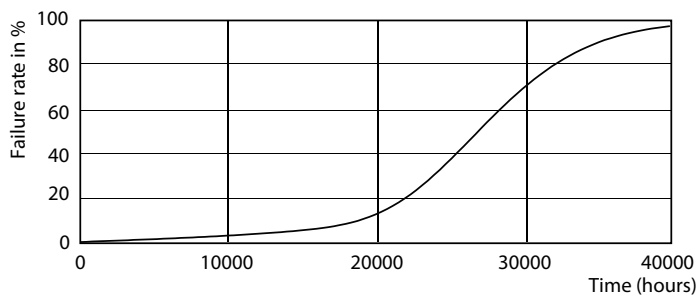

25K LED

Lumen Maintenance Diagram - Master LED 4.9-50W GU10 927 36D Dim

## MASTER VALUE LED spot MV

