

TECHNICAL DATA SHEET

MIST 50 FIXED IP54

Bathroom



Fixed- 45°

Cut out 184x234 mm

Material: CALCYT® plaster

PHASE DIMMABLE

- Including phase dimmable LED driver
- Driver can be used as on/off or phase dim
- Driver fits through the gypsum opening
- Recessed depth h = 110 mm (incl driver)
- Standard beam 36°- Optional 24° or 12° beam

DALI DIMMABLE

- Including DALI dimmable LED driver
- Driver fits through the gypsum opening
- Recessed depth h = 155 mm (incl driver)
- Standard beam 36°- Optional 24° or 12° beam

Mist Fixed IP54- 700lm Phase Dim

Dlm to warm 3000k-1800k	2700k	3000k	4000k
BR24772641	BR24772041	BR24772141	BR24772241
6W - 700LM - CRI 92 - 2 step MacAdam			

Mist Fixed IP54- 700lm Dali Dim

Dlm to warm 3000k-1800k	2700k	3000k	4000k
BR24732641	BR24732041	BR24732141	BR24732241
6W - 700LM - CRI 92 - 2 step MacAdam			

Mist Fixed IP54- 1000lm Phase Dim

	2700k	3000k	4000k
	BR24774041	BR24774141	BR24774241
9.1W - 1000lm- CRI 97 - 2 step MacAdam			

Mist Fixed IP54 - 1000lm Dali Dim

	2700k	3000k	4000k
	BR24734041	BR24734141	BR24734241
9.1W - 1000lm- CRI 97 - 2 step MacAdam			

Mist Fixed IP54- 1300lm Phase Dim

Dlm to warm 3000k-1800k	2700k	3000k	4000k
BR24773641	BR24773041	BR24773141	BR24773241
12.7w - 1300lm - CRI 92 - 2 step MacAdam			

Mist Fixed IP54- 1300lm Dali Dim

Dlm to warm 3000k-1800k	2700k	3000k	4000k
BR24733641	BR24733041	BR24733141	BR24733241
12.7w - 1300lm - CRI 92 - 2 step MacAdam			


INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 -12 -15 mm

BR24799025 installation system for gypsum ceiling 25 mm

BR24799030 installation system for gypsum ceiling 30 mm Concrete

BR84900000 box Pixo 50 - Galvanized steel - Image Below

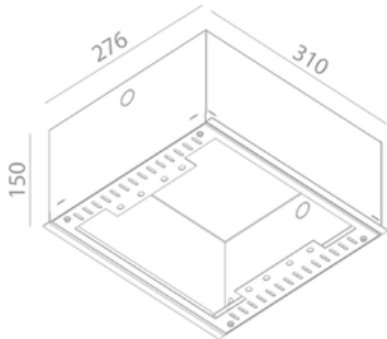

BEAM ANGLES

STANDARD (included) beam angle 36°

BR20550024 (option) beam angle 24°

BR20550012 (option) beam angle 12°



Optional Frosted Diffuser

BR20151001

