

TECHNICAL DATA SHEET

PIXO 1 x 50 TRIMLESS FIX IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR



Fix(not adjustable) 0° - 0°

Cut out 114x134 mm

Material: CALCYT® plaster

PHASE DIMMABLE

- Including phase dimmable LED driver
- Driver can be used as on/off or phase dim
- Driver fits through the gypsum opening
- Recessed depth h = 110 mm (incl driver)
- Standard beam 36°- Optional 24° or 12° beam

DALI DIMMABLE

- Including DALI dimmable LED driver
- Driver fits through the gypsum opening
- Recessed depth h = 155 mm (incl driver)
- Standard beam 36°- Optional 24° or 12° beam

Pixo 50 Fixed - 700lm Phase Dim			
Dim to warm 3000k-1800k	2700k	3000k	4000k
BR22772640	BR22772040	BR22772140	BR22772240
6W - 700LM - CRI 92 - 2 step MacAdam			

Pixo 50 Fixed - 700lm Dali Dim			
Dim to warm 3000k-1800k	2700k	3000k	4000k
BR22732640	BR22732040	BR22732140	BR22732240
6W - 700LM - CRI 92 - 2 step MacAdam			

Pixo 50 Fixed - 1000lm Phase Dim			
	2700k	3000k	4000k
	BR22774040	BR22774140	BR22774240
9.1W - 1000lm- CRI 97 - 2 step MacAdam			

Pixo 50 Fixed - 1000lm Dali Dim			
	2700k	3000k	4000k
	BR22734040	BR22734140	BR22734240
9.1W - 1000lm- CRI 97 - 2 step MacAdam			

Pixo 50 Fixed - 1300lm Phase Dim			
Dim to warm 3000k-1800k	2700k	3000k	4000k
BR22772640	BR22772040	BR22772140	BR22772240
12.7w - 1300lm - CRI 92 - 2 step MacAdam			

Pixo 50 Fixed - 1300lm Dali Dim			
Dim to warm 3000k-1800k	2700k	3000k	4000k
BR22732640	BR22732040	BR22732140	BR22732240
12.7w - 1300lm - CRI 92 - 2 step MacAdam			


INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 -12 -15 mm

BR26199025 installation system for gypsum ceiling 25 mm

BR26199030 installation system for gypsum ceiling 30 mm Concrete

BR82700000 box Pixo 50 - Galvanized steel - Image Below

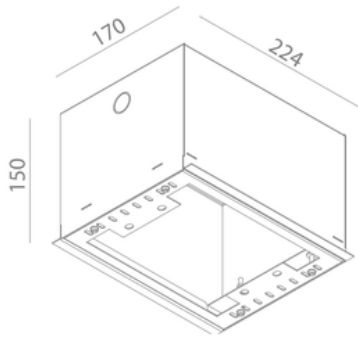

BEAM ANGLES

STANDARD (included) beam angle 36°

BR20550024 (option) beam angle 24°

BR20550012 (option) beam angle 12°

