

# TECHNICAL DATA SHEET

## PIXO 1 x 50 TRIMLESS FIX IP54

Bathroom



Fix(not adjustable) 0° - 0°

Cut out 114x134 mm

Material: CALCYT® plaster

### PHASE DIMMABLE

- Including phase dimmable LED driver
- Driver can be used as on/off or phase dim
- Driver fits through the gypsum opening
- Recessed depth h = 110 mm (incl driver)
- Standard beam 36°- Optional 24° or 12° beam

### DALI DIMMABLE

- Including DALI dimmable LED driver
- Driver fits through the gypsum opening
- Recessed depth h = 155 mm (incl driver)
- Standard beam 36°- Optional 24° or 12° beam

Pixo 50 Fixed IP54- 700lm Phase Dim			
Dlm to warm 3000k-1800k	2700k	3000k	4000k
BR26172641	BR26172041	BR26172141	BR26172241
6W - 700LM - CRI 92 - 2 step MacAdam			

Pixo 50 Fixed IP54- 700lm Dali Dim			
Dlm to warm 3000k-1800k	2700k	3000k	4000k
BR26132641	BR26132041	BR26132141	BR26132241
6W - 700LM - CRI 92 - 2 step MacAdam			

Pixo 50 Fixed IP54- 1000lm Phase Dim			
	2700k	3000k	4000k
	BR26174041	BR26174141	BR26174241
9.1W - 1000lm- CRI 97 - 2 step MacAdam			

Pixo 50 Fixed IP54 - 1000lm Dali Dim			
	2700k	3000k	4000k
	BR26134041	BR26134141	BR26134241
9.1W - 1000lm- CRI 97 - 2 step MacAdam			

Pixo 50 Fixed IP54- 1300lm Phase Dim			
Dlm to warm 3000k-1800k	2700k	3000k	4000k
BR26173641	BR26173041	BR26173141	BR26173241
12.7w - 1300lm - CRI 92 - 2 step MacAdam			

Pixo 50 Fixed IP54 - 1300lm Dali Dim			
Dlm to warm 3000k-1800k	2700k	3000k	4000k
BR26133641	BR26133041	BR26133141	BR26133241
12.7w - 1300lm - CRI 92 - 2 step MacAdam			




## INSTALLATION KIT

### STANDARD (included) installation system for ceiling 9 -12 -15 mm

BR26199025 installation system for gypsum ceiling 25 mm

BR26199030 installation system for gypsum ceiling 30 mm Concrete

BR82700000 box Pixo 50 - Galvanized steel - Image Below

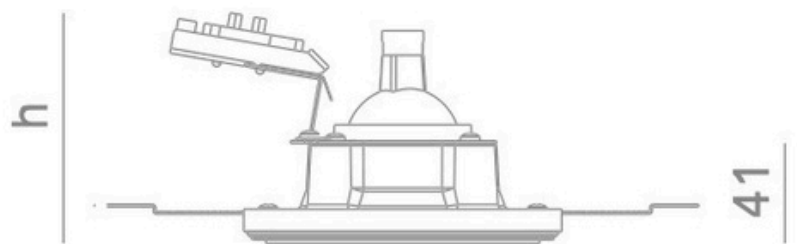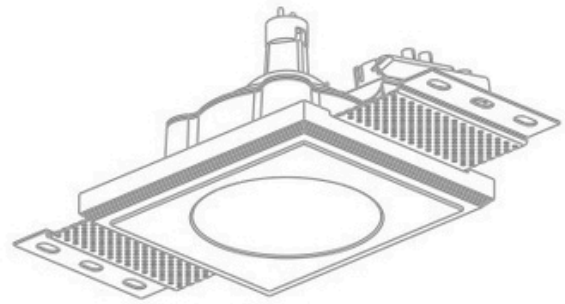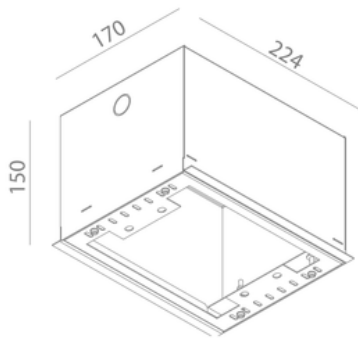

## BEAM ANGLES

### STANDARD (included) beam angle 36°

BR20550024 (option) beam angle 24°

BR20550012 (option) beam angle 12°



**Optional Frosted Diffuser**

BR20151001

