


(LUMN) SUSPENSION 67W LED
(CACU)
(TS) 67W LED (TOLU) 2187

(CAP) STICK SO 1500
(IDNM) 2022000191 / MILAB SRLS
(PLA)

POLAR DIAGRAM (cd/klm)

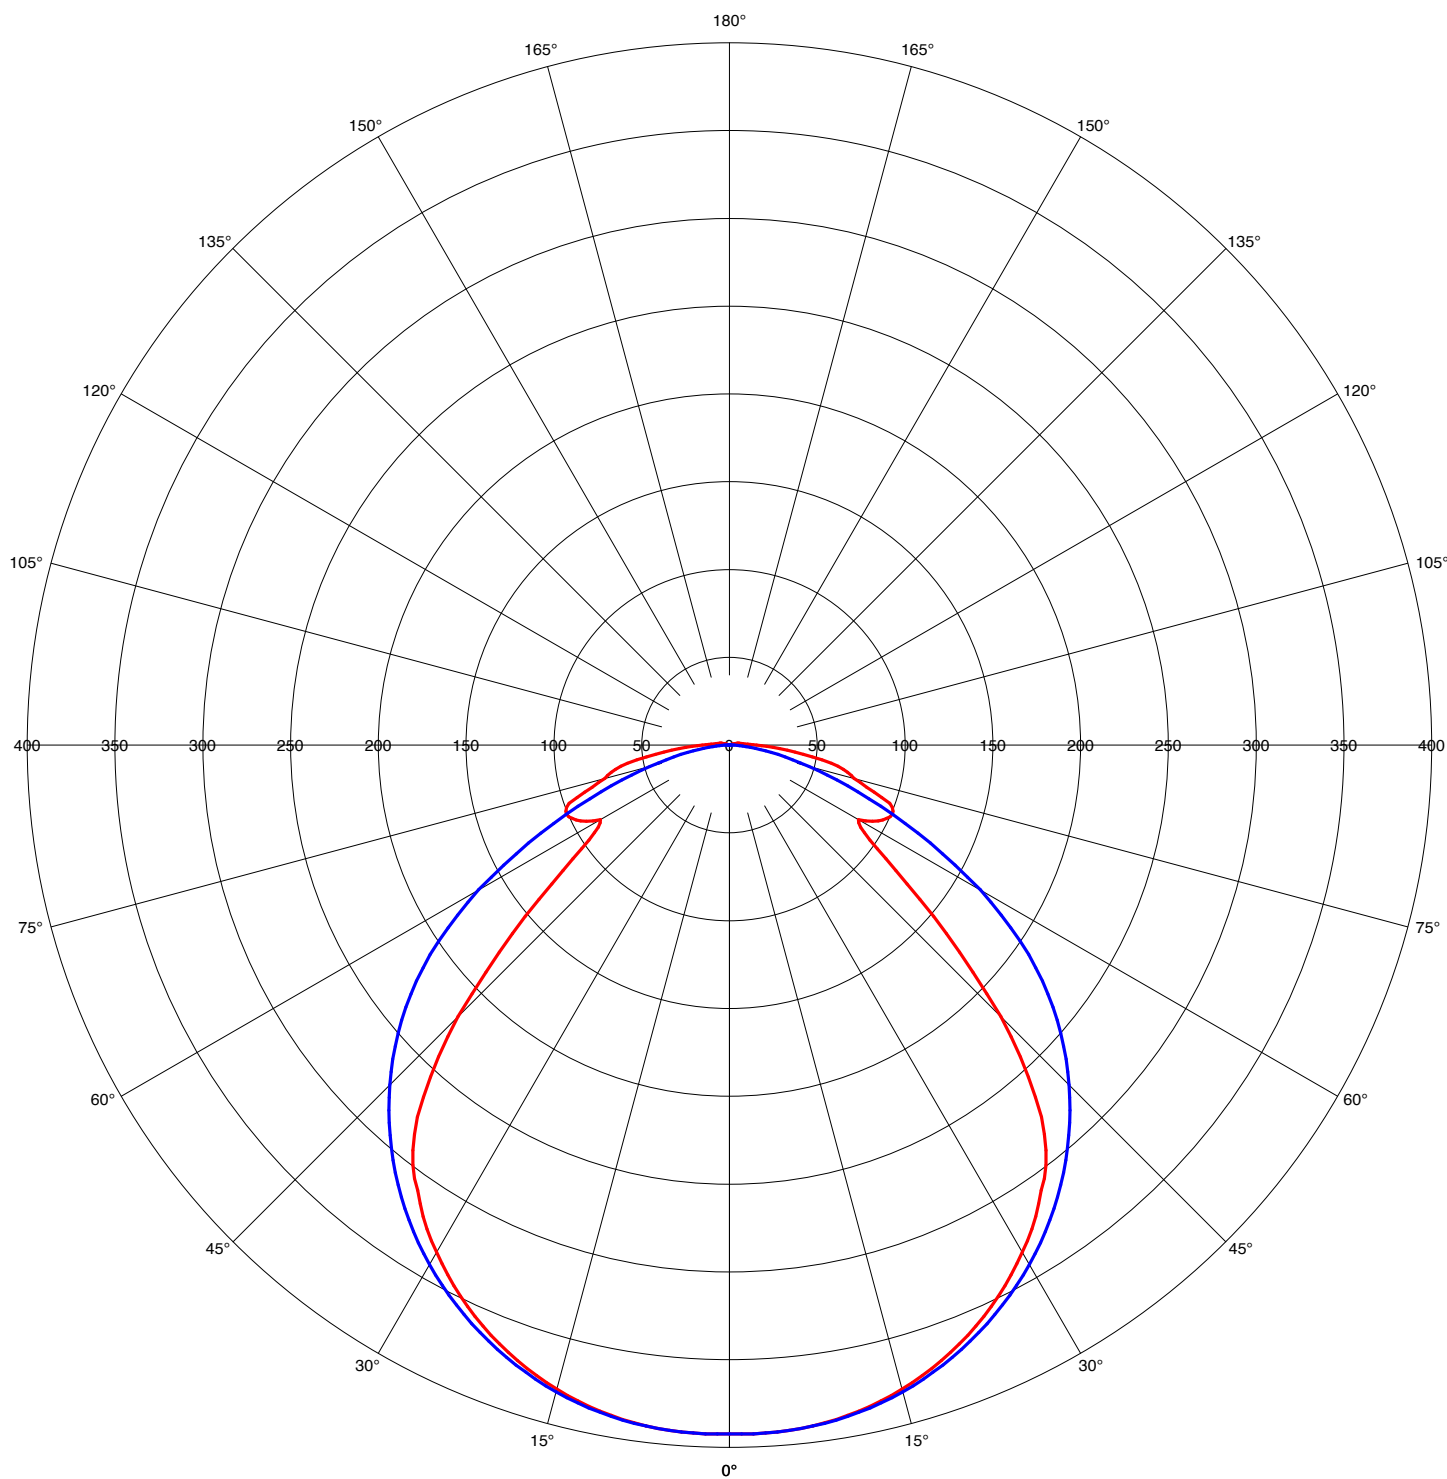

C = 0-180° 90-270°

CIE code: 54 83 95 99 100
Performance: LOR = 100,0; DLOR = 99,2; ULOR = 0,8
Beam opening: C0-180 = 92,0°; C90-270 = 112,0°
Asymmetry: IMax = 392,4 cd/klm; C = 0,0°; range = 2,0°
Orientation: 0° - Incline: 0° - Rotation: 0°