





OVERVIEW



- Light segments in 24–72" lengths can be suspended individually or attached to each other — using simple snap-in magnetic connector rings — to create various linear fixture lengths up to 24 ft (nominal)
 - Segments can individually rotate 360°
 - 24 VDC output Class 2 constant voltage power supply
 - 120–277 VAC input voltage
 - Dimming options: 2-Wire/TRIAC/Forward Phase; 0–10 V; 3-Wire
 - Field-adjustable aircraft cables and clear-jacketed co-axial silver cord
 - Direct-mount (to ceiling)
-
- CRI 95+
 - R9 90+
 - 90 LM/W delivered efficacy
 - 300 LM per linear foot (maximum)
 - Frosted lens with 90° beam spread



Example:
JPR-THES-MONO-XXX-000044-XX-XX
 8' nominal (2 light segments)

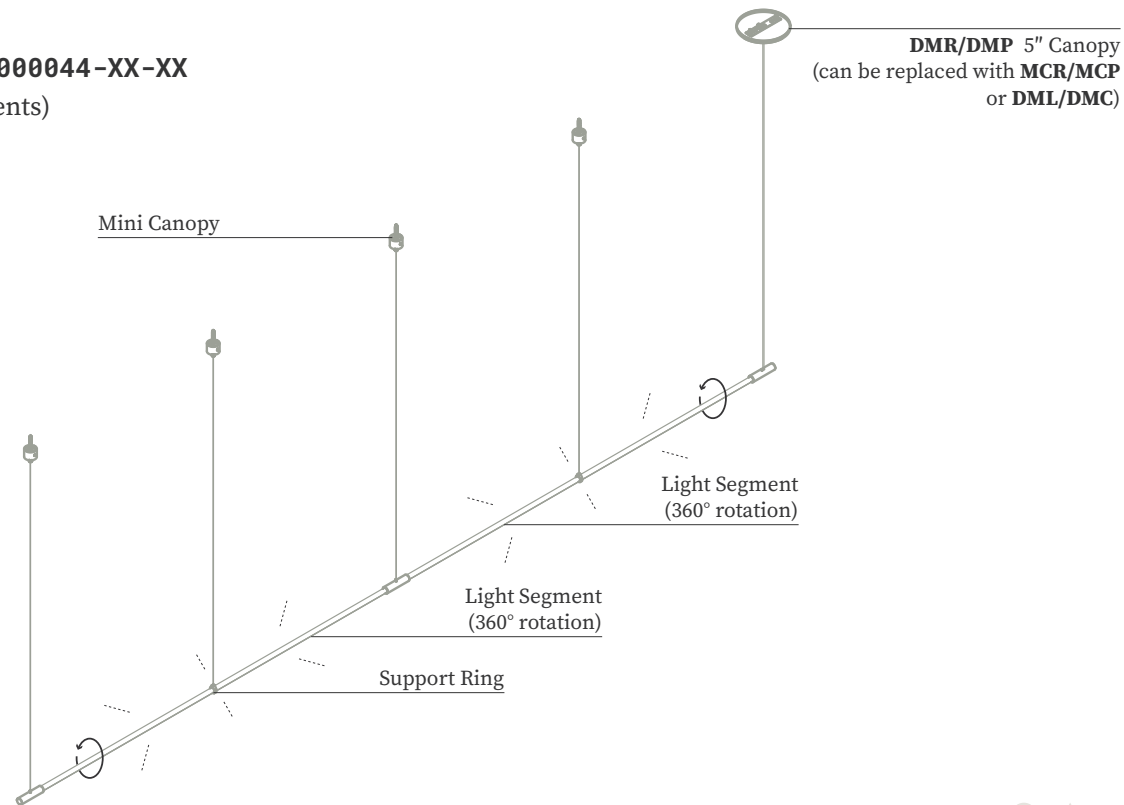

Maximum cable length is 114 in | 2896 mm.



SPECIFICATION BUILDER


JPR-THES-MONO- - - -

1. Mounting	2. Segments	3. CCT	4. Finish
MCR Mini Canopy Remote Power Supply not included	000002 2' 000003 3'	27 2700 K 30 3000 K	01 <input type="checkbox"/> SGN Satin Brass 02 <input type="checkbox"/> SGN Black Oxide
MCP Mini Canopy Remote Power Supply included	000004 4' 000005 5'	35 3500 K 40 4000 K	03 <input type="checkbox"/> SGN Satin Nickel 40 <input type="checkbox"/> SGN English Bronze
DMR 5" Canopy Remote Power Supply not included	000006 6' 000044 8'		30 <input type="checkbox"/> PRO Matte Pure White 32 <input type="checkbox"/> PRO Matte Black
DMP 5" Canopy Remote Power Supply included	000333 9' 000055 10'		33 <input type="checkbox"/> PRO Satin Aluminum CU <input type="checkbox"/> PRO Custom
DML Juniper Power Hub – White Power Supply included	000066 12' 000555 15'		
DMC Juniper Power Hub – Custom Power Supply included	004444 16' 000666 18' 005555 20' 006666 24'		


See [Finishes](#) for additional options.

See pages 18–21 for mounting/spacing configurations and dimensions for various fixture lengths.

POWER FEED OPTIONS

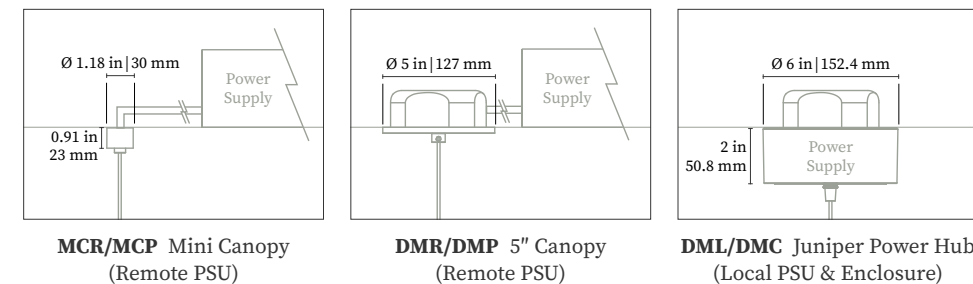

MOUNTING OPTIONS

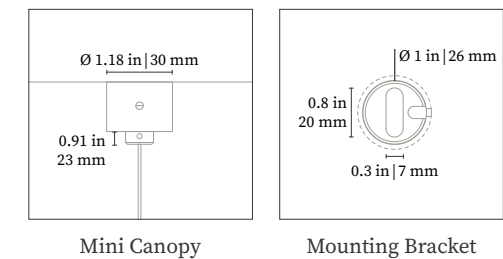

For detailed photometrics, see [Photometric Data](#).
 IES files available.




SYSTEM LOGIC

Example:

JPR-THES-MONO-XXX-000044-XX-XX

8' nominal (2 light segments)

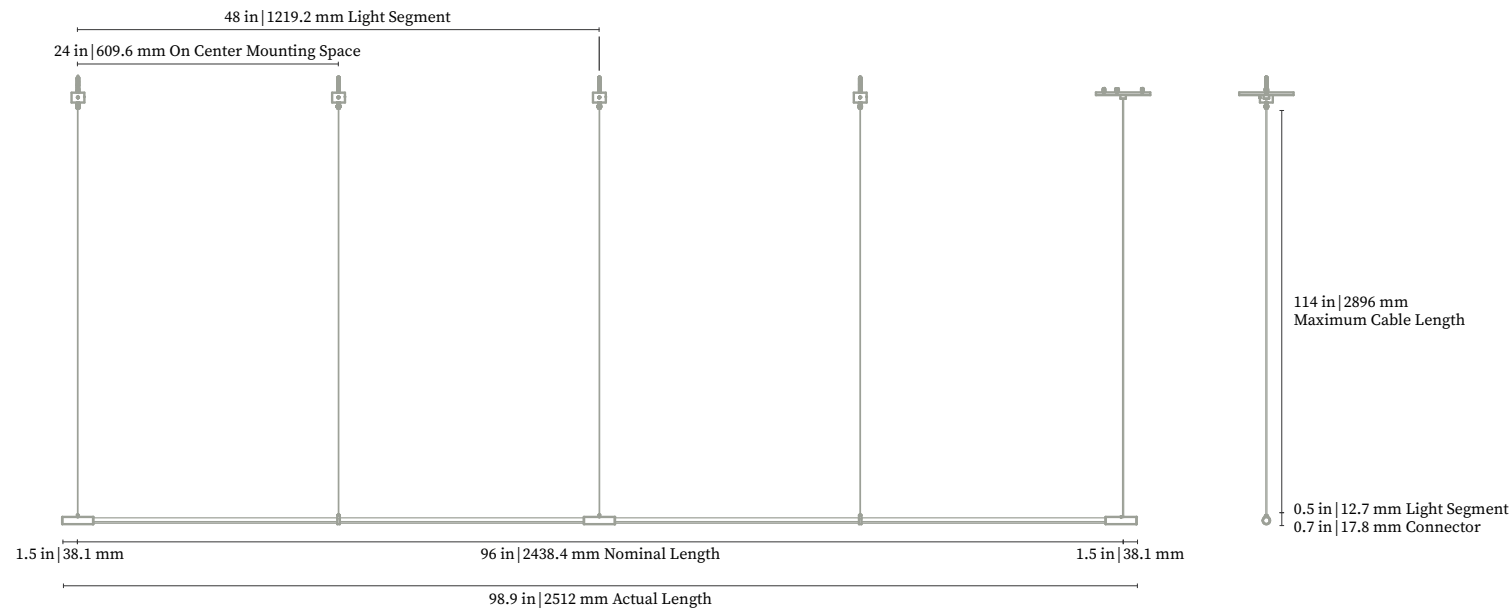

CONFIGURATIONS — DATA

1. SKU	2. Nominal Length	3. Actual Length	4. Quantity of Light Segments	5. On Center Mounting Space	6. Quantity of Mounting Points	7. Total Wattage (W)	8. LM
000002	2'	26.875 in	1	24 in	2	6.8	600
000003	3'	38.875 in	1	36 in	2	9.6	920
000004	4'	50.875 in	1	24 in	3	13.1	1240
000005	5'	62.875 in	1	30 in	3	16.6	1560
000006	6'	74.875 in	1	36 in	3	20	1900
000044	8'	98.875 in	2	24 in	5	26.2	2480
000333	9'	110.875 in	3	36 in	4	29.1	2760
000055	10'	122.875 in	2	30 in	5	33.2	3120
000066	12'	146.875 in	2	36 in	5	40	3800
000555	15'	182.875 in	3	30 in	7	49.8	4680
004444	16'	194.875 in	4	24 in	9	52.4	4960
000666	18'	218.875 in	3	36 in	7	60	5700
005555	20'	242.875 in	4	30 in	9	66.4	6240
006666	24'	290.875 in	4	36 in	9	80	7600


For the configuration drawings, see pages 21–21.




For detailed photometrics, see [Photometric Data](#).
IES files available.




CONFIGURATIONS — DIAGRAMS

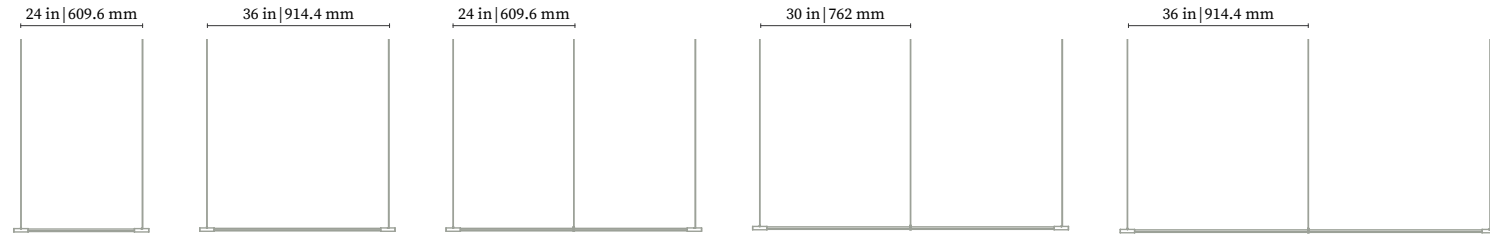

000002 2 ft nominal
000003 3 ft nominal
000004 4 ft nominal
000005 5 ft nominal
000006 6 ft nominal

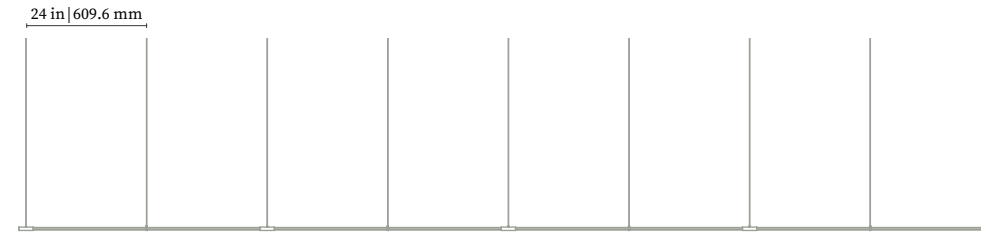


004444
 16 ft nominal

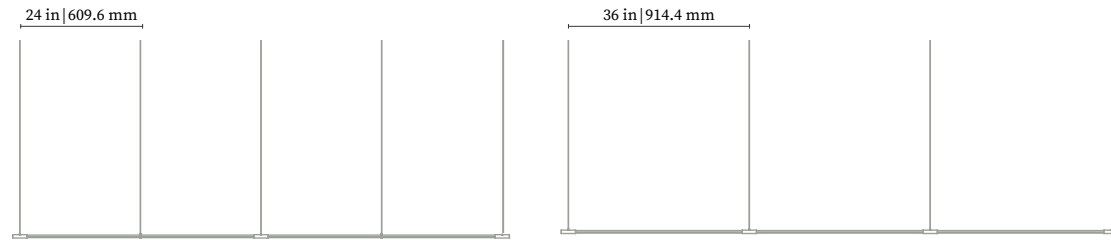


000044 8 ft nominal
000333 9 ft nominal




000666
 18 ft nominal

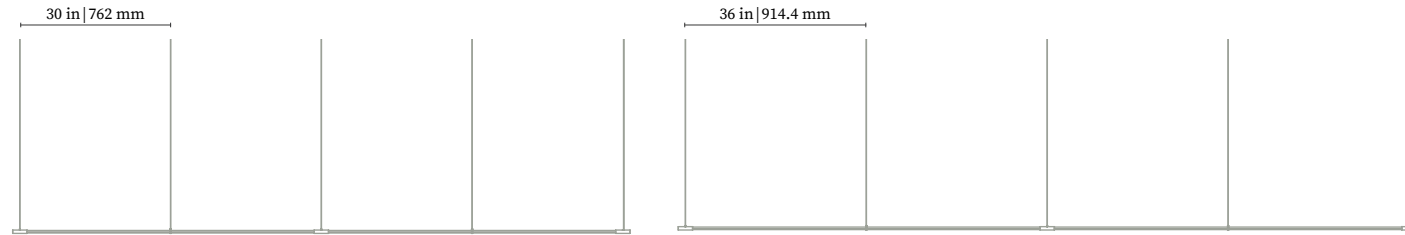


000055 10 ft nominal
000066 12 ft nominal

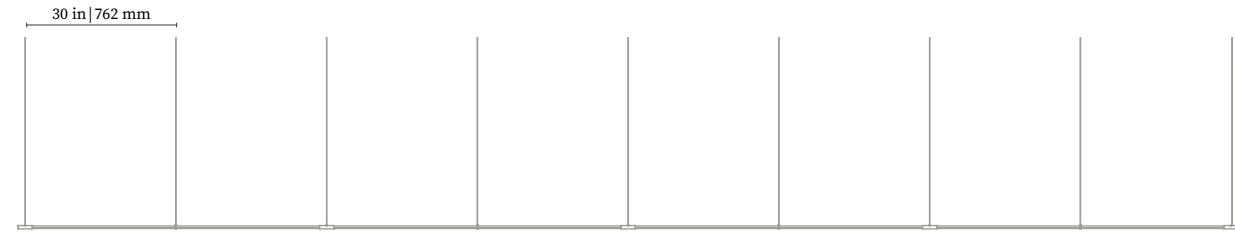

005555
 20 ft nominal

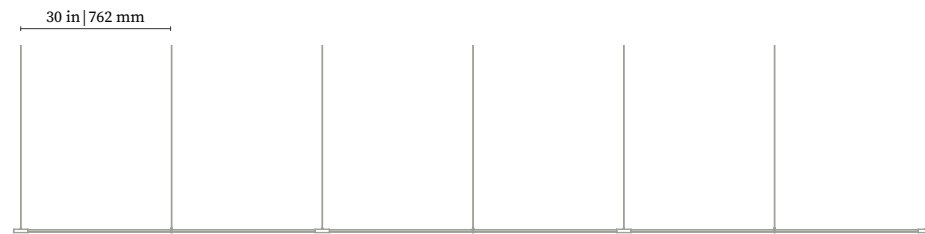

000555
 15 ft nominal

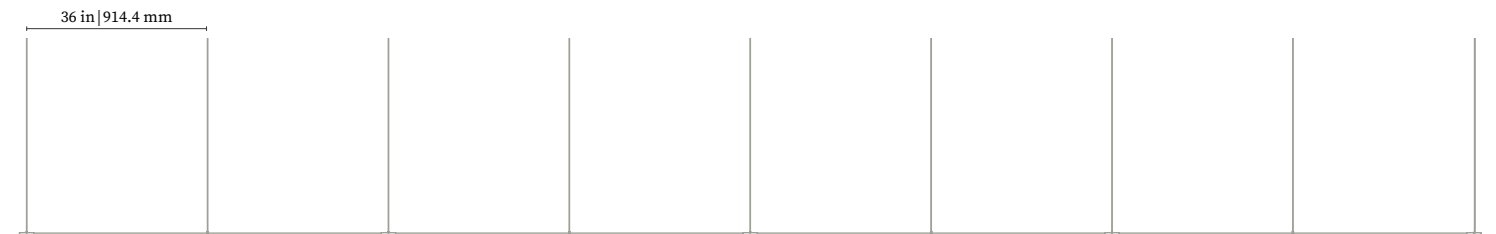

006666
 24 ft nominal

