




Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	44
IK	03
Power (W)	18
Energy class light source	E
Light source	SMD LED
Light source included	Yes
Luminous Flux (lm)	1174
Color temperature (K)	2700K
Dimmable luminaire (W)	No
CRI	>80
Suitable for seaside areas	No
Driver included	Yes
Structure material	Concrete
Diffuser material	PMMA
Structure finish	Dark Grey
Diffuser finish	Opal


↓ Installation instructions

↓ Energy label

↓ Photometric

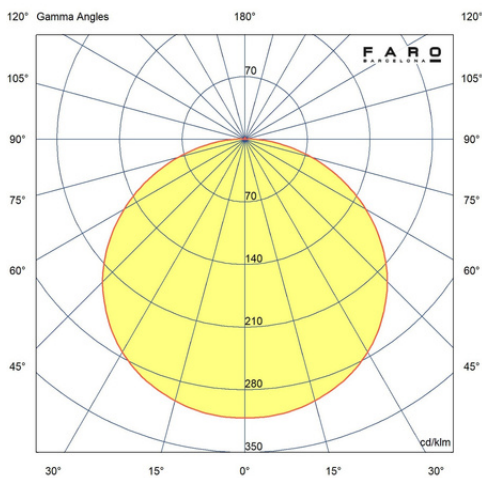

Ø240/9.45"



65/2.56"

