

JUNIPER®

Honesty in design can be found in the details

07**SYSTEMS BY USE**

PENDANTS
CEILING FLUSH MOUNT
SCONCE
WALL-MOUNT
CHANDELIER
TABLETOP
OUTDOOR

09**LIGHTING PROJECTS****27****THIN SYSTEM**

THIN Task Lamp
THIN Floor Lamp
THIN Shared Task Lamp
THIN Suspension
THIN Vertical Suspension
THIN Surface Mount
THIN Float Sconce
THIN Multiples
THIN Primaries
THIN Solids
THIN Chandelier

87**UNIVERSE SYSTEM****99****METROPOLIS SYSTEM**

METROPOLIS Suspension
METROPOLIS Wall Sconce
METROPOLIS Wall-To-Wall

109**AXIS SYSTEM**

AXIS T
AXIS X

117**THE FLUTES SYSTEM**

IONIAN Pendant
IONIAN Ceiling Mount
IONIAN Array
LYDIAN Pendant
LYDIAN Ceiling Mount
LYDIAN Sconce
LYDIAN Array
DORIAN Pendant
DORIAN Ceiling Mount
DORIAN Sconce
DORIAN Array

147**LOVE ME NOT****149****GROUND CONTROL**

Dimmer Dial
Dimmer Knob
Toggle Switch
Power Outlet
Double USB
Double USB-C Port

157

COMPONENTS

- CABLE COLLAR THIN SUSPENSION
- CABLE COLLAR THIN PRIMARIES
- LOCAL CANOPY
- THIN TASK LAMP WALL MOUNT
- THIN TASK LAMP INSET GROMMET
- JUNCTION BOX COVER PLATE

POWER DISTRUBUTION
UNIVERSE SYSTEM **87**

CHANDELIER
THIN Chandelier **82**

ARRAY
THE FLUTES Ionian Array **123**
THE FLUTES Lydian Array **131**

PENDANTS
THIN Suspension **36**
THIN Vertical Suspension **36**
THIN Multiples Dyad **43**
THIN Mutiples Triad **44**
THIN Multiples Tetrad **47**
THIN Primaries Suspended Triangle **63**
THIN Primaries Suspended Square **64**
THIN Primaries Suspended Rhombus **67**
THIN Primaries Suspended Rectangle **68**
THIN Primaries Suspended Hexagon **71**
THIN Primaries Suspended Octagon **72**
THIN Solids Cube **77**
THIN Solids Tetrahedron **78**
THIN Solids Diamond **81**
METROPOLIS Suspension **101**
AXIS T **111**
AXIS X **112**
THE FLUTES Ionian Pendant **119**
THE FLUTES Lydian Pendant **124**
THE FLUTES Dorian Pendant **132**
LOVE ME NOT **147**

SCONCE
THIN Single Float **38**
THIN Retro Float **38**
METROPOLIS Wall Sconce **102**
AXIS Wall Sconce **112**
THE FLUTES Lydian Sconce **128**
THE FLUTES Dorian Sconce **136**

SYSTEMS BY USE

TABLETOP

THIN Task Lamp **28**

TABLE MOUNT

THIN Shared Task Lamp **31**

GROUND CONTROL Dimmer Dial **152**

GROUND CONTROL Dimmer Knob **15**

GROUND CONTROL Toggle Switch **15**

GROUND CONTROL Power Outlet **152**

GROUND CONTROL Double USB **152**

GROUND CONTROL Double USB-C Port **152**

WALL-MOUNT

THIN Surface Mount **37**

THIN Primaries Surface Mount Triangle **51**

THIN Primaries Surface Mount Square **52**

THIN Primaries Surface Mount Rhombus **56**

THIN Primaries Surface Mount Rectangle **56**

THIN Primaries Surface Mount Hexagon **59**

THIN Primaries Surface Mount Octagon **61**

METROPOLIS Wall-to-Wall **106**

CEILING FLUSH MOUNT

THE FLUTES Ionian Ceiling Mount **121**

THE FLUTES Lydian Ceiling Mount **128**

THE FLUTES Dorian Ceiling Mount **136**

THE FLUTES Dorian Array **139**

LIGHTING PROJECTS

Remedy Place
Photo by Madeline Tolle

Assemblage
Photo by Mikiko Kikuyama

Juniper Showroom
Photo by Juniper

Barclay's Diamond Lounge
Photo by Tom Sibley

Mission Victorian
Photo by Brad Knipstein

VanBarton
Photo by Juniper

Alternative Tech Client
Photo by Garrett Rowland

YODEZEEN
Photo by YODEZEEN





a.

a.

a. thin task lamp with wall mount,
standard size, black oxide, x3

α.





a. metropolis wall-to-wall, 26" modules,
satin brass, suspension mount



a.



a. axis x, 36",
polished brass, direct-mount

b. axis t wall scone, 36",
polished brass, direct-mount



a.



a. thin surface mount, 36" segments, x6, 3.5" stand-offs,
satin brass, direct-mount





- a. thin suspension, 24",
b. thin primaries hexagon, 36" segments, x3
satin brass, center-mount



a.

b.



- a.** metropolis suspension, 48",
satin black, direct-mount
- b.** metropolis wall sconce, 48",
satin black, direct-mount
- c.** thin surface mount, 36 segment,
3.5" stand-offs, black oxide, direct-mount
- d.** thin shared task lamp, 24" segments,
x2, custom 27" stand-offs, black oxide






a.

a. thin multiples dyad, 24" segment
satin brass, direct-mount.


**LIGHTING
SYSTEMS**

THIN SYSTEM
UNIVERSE
METROPOLIS
AXIS
THE FLUTES
LOVE ME NOT

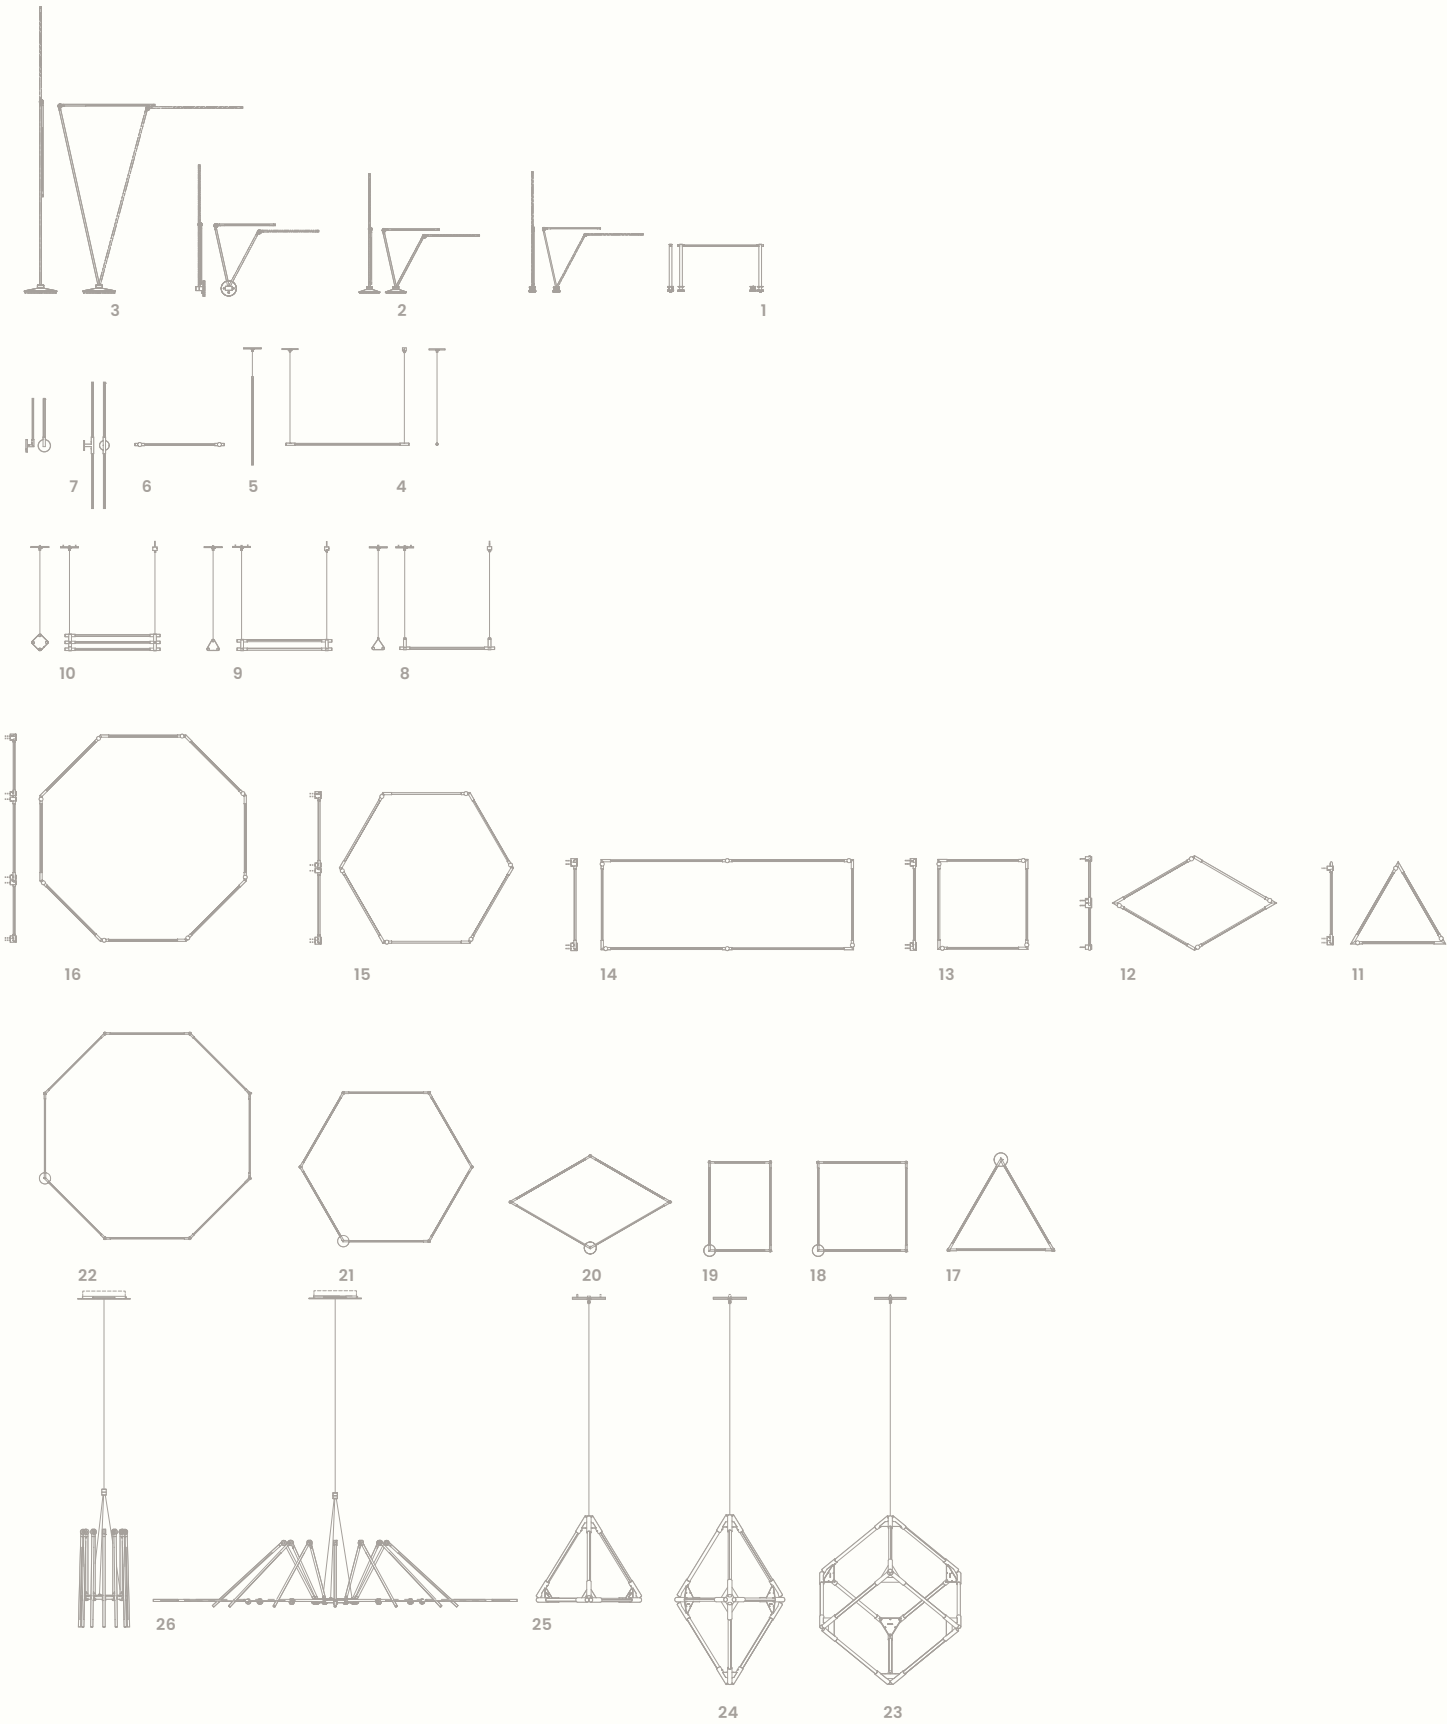

THIN SYSTEM

| | |
|--|----|
| THIN SHARED TASK LAMP | 1 |
| THIN TASK LAMPS | 2 |
| THIN FLOOR LAMP | 3 |
| THIN SUSPENSION | 4 |
| THIN VERTICAL SUSPENSION | 5 |
| THIN SURFACE MOUNT | 6 |
| THIN FLOAT SCONCES | 7 |
| THIN MULTIPLES DYAD | 8 |
| THIN MULTIPLES TRIAD | 9 |
| THIN MULTIPLES TETRAD | 10 |
| THIN PRIMARIES SURFACE MOUNT TRIANGLE | 11 |
| THIN PRIMARIES SURFACE MOUNT RHOMBUS | 12 |
| THIN PRIMARIES SURFACE MOUNT SQUARE | 13 |
| THIN PRIMARIES SURFACE MOUNT RECTANGLE | 14 |
| THIN PRIMARIES SURFACE MOUNT HEXAGON | 15 |
| THIN PRIMARIES SURFACE MOUNT OCTAGON | 16 |
| THIN PRIMARIES SUSPENDED TRIANGLE | 17 |
| THIN PRIMARIES SUSPENDED SQUARE | 18 |
| THIN PRIMARIES SUSPENDED RECTANGLE | 19 |
| THIN PRIMARIES SUSPENDED RHOMBUS | 20 |
| THIN PRIMARIES SUSPENDED HEXAGON | 21 |
| THIN PRIMARIES SUSPENDED OCTAGON | 22 |
| THIN SOLIDS CUBE | 23 |
| THIN SOLIDS TETRAHEDRON | 24 |
| THIN SOLIDS DIAMOND | 25 |
| THIN CHANDELIER | 26 |

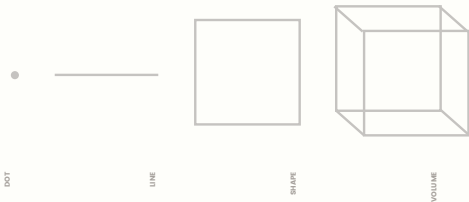

THIN

TASK LAMP

FLOOR LAMP



DIMENSIONS

Standard - 40 In Extended
Tall - 50 In Extended

WATTAGE & LUMENS

Standard - 6W, 0-600LM
Tall - 7W, 0-850LM
Floor - 7W, 0-730LM

LIGHT TEMPERATURE

3000K

LIGHT QUALITY

90CRI

MATERIALS

Brass, Cast Iron, Clear PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS

cUL, UL, CE

MOUNTING

Cast Iron Base, Wall-Mount, Desk-Inset

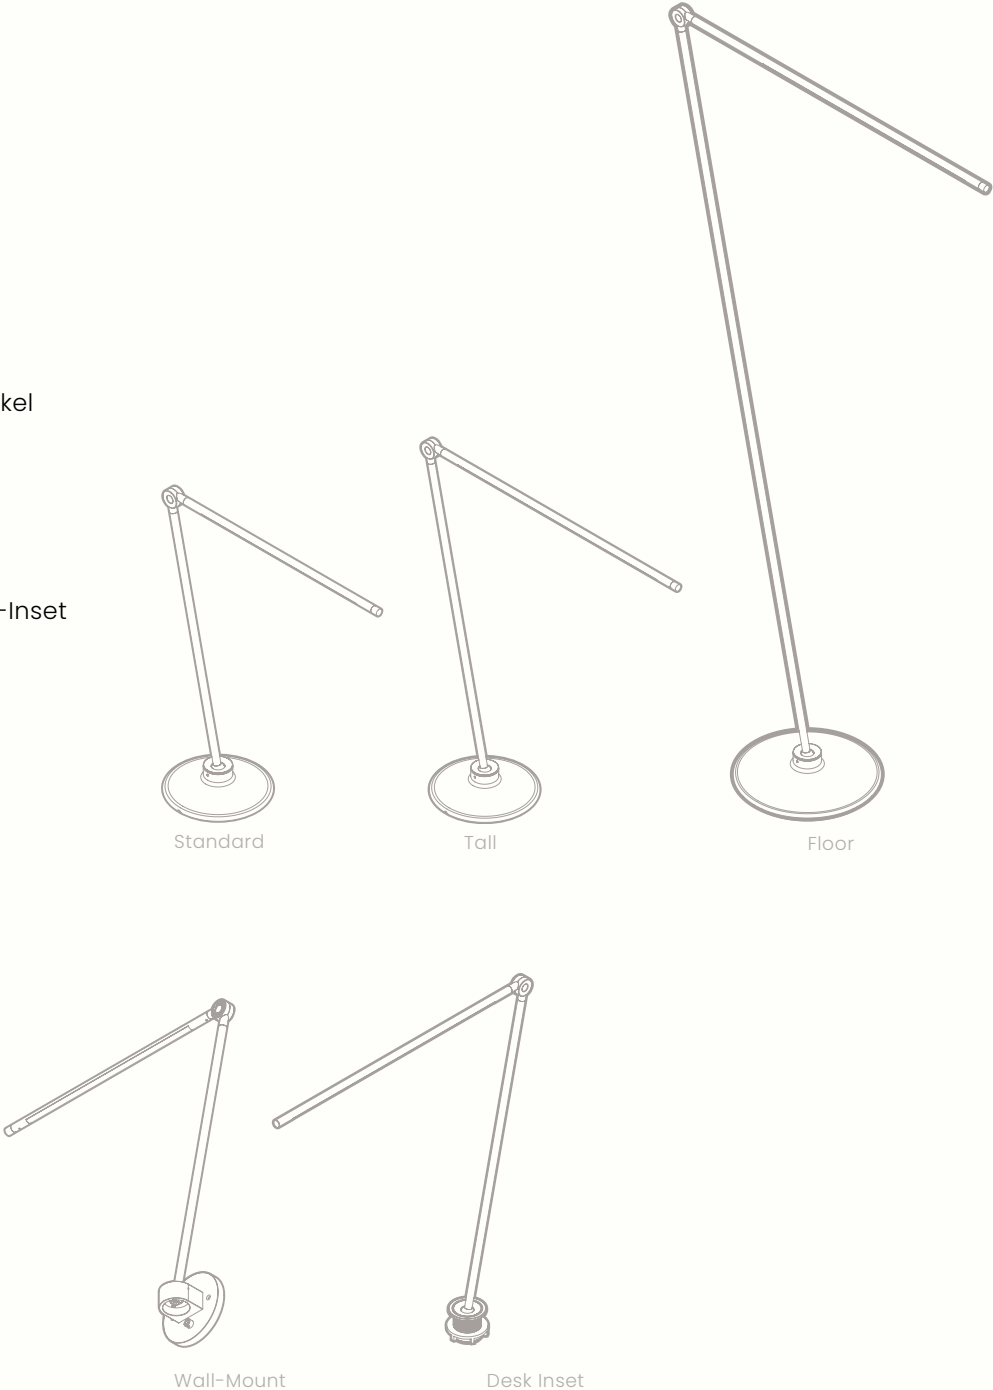



thin task lamp
thin floor lamp
satin brass



thin shared task lamp, 36" segments, x2,
satin brass



SHARED TASK LAMP

DIMENSIONS

24 In or 36 In segments

19 In tall

EXTENDABLE LENGTHS

Up to 9Ft, 3 connected segments

WATTAGE & LUMENS

24 In - 6.8W, 0-600LM per segment

36 In - 9.6W, 0-920LM per segment

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

POWER ACCESSORIESGround Control Toggle Switch,
Dimmer Knob, Dimmer Dial,
Double Usb Port & Power Outlet**CERTIFICATIONS**


CE, cUL, UL, Title 24, DAMP Rated

MOUNTING


Table-Top Mounted

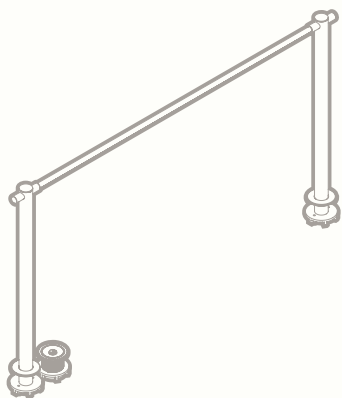


36", 1 segment

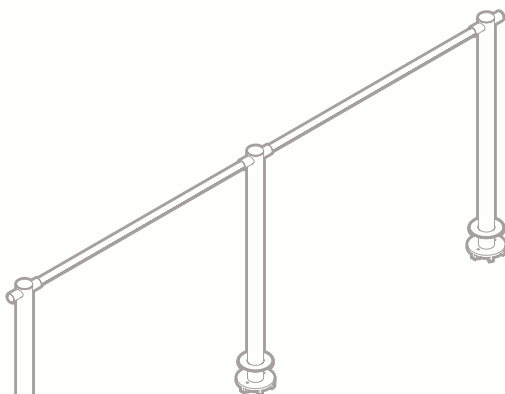

24", 2 segments



24", 1 segment

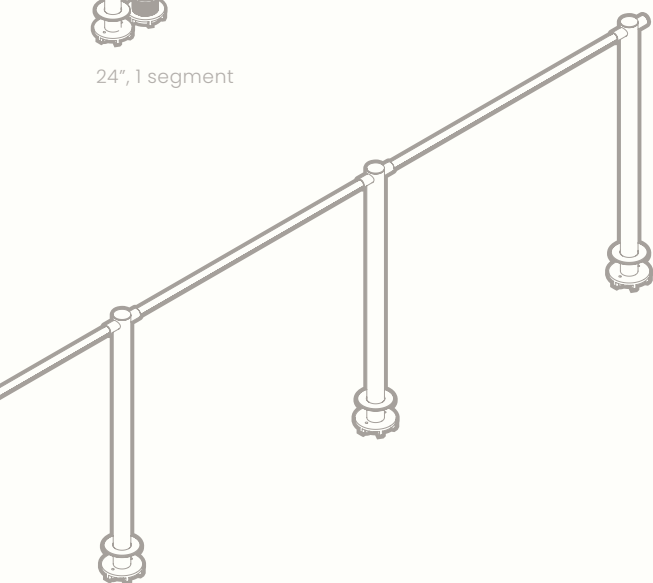

24" 3 segments

α.



b.



a. thin task lamp,
desk inset detail

b. thin task lamp,
hinge detail







thin vertical suspension, 36",
1 segment, black oxide



thin suspension, 24",
satin brass, direct-mount

THIN SUSPENSION VERTICAL SUSPENSION

UL cUL CE FC DAMP RATED

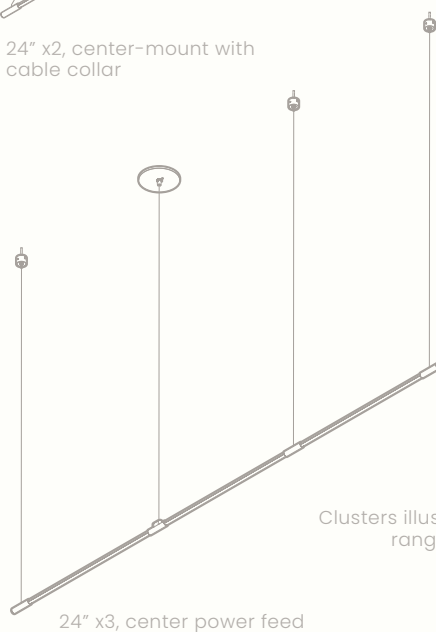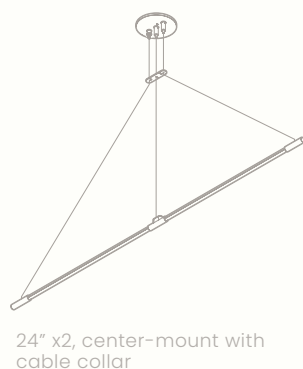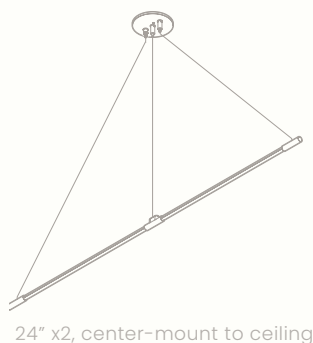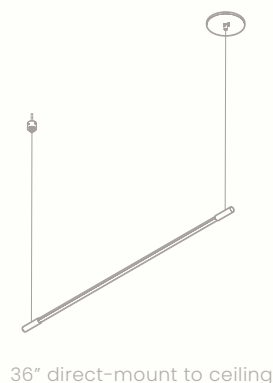

Clusters illustrated with same length segments, ranging lengths available upon request.

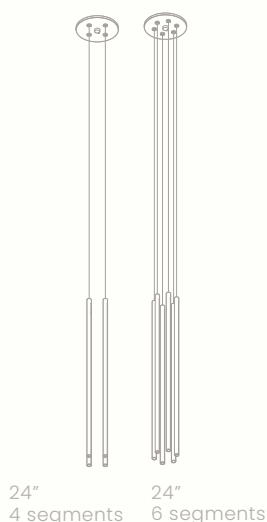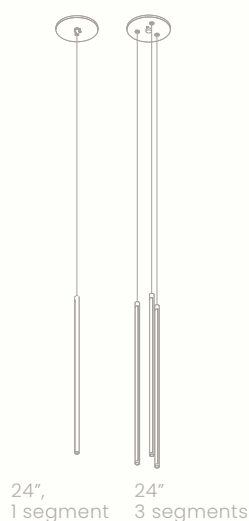

DIMENSIONS - SUSPENSION

24 In or 36 In segment lengths

DIMENSIONS - VERTICAL SUSPENSION

24 In, 36 In or 48 In segment lengths.

Diverse segments combinations per clusters available upon request

EXTENDABLE LENGTHS

Up to 27 Ft total on 96W Driver

Longer lengths available

WATTAGE & LUMENS - SUSPENSION

24 In - 6.8W, 0-600LM per segment

36 In - 9.6W, 0-920LM per segment

WATTAGE & LUMENS - VERTICAL SUSPENSION

24 In - 6.8W, 0-600 LM per segment

36 In - 9.6 W, 0-920 LM per segment

48 In - 13.6W, 0-1227 LM per segment

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES

Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS

CE, cUL, UL, Title 24, DAMP Rated

MOUNTING

Direct-Mount To Ceiling, Center Power Feed, Center-Mount With Cable Collar,



thin surface mount, 24" segments, x3,
7" stand-offs, satin brass

**DIMENSIONS**

24 In or 36 In segment lengths

STAND OFF HEIGHTS

1.75 In (45MM), 3.5 In (90MM), 7 In (180MM)

EXTENDABLE LENGTHS

Up to 27 Ft total on 96W Driver

WATTAGE & LUMENS

24 In - 6.8W, 0-600LM per segment

36 In - 9.6W, 0-920LM per segment

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES

Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS

CE, cUL, UL, Title 24, DAMP Rated

MOUNTING


Direct-Mount To Surface




24", 1.75" stand offs




24", 3.5" stand offs



24", 7" stand offs

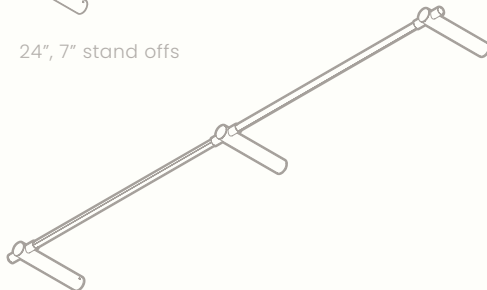

24" x2, 7" stand offs

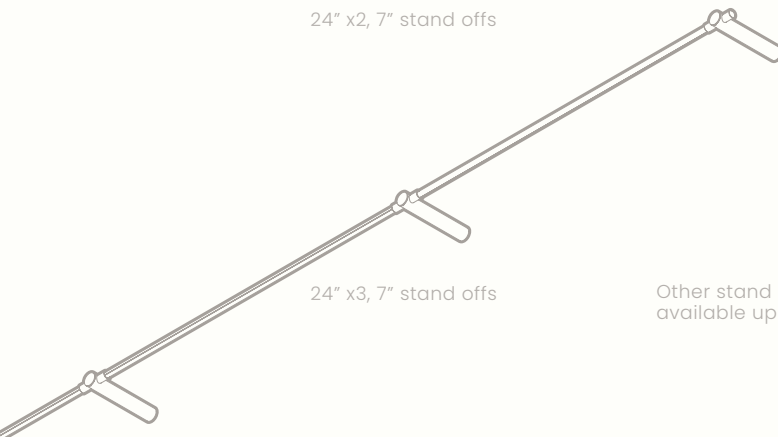

24" x3, 7" stand offs

Other stand off and segment length combinations available upon request.

THIN FLOAT

SINGLE FLOAT SCONCE

RETRO FLOAT SCONCE

UL cUL CE FC DAMP RATED

DIMENSIONS - SINGLE FLOAT

12 In, 18 In or 24 In Segment Lengths

DIMENSIONS - RETRO FLOAT

24 In or 36 In segment lengths

WATTAGE & LUMENS - SINGLE FLOAT

18 In - 5.1W, 0-450LM

24 In - 6.8W, 0-600LM

WATTAGE & LUMENS - RETRO FLOAT

24 In - 6.8W, 0-600LM

36 In - 9.6W, 0-920LM

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid brass, PMMA

FINISHES


Satin Brass, Satin Nickel, Black Oxide

CERTIFICATIONS


CE, cUL, UL, TITLE 24, DAMP Rated

MOUNTING


Direct-Mount To Surface

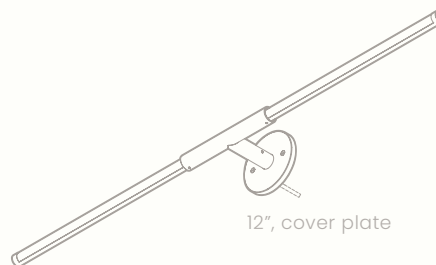


12", cover plate

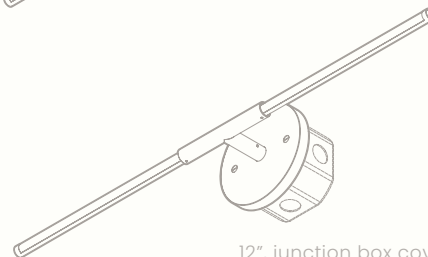

12", junction box cover plate

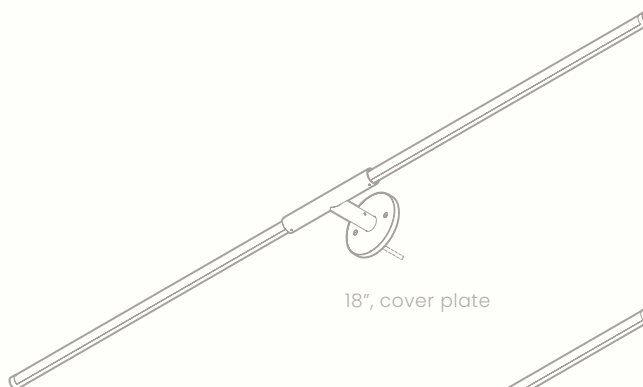

18", cover plate

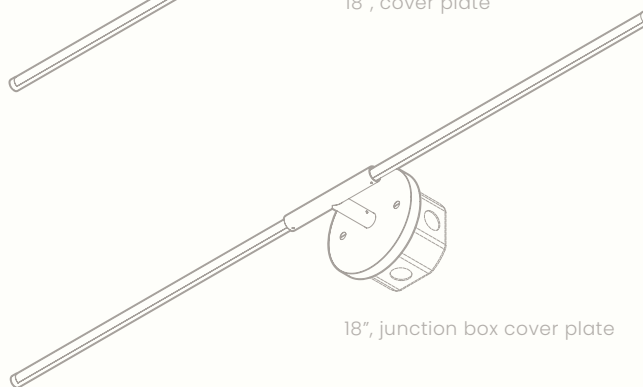

18", junction box cover plate

fixture can be installed vertically or horizontally.




24", cover plate



24", junction box cover plate




18", cover plate



18", junction box cover plate



12", cover plate



12", junction box cover plate



thin single float sconce, 24",
black oxide, cover plate

thin retro float sconce, 18",
black oxide, cover plate



7" stand-off

3.5" stand-off

1.75" stand-off



a.

b.

a. thin vertical suspension,
24" and 36" segments, x3, satin brass, direct-mount

b. thin suspension, 36" segments, x2,
satin brass, direct-mount




a. thin dyad horizontal, 36",
black oxide, direct-mount

b. thin dyad vertical, 36",
satin nickel, direct-mount


THIN MULTIPLES




DYAD




Dyad Horizontal, 24",
direct-mount to ceiling




Dyad Horizontal, 24",
center-mount to ceiling




Dyad Vertical, 24",
direct-mount to ceiling

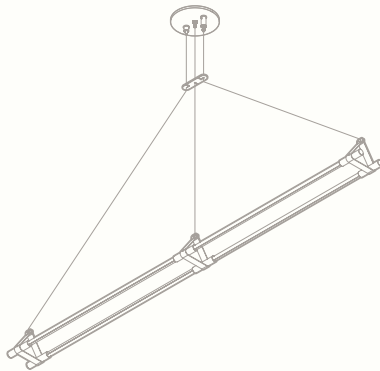

Dyad Horizontal, 24" x2,
center-mount with cable collar

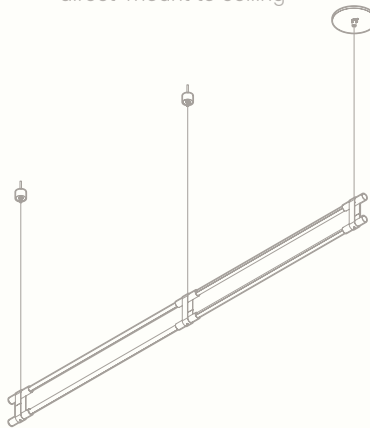

Dyad Vertical, 24" x2,
direct-mount



Dyad Horizontal, 36" x2,
direct-mount to ceiling

DIMENSIONS

24 In or 36 In segment lengths

STYLE OPTIONS

Horizontal or Vertical

EXTENDABLE LENGTHS

Up to 12 Ft total on 96W Driver, Longer Lengths Available

WATTAGE & LUMENS

24 In - 13.6W, 0-1200LM Per Section

36 In - 19.2W, 0-1840LM Per Section

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES

Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS

CE, cUL, UL, Title 24, DAMP Rated

MOUNTING

Direct-Mount To Ceiling, Center-Mount With Cable Collar, Center-Mount Without Cable Collar, Mini Mount



THIN MULTIPLES TRIAD



DIMENSIONS

24 In or 36 In segment lengths

EXTENDABLE LENGTHS

Up to 8 Ft total On 96W Driver, Longer Lengths

Available

WATTAGE & LUMENS

24 In - 20.4W, 0-1800LM Per Section

36 In - 28.8W, 0-2760LM Per Section

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS

CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Ceiling, Center-Mount With Cable Collar, Center-Mount Without Cable Collar, Mini Mount

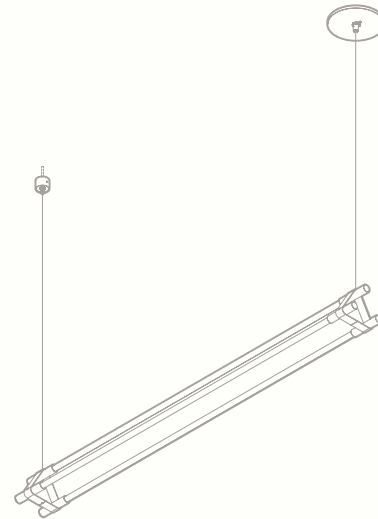


Triad horizontal, 36",
direct-mount to ceiling



Triad vertical, 36",
direct-mount to ceiling

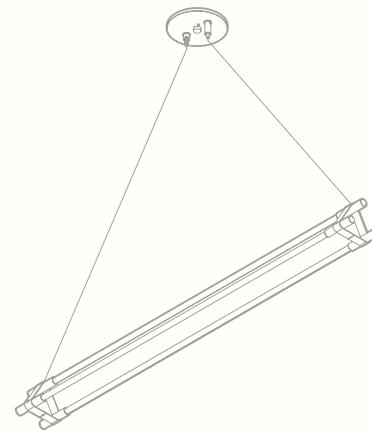

Triad horizontal, 36",
center-mount to ceiling

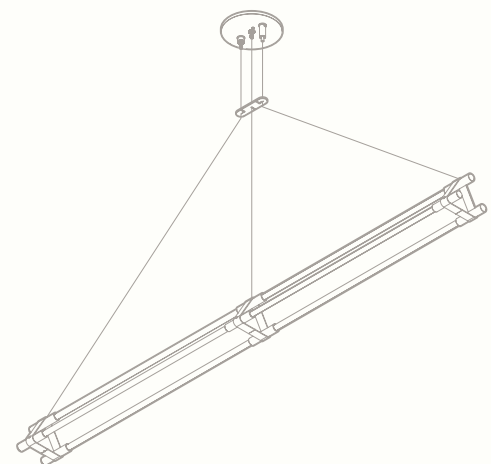

Triad horizontal, 24"x2
center-mount with cable collar





a. thin triad horizontal, 36",
black oxide, direct-mount

b. thin triad vertical, 36",
black oxide, direct-mount



b.

a.

a. thin tetrad horizontal, 36",
satin nickel, direct-mount

b. thin tetrad vertical, 36",
satin brass, direct-mount

THIN MULTIPLES



TETRAD

DIMENSIONS

24 In or 36 In options

EXTENDABLE LENGTHS

Up to 6 Ft total on 96W Driver, Longer Lengths Available

WATTAGE & LUMENS

24 In - 27.2W, 0-2400LM Per Section

36 In - 38.4W, 0-3680LM Per Section

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Ceiling, Center-Mount With Cable Collar, Center-Mount Without Cable Collar, Mini Mount

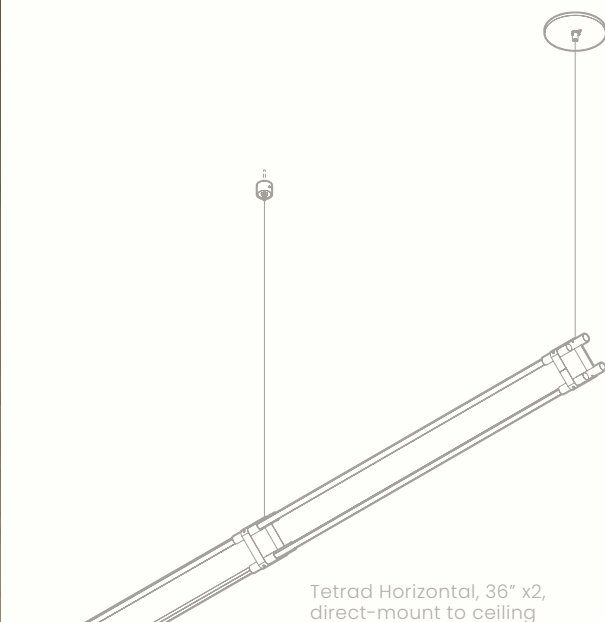

Tetrad Horizontal, 36" x2,
direct-mount to ceiling

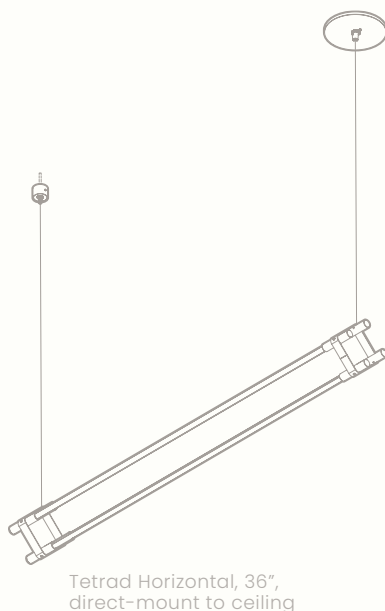

Tetrad Horizontal, 36",
direct-mount to ceiling

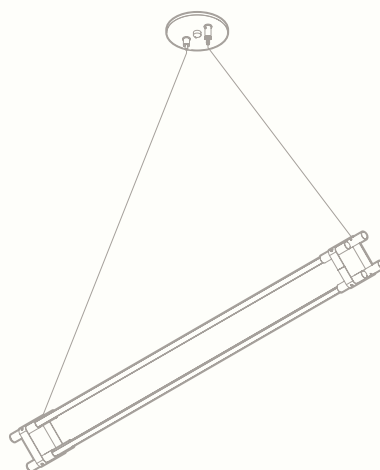

Tetrad Horizontal, 36",
center-mount



Tetrad Vertical, 36",
direct-mount to ceiling



a.



b.



c.



d.




- a.** thin multiples dyad vertical, 36",
satin brass, direct-mount
- b.** thin multiples dyad horizontal, 36",
satin brass, direct-mount
- c.** thin multiples triad horizontal, 36",
black oxide, direct-mount
- d.** thin multiples tetrad horizontal, 36",
satin nickel, direct-mount



a.

thin triad horizontal, 36",
satin brass, direct-mount

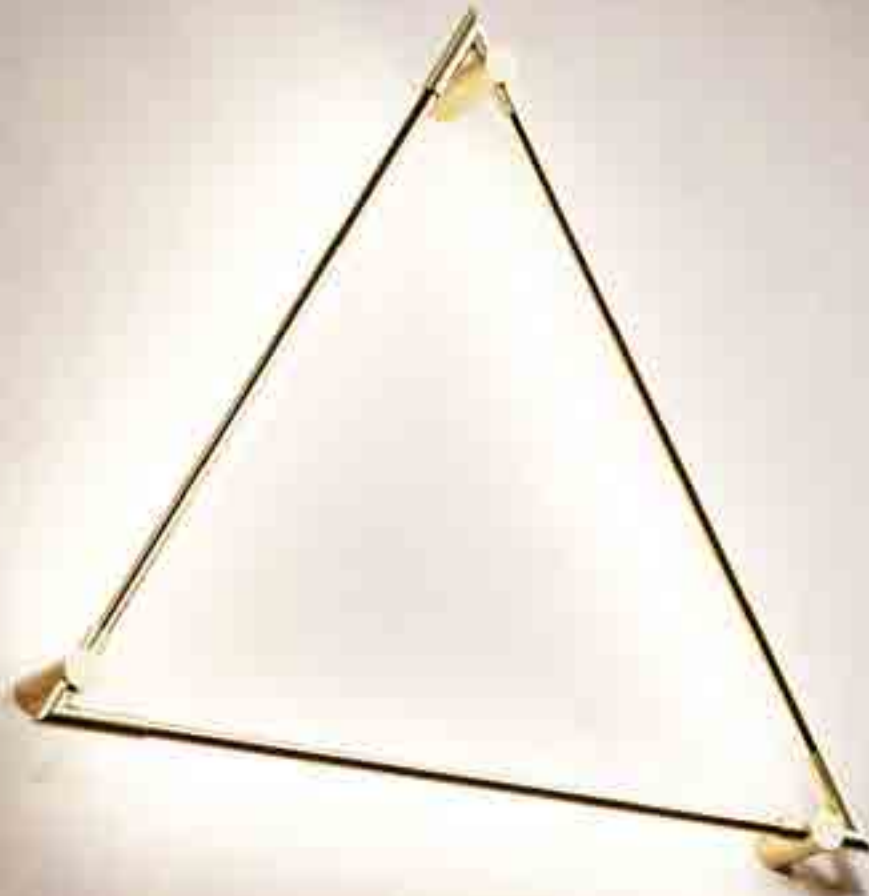

thin primaries triangle, 24" segments,
3.5" stand offs, satin brass, direct-mount

THIN PRIMARIES

SURFACE MOUNT TRIANGLE

UL cUL CE FC DAMP RATED

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Wall-Mounted

SEGMENT QUANTITY

3 Segments total

STAND OFFS

1.75 In

3.5 In

7 In

WATTAGE & LUMENS

24 In - 20.4W, 0-1800LM total

36 In - 28.8W, 0-2760LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Surface

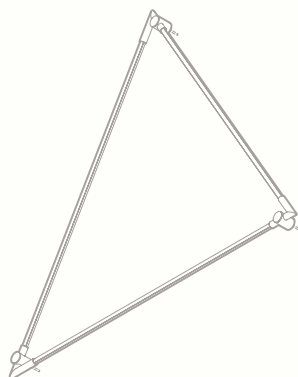

36", 1.75" standoff

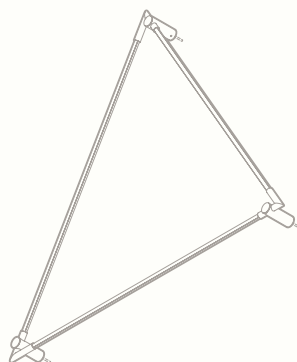

36", 3.5" standoff

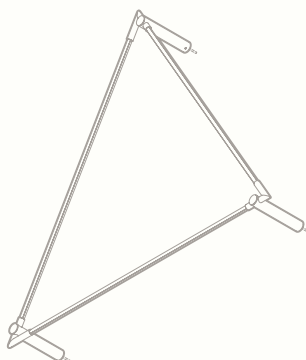

36", 7" standoff



THIN PRIMARIES

SURFACE MOUNT SQUARE

UL cUL CE FCC ΔDAMP RATED

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Wall-Mounted

SEGMENT QUANTITY

4 Segments total

STAND OFFS

1.75 In

3.5 In

7 In

WATTAGE & LUMENS

24 In - 27.2W, 0-2400LM total

36 In - 38.4W, 0-3680LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Surface

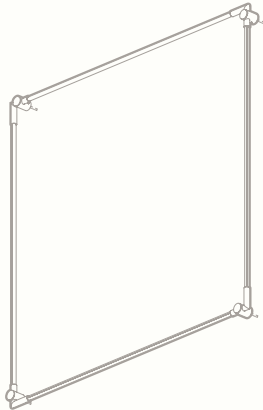

36", 1.75" standoff

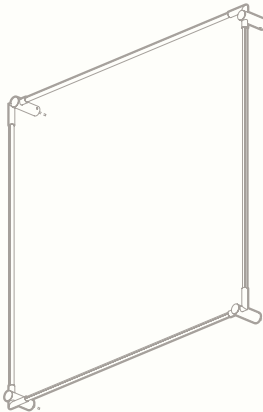


36", 3.5" standoff

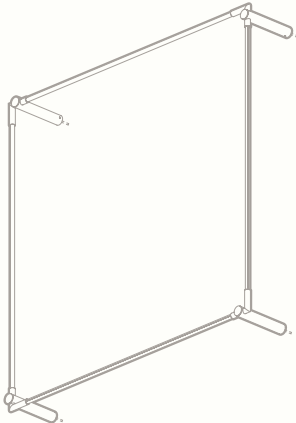

36", 7" standoff



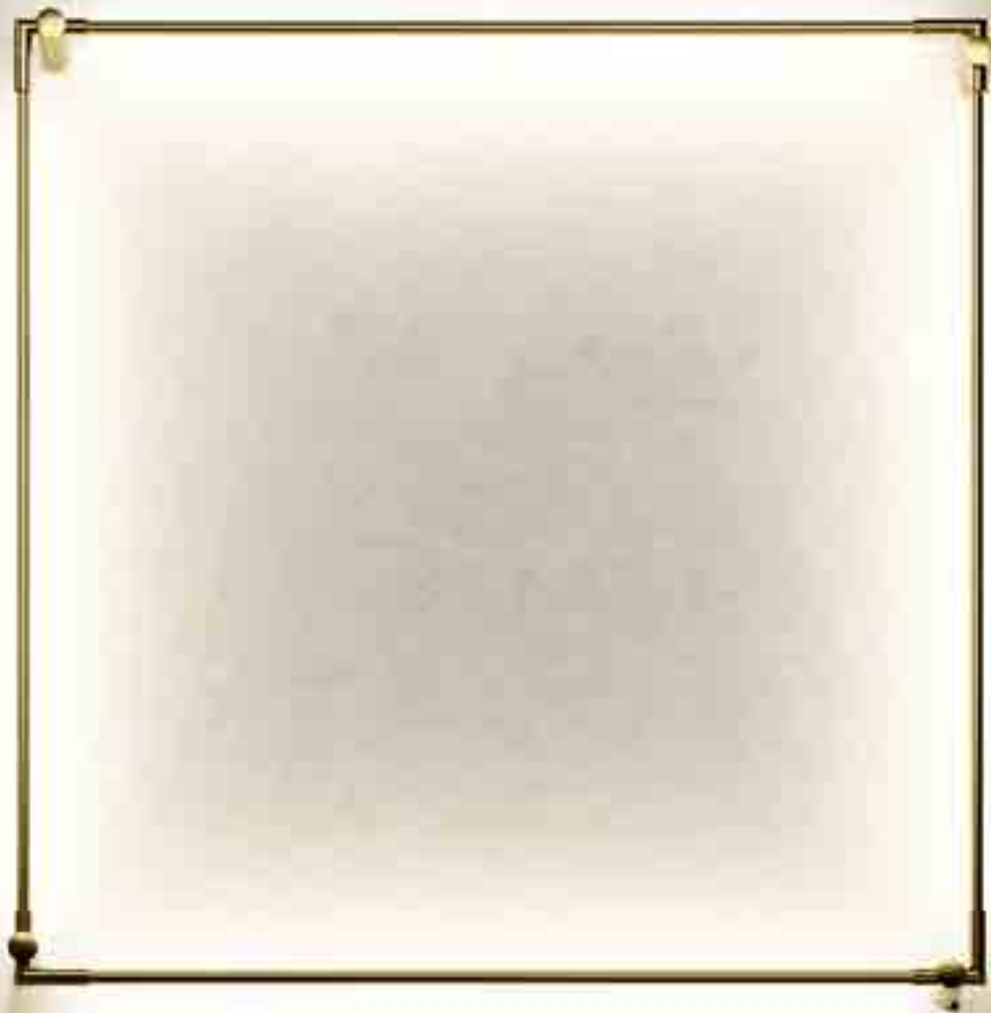

thin primaries square, 36" segments,
3.5" stand offs, satin brass, direct-mount



thin primaries rhombus, 24" segments,
1.75" stand offs, black oxide, direct-mount

THIN PRIMARIES

SURFACE MOUNT

RHOMBUS

UL cUL CE FCC Δ DAMP RATED

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Wall-Mounted

SEGMENT QUANTITY

4 Segments total

STAND OFFS

1.75 In

3.5 In

7 In

WATTAGE & LUMENS

24 In - 27.2W, 0-2400LM total

36 In - 38.4W, 0-3680LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES




Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS

CE, cUL, UL Title 24, DAMP Rated

MOUNTING

Direct-Mount To Surface

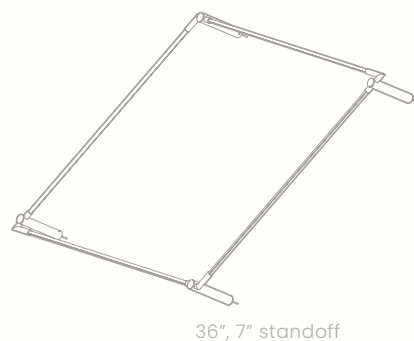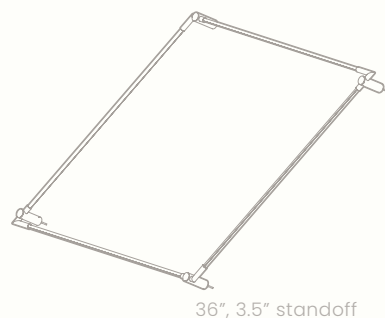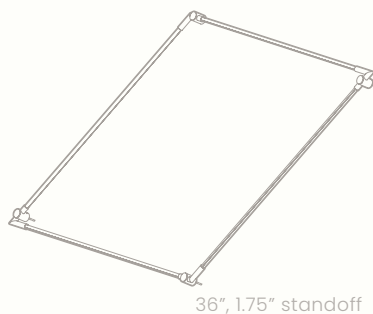

THIN PRIMARIES

SURFACE MOUNT

RECTANGLE

UL cUL CE FCC ΔDAMP RATED

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Wall-Mounted

SEGMENT QUANTITY

4 Segments total (Customizable)

STAND OFFS

1.75 In

3.5 In

7 In

WATTAGE & LUMENS

24 In - 6.8W, 0-600LM per segment

36 In - 9.6W, 0-920LM per segment

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Surface

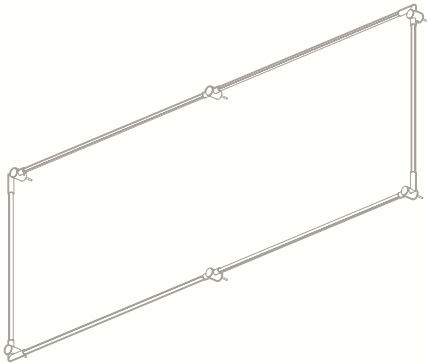

24"x72", 1.75" standoff

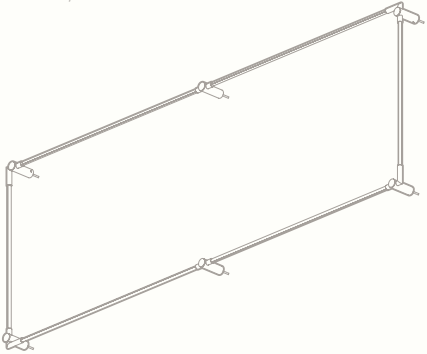


24"x72", 3.5" standoff

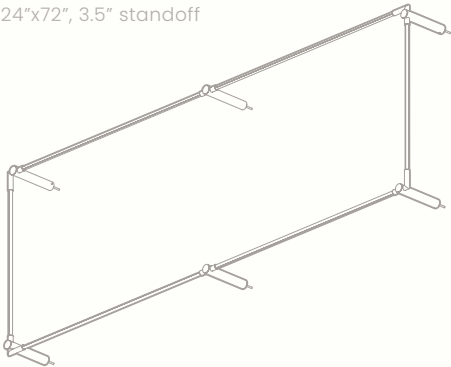


24"x72", 7" standoff



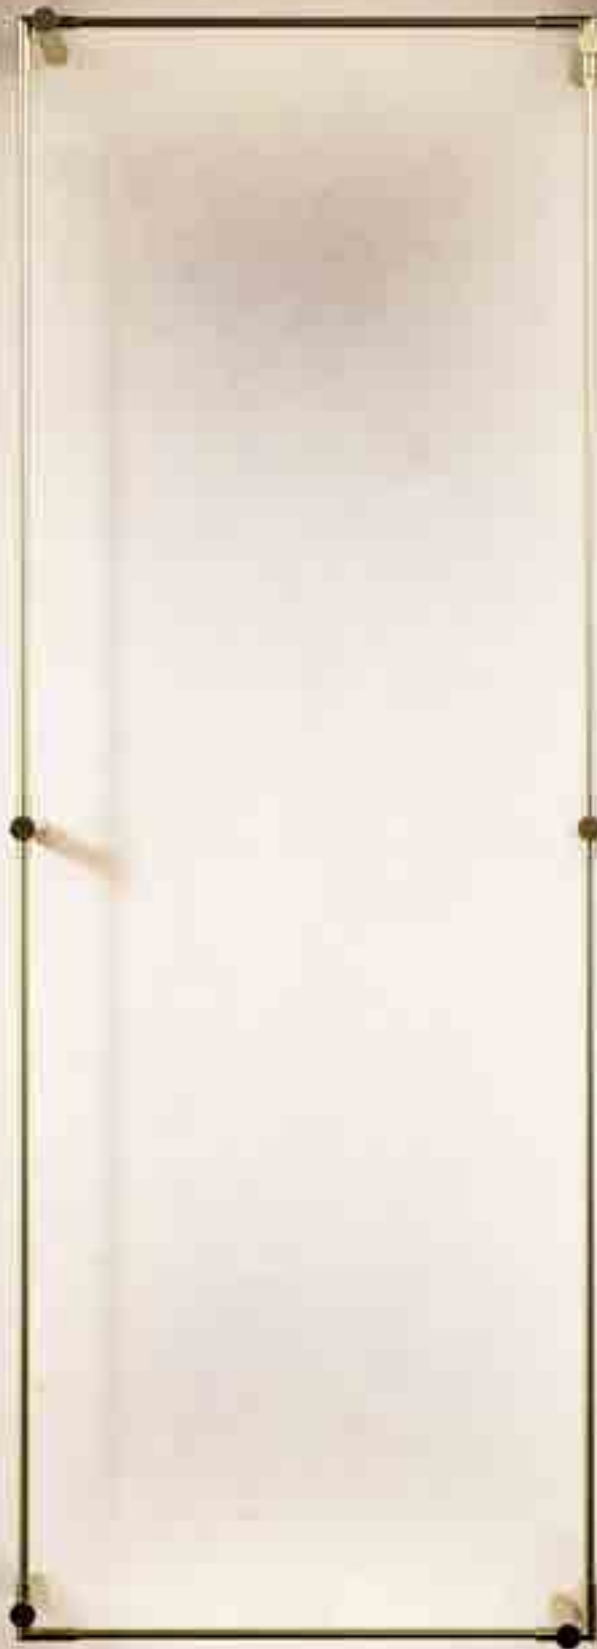

thin primaries rectangle, 24"x72",
3.5" stand offs, satin brass, direct-mount

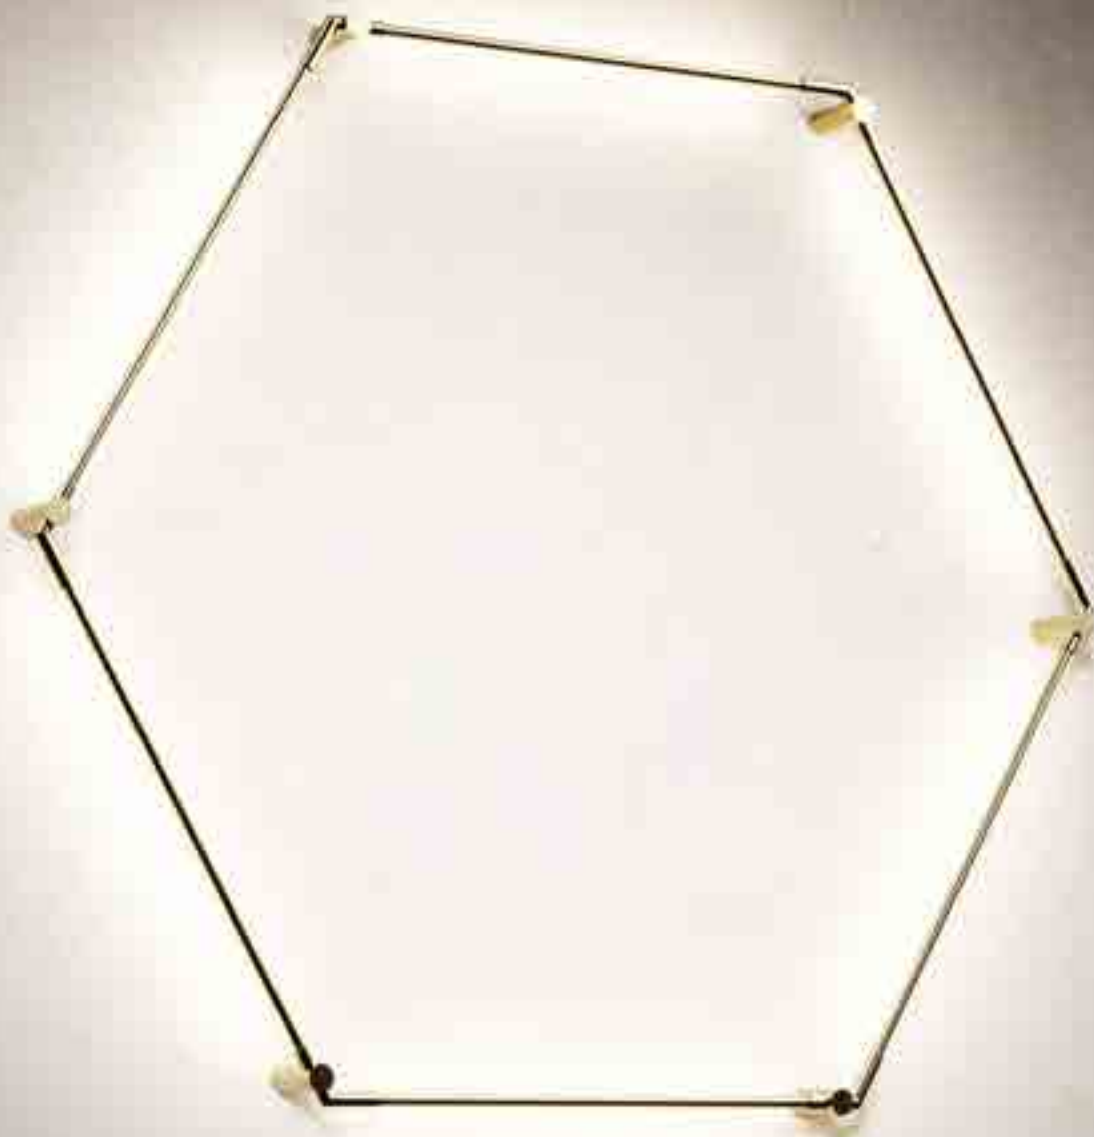

thin primaries hexagon, 24" segments,
3.5" stand offs, satin brass, direct-mount

THIN PRIMARIES

SURFACE MOUNT

HEXAGON

UL cUL CE FC DAMP RATED

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Wall-Mounted

SEGMENT QUANTITY

6 Segments total

STAND OFFS

1.75 In

3.5 In

7 In

WATTAGE & LUMENS

24 In - 40.8W, 0-3600LM total

36 In - 57.6W, 0-5500LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Surface

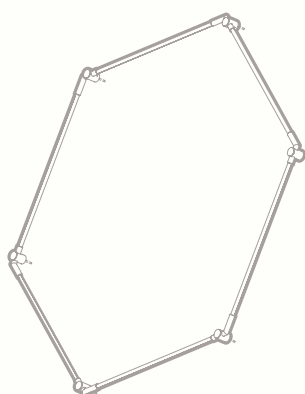

36", 1.75" standoff

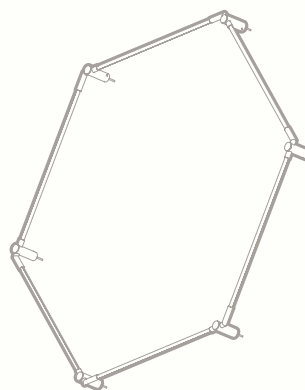

36", 3.5" standoff

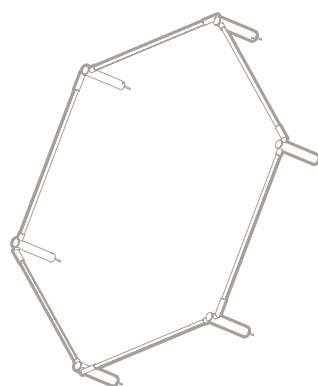

36", 7" standoff



THIN PRIMARIES

SURFACE MOUNT

OCTAGON

UL cUL CE FCC ΔDAMP RATED

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Wall-Mounted

SEGMENT QUANTITY

8 Segments total

STAND OFFS

1.75 In

3.5 In

7 In

WATTAGE & LUMENS

24 In - 54.4W, 0-4800LM total

36 In - 76.8W, 0-7400LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Surface

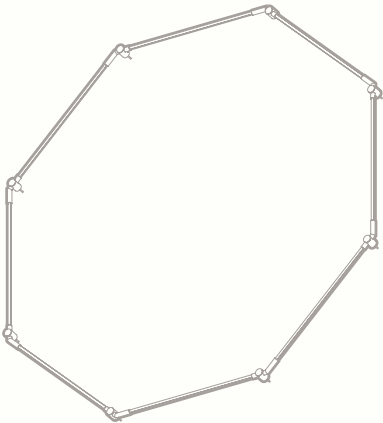

36", 1.75" standoff

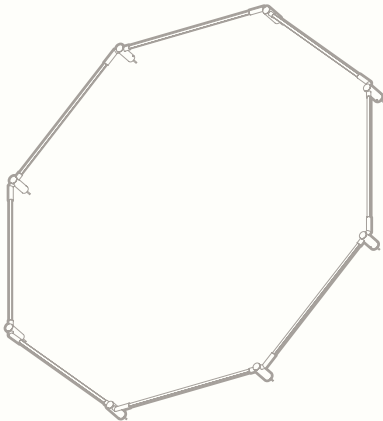

36", 3.5" standoff

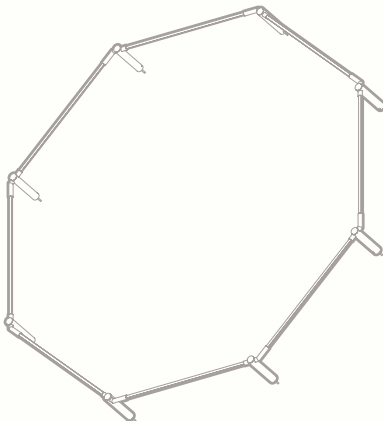

36", 7" standoff





thin primaries octagon, 24" segments,
7" stand offs, satin nickel, direct-mount



thin primaries triangle, 24" segments,
x3



THIN PRIMARIES

SUSPENDED TRIANGLE

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Suspended

SEGMENT QUANTITY

3 Segments total

WATTAGE & LUMENS

24 In - 20.4W, 0-1800LM total

36 In - 28.8W, 0-2760LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Ceiling, Center-Mount,
Center-Mount With Cable Collar, Mini Mount

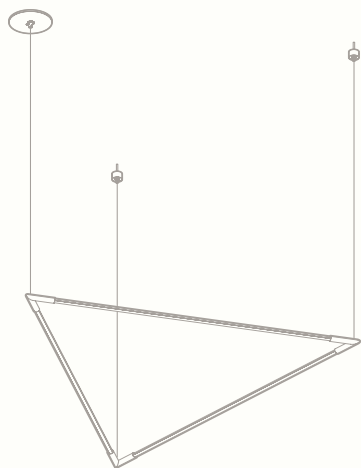

36", direct-mount to ceiling

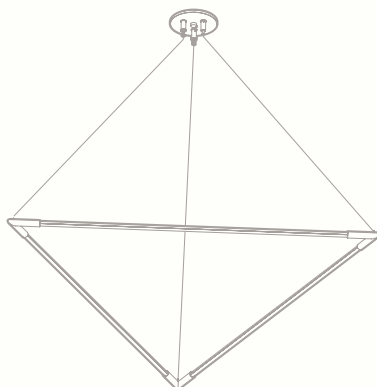

36", center-mount

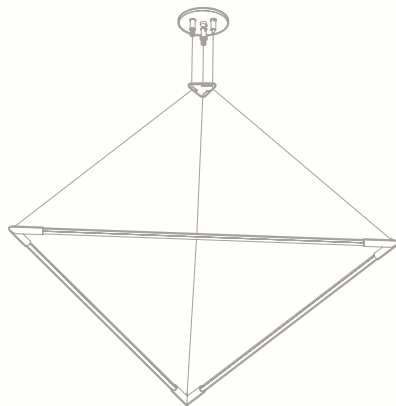

36", center-mount with
cable collar



THIN PRIMARIES

SUSPENDED SQUARE

UL cUL CE FCC DAMP RATED

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Suspended

SEGMENT QUANTITY

4 Segments total

WATTAGE & LUMENS

24 In - 27.2W, 0-2400LM total

36 In - 38.4W, 0-3680LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Ceiling, Center-Mount,
Center-Mount With Cable Collar, Mini Mount

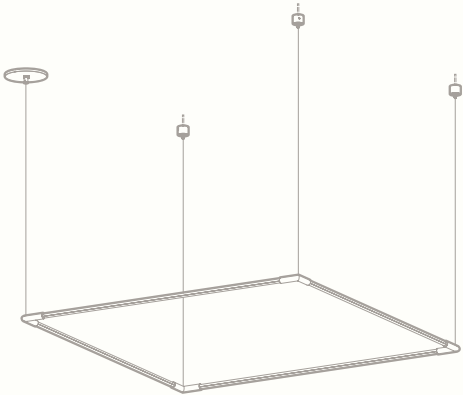

36", direct-mount
to ceiling

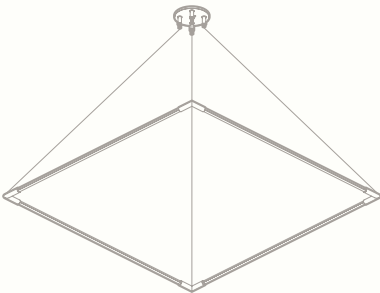

36", center-mount

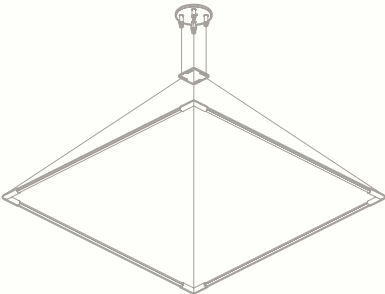

36", center-mount with
cable collar





thin primaries square, 24" segments, x4,
satin brass, center-mount



thin primaries rhombus, 24" segments, x4,
satin brass, center-mount

UL cUL CE FC ΔDAMP RATED

THIN PRIMARIES SUSPENDED RHOMBUS

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Suspended

SEGMENT QUANTITY

4 Segments total

WATTAGE & LUMENS

24 In - 27.2W, 0-2400LM total

36 In - 38.4W, 0-3680LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Ceiling, Center-Mount,
Center-Mount With Cable Collar, Mini Mount

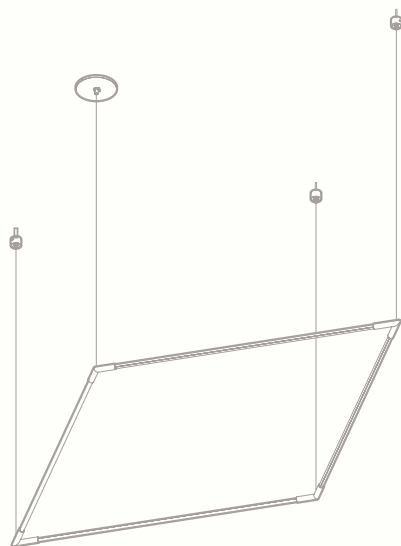

36", direct-mount to ceiling

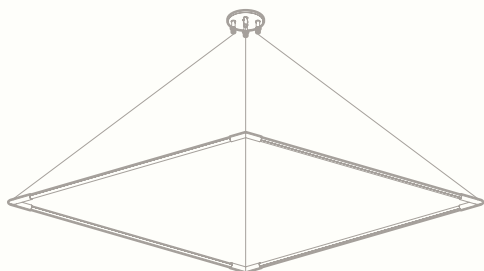

36", center-mount

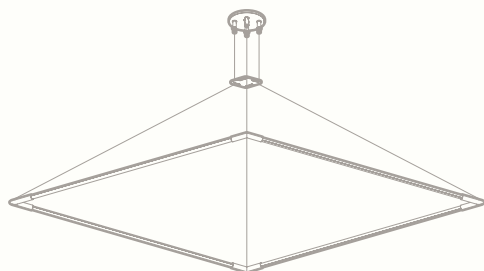

36", center-mount with cable collar



THIN PRIMARIES

SUSPENDED RECTANGLE

UL cUL CE FCC ΔDAMP RATED

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Suspended

SEGMENT QUANTITY

4 or 6 Segments total

WATTAGE & LUMENS

24 In - 6.8W, 0-600LM per segment

36 In - 9.6W, 0-920LM per segment

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Ceiling, Center-Mount,
Center-Mount With Cable Collar, Mini Mount

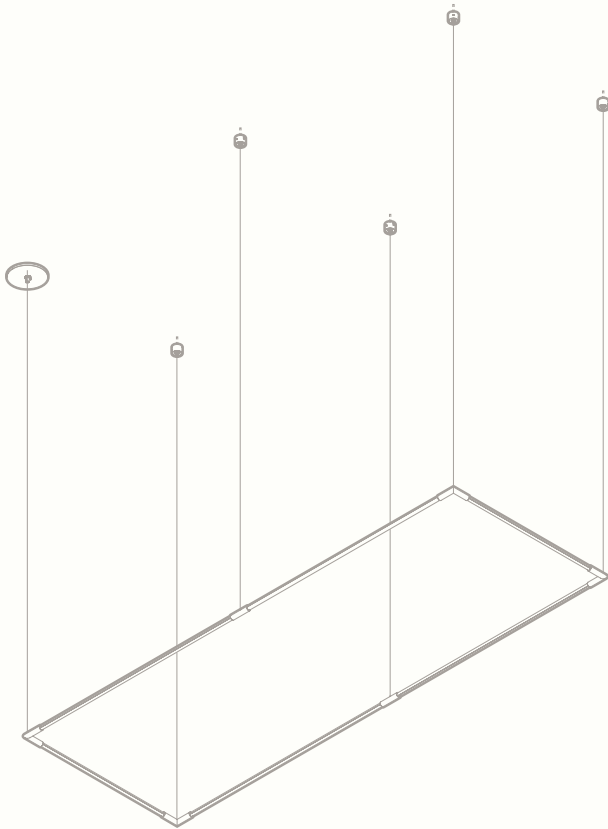


24x72", direct-mount to ceiling

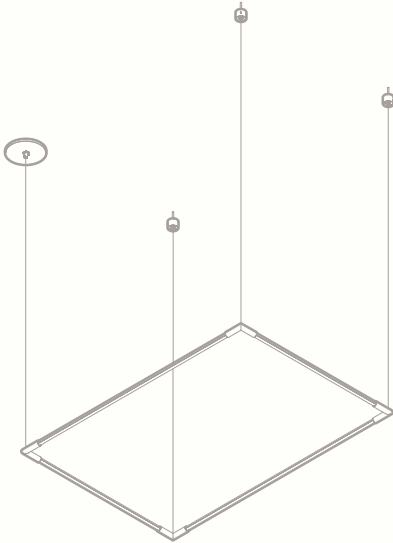

24x36", direct-mount to ceiling

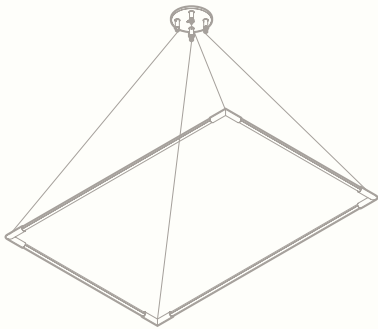

24x36", center-mount

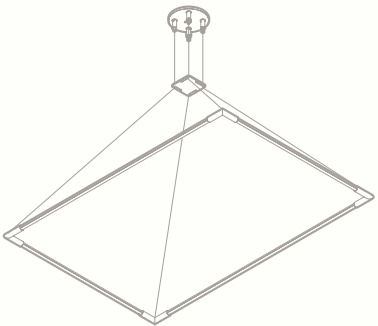

24x36", center-mount
with cable collar





thin primaries rectangle, 24"x36",
black oxide, center mount



thin primaries hexagon, 36" segments, x6,
satin nickel, center mount

UL cUL CE FC DAMP RATED

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Suspended

SEGMENT QUANTITY

6 Segments total

WATTAGE & LUMENS

24 In - 40.8W, 0-3600LM total

36 In - 57.6W, 0-5500LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS


Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

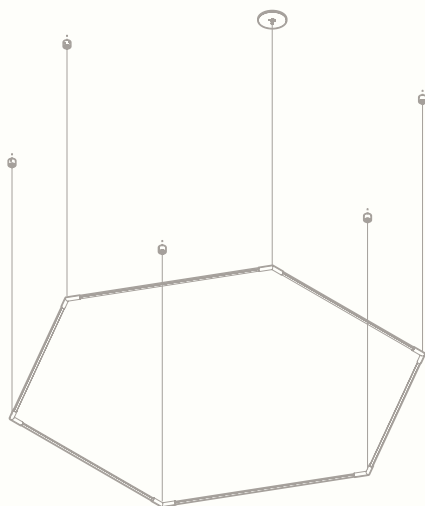MOUNTINGDirect-Mount To Ceiling, Center-Mount,
Center-Mount With Cable Collar, Mini Mount

36", direct-mount to ceiling

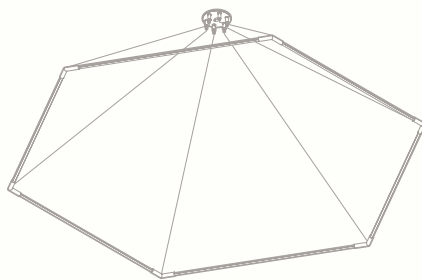

36", center-mount

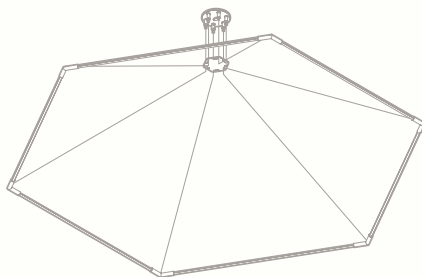36", center-mount with
cable collar

THIN PRIMARIES

SUSPENDED OCTAGON



DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Suspended

SEGMENT QUANTITY

8 Segments total

WATTAGE & LUMENS

24 In - 54.4W, 0-4800LM total

36 In - 76.8W, 0-7400LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING

Direct-Mount To Ceiling, Center-Mount, Mini Mount

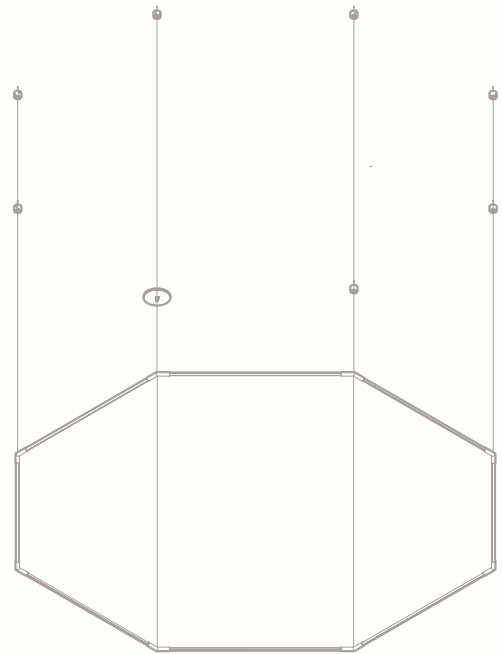

36", direct-mount to ceiling

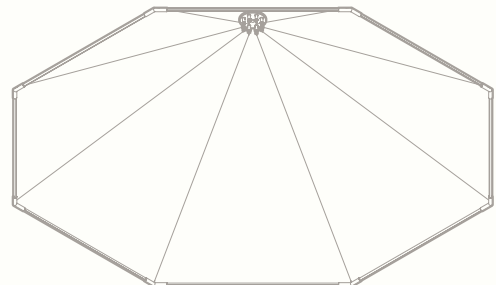

36", center-mount





thin primaries octagon, 36" segments, x8,
satin brass, center mount



- a.** thin primaries hexagon, 24" segments, satin brass, 7" stand offs, direct-mount
- b.** thin primaries hexagon, 24" segments, black oxide, 3.5" stand offs, direct-mount,
- c.** thin primaries hexagon, 24" segments, satin nickel, 1.75" stand offs, direct-mount




d.


b. thin primaries hexagon, 36" segments, x6,
satin nickel, center mount




thin solids cube, 18" segments, x12,
satin brass, direct-mount,
4 mounting points

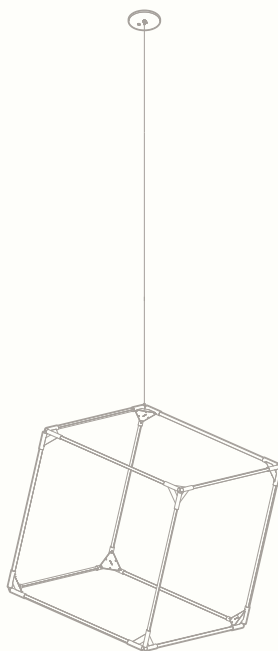


24", direct-mount to ceiling, 1 mounting point

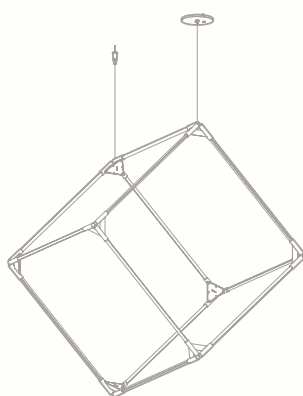


24", direct-mount to ceiling, 2 mounting points

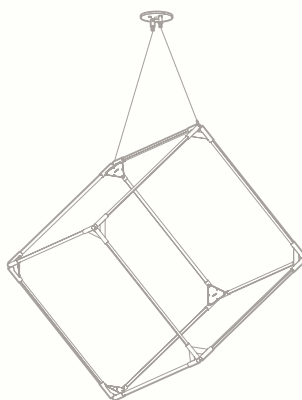

24", center-mount to canopy, 2 mounting points

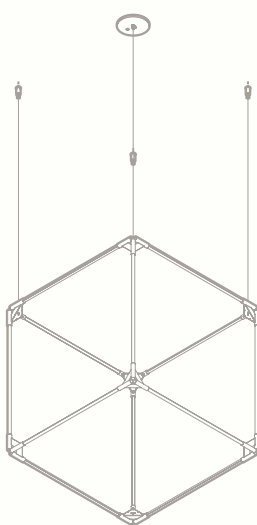

24", direct-mount to ceiling, 4 mounting points

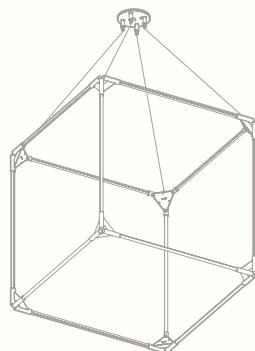

24" center-mount to canopy, 4 mounting points

DIMENSIONS

12 In, 18 In, or 24 In lengths

WATTAGE & LUMENS

12 In - 40.8W, 0-3600LM total

18 In - 61.2W, 0-5400LM total

24 In - 81.6W, 0-7200LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES

Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS

CE, cUL, UL Title 24, DAMP Rated

MOUNTING

1, 2 or 4 Mounting Points, Center-Mount,
Direct-Mount To Ceiling

THIN SOLIDS

TETRAHEDRON



DIMENSIONS

12 In, 18 In, or 24 In Lengths

WATTAGE & LUMENS

12 In - 20.4W, 0-1800LM total

18 In - 30.6W, 0-2700LM total

24 In - 40.8W, 0-3600LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES

Satin Brass, Black Oxide, Satin Nickel


CERTIFICATIONS

CE, cUL, UL Title 24, DAMP Rated


MOUNTING

1 or 3 Mounting Points, Center-Mount,


Direct-Mount To Ceiling, Mini Mount

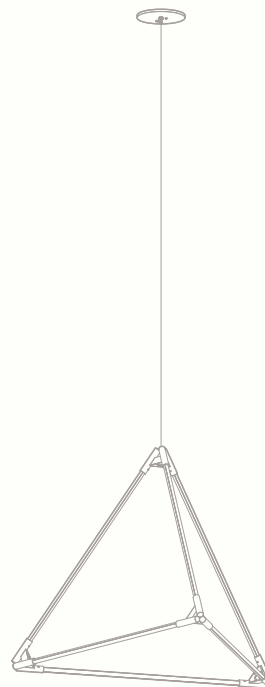

24", direct-mount to ceiling, 1 mounting point

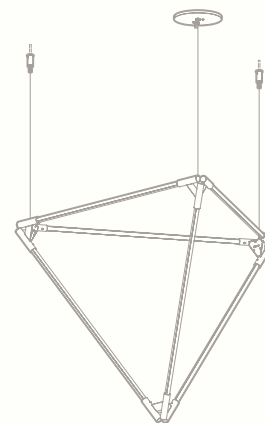


24", direct-mount to ceiling, 3 mounting points

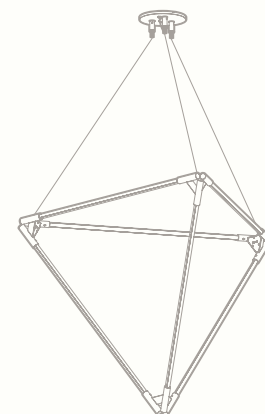

24", center-mount to ceiling, 3 mounting points



thin solids tetrahedron, 18" segments, x6,
black oxide, direct mount, 1 mounting point

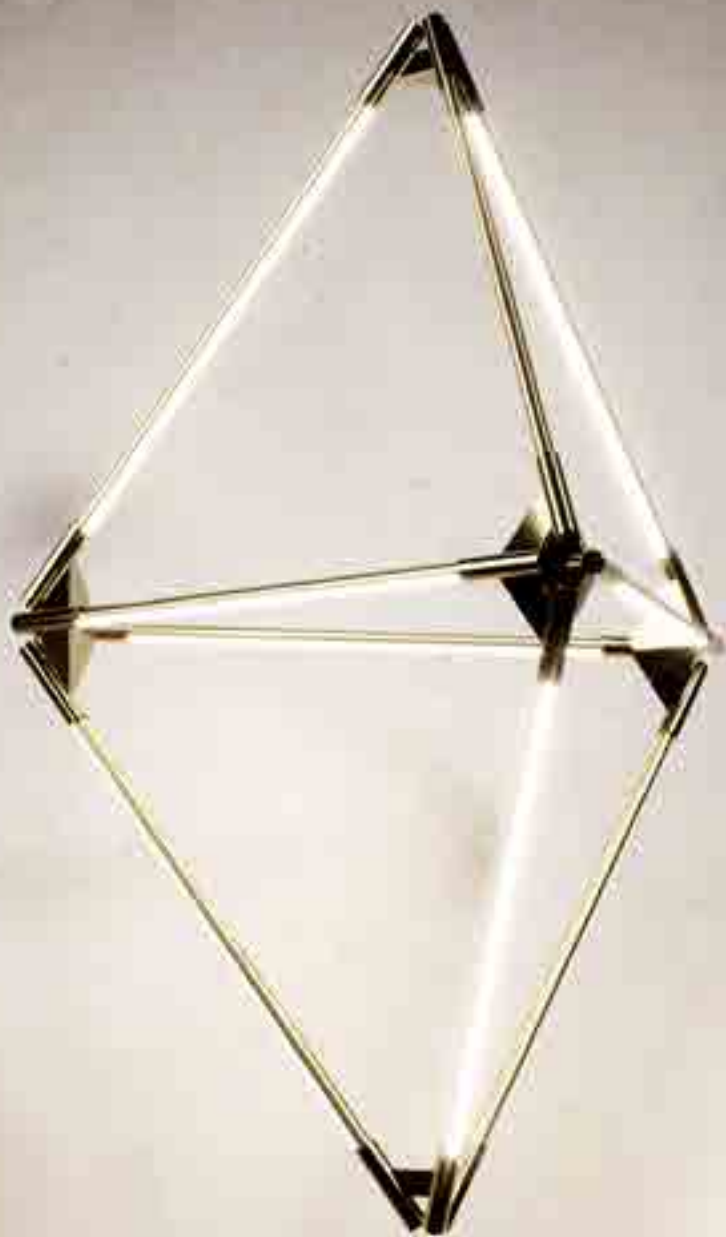

thin solids diamond, 18" segments, x9,
satin brass, direct mount, 1 mounting point

THIN SOLIDS



DIAMOND

DIMENSIONS

12 In, 18 In, or 24 In Lengths

WATTAGE & LUMENS

12 In - 30.6W, 0-2700LM total

18 In - 45.9W, 0-4050LM total

24 In - 61.2W, 0-5400LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES




Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS

CE, cUL, UL Title 24, DAMP Rated

MOUNTING

1 Mounting Point, Direct-Mount, Mini Mount

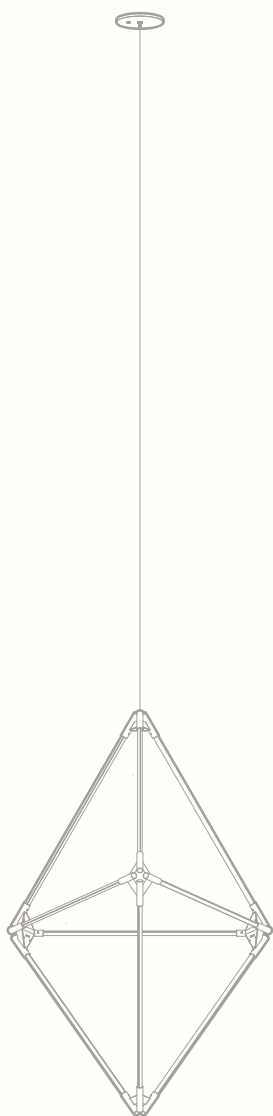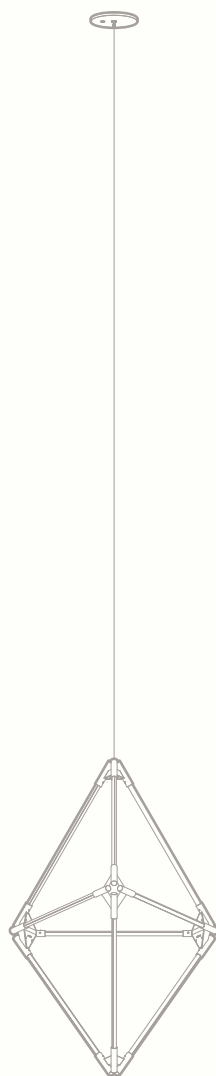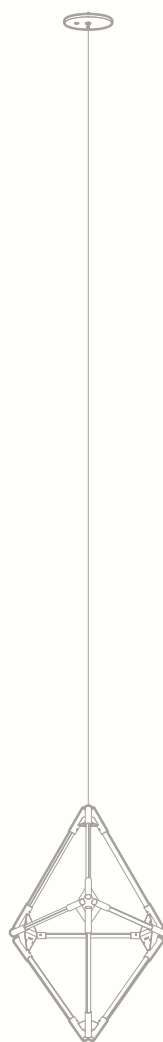24", direct-mount
to ceiling18", direct-mount
to ceiling12", direct-mount
to ceiling

THIN CHANDELIER



DIMENSIONS

Small - 87 In Ø Expanded

Large - 127 In Ø Expanded

SEGMENT QUANTITY

12 Segments total

WATTAGE & LUMENS

Small - 48W, 0-5300LM total

Large - 80W, 0-8850LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Brass, Acrylic, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS

CE, cUL, UL

MOUNTING

Direct-Mount To Ceiling

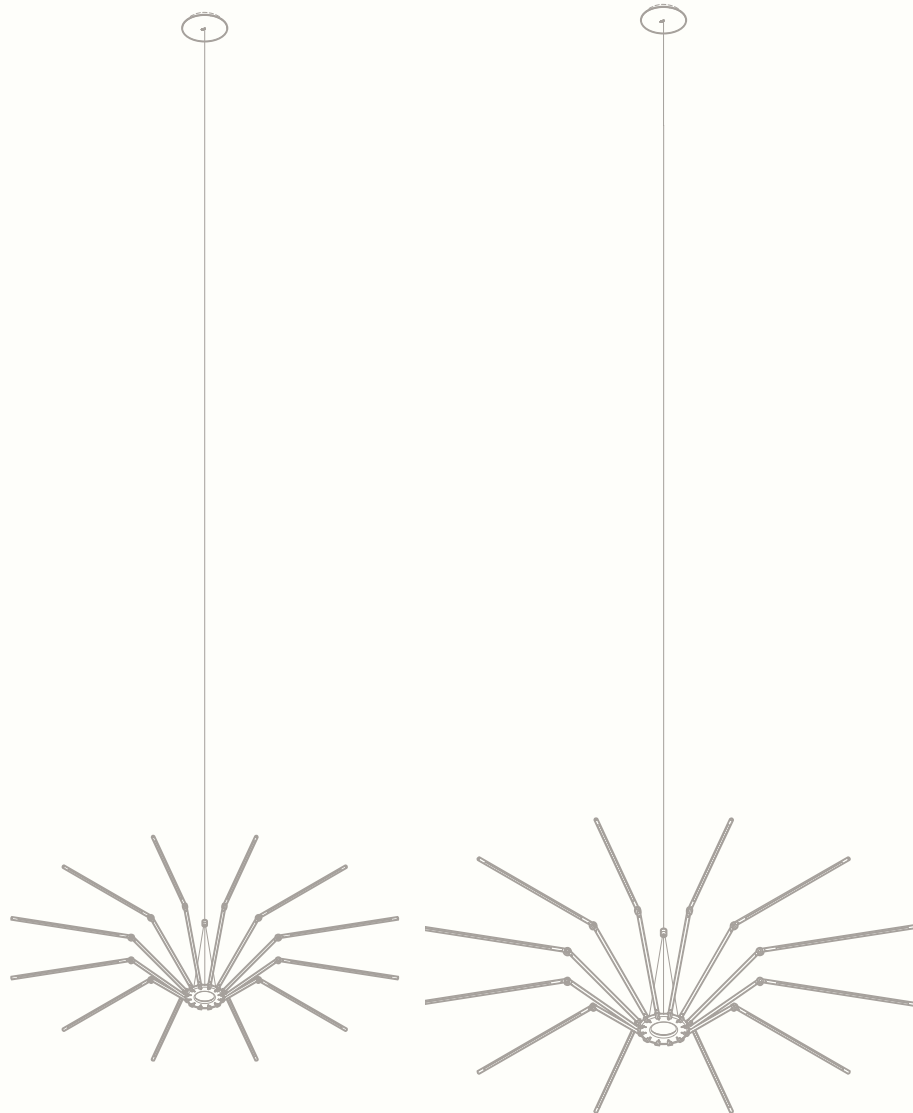

87.3" diameter, direct-mount to ceiling

126.5" diameter, direct-mount to ceiling




thin chandelier, large,
satin brass, direct-mount



thin chandelier, large,
satin brass, direct-mount



thin solids diamond, 18"
segments,

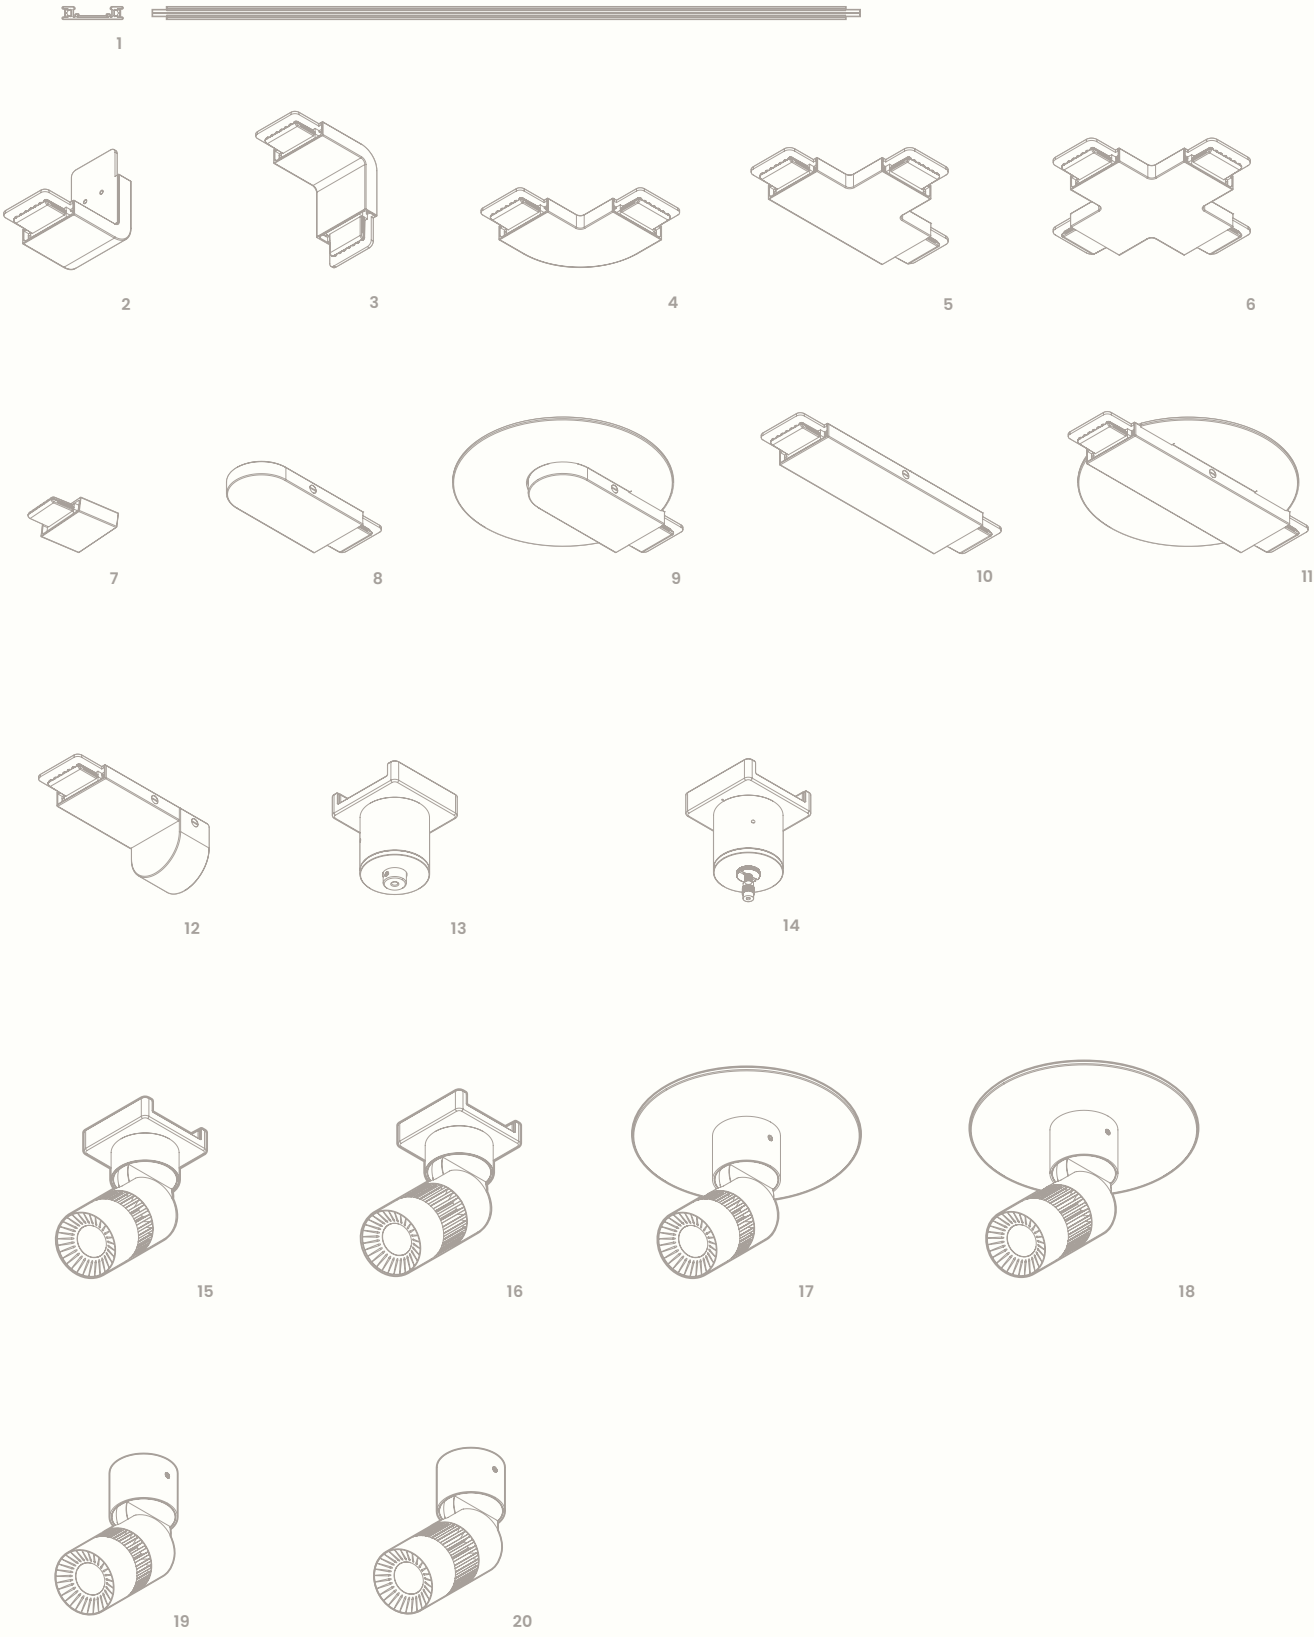

MULTIVERSE SYSTEM

| | |
|---|----|
| RIBBON | 1 |
| OUT-OF-PLANE CONNECTOR | 2 |
| IN-PLANE CONNECTOR | 3 |
| CORNER CONNECTOR | 4 |
| T CONNECTOR | 5 |
| X CONNECTOR | 6 |
| DUMMY END | 7 |
| SURFACE RIBBON END POWER FEED | 8 |
| SURFACE RIBBON END POWER FEED JUNCTION COVER | 9 |
| SURFACE RIBBON INLINE POWER FEED | 10 |
| SURFACE RIBBON INLINE POWER FEED JUNCTION COVER | 11 |
| SURFACE RIBBON END CONDUIT POWER FEED | 12 |
| RIBBON ADAPTERS POWER | 13 |
| RIBBON ADAPTERS SUSPENSION | 14 |
| SPOTLIGHT SMALL | 15 |
| SPOTLIGHT LARGE | 16 |
| MONOPOINT SMALL JUNCTION COVER | 17 |
| MONOPONIT LARGE JUNCTION COVER | 18 |
| MONOPOINT SMALL | 19 |
| MONOPONIT LARGE | 20 |
| | 21 |
| | 22 |
| | 23 |

MULTIVERSE SYSTEM AT A GLANCE

FEATURES AND BENEFITS



ULTRA-LOW PROFILE TRACK

Magnetic connection

Surface mounts to almost any material

DIMMING

2 circuits

0–10V or phase

Casambi wireless available

SPOTLIGHTS

500 or 800 LM output

Field-replaceable beam angles

21°, 37°, 50° standard

Precision-machined aluminum

Full 360° rotation and 0–90° tilt

1.5" / 38 mm dia. × 4.25" / 108 mm height

POWER SUPPLIES

24V DC

Remote and surface mounted options available

SUPERIOR LIGHT QUALITY

90+ CRI

85 LM/Watt delivered average

Flicker-free dimming to 0.1%

CONNECTORS

Inline, 90, 3-Way, 4-Way and Out-of-Plane

All standard

COLOR TEMPERATURES

2700K, 3000K, 3500K, 4000K



VOLTAGE DROP CORRECTION

150' of ribbon can be powered via a single 96W power supply
Add power supplies for longer runs with seamless continuity and
no reduction in brightness

SIMPLE INSTALLATION

Easy install clip system, field-cuttable
Junction box covers
Surface-mounted power supplies

LUMINAIRE FINISHES


High-performance coatings
Matte White, Matte Black, Satin Aluminum, Satin Brass, Custom colors

RIBBON AND CONNECTOR FINISHES


High performance coatings
Primer is field paintable
Matte White, Matte Black, Satin Aluminum, Satin Brass, Custom colors

MULTIVERSE SYSTEM OVERVIEW

VISUAL COMPONENTS GLOSSARY

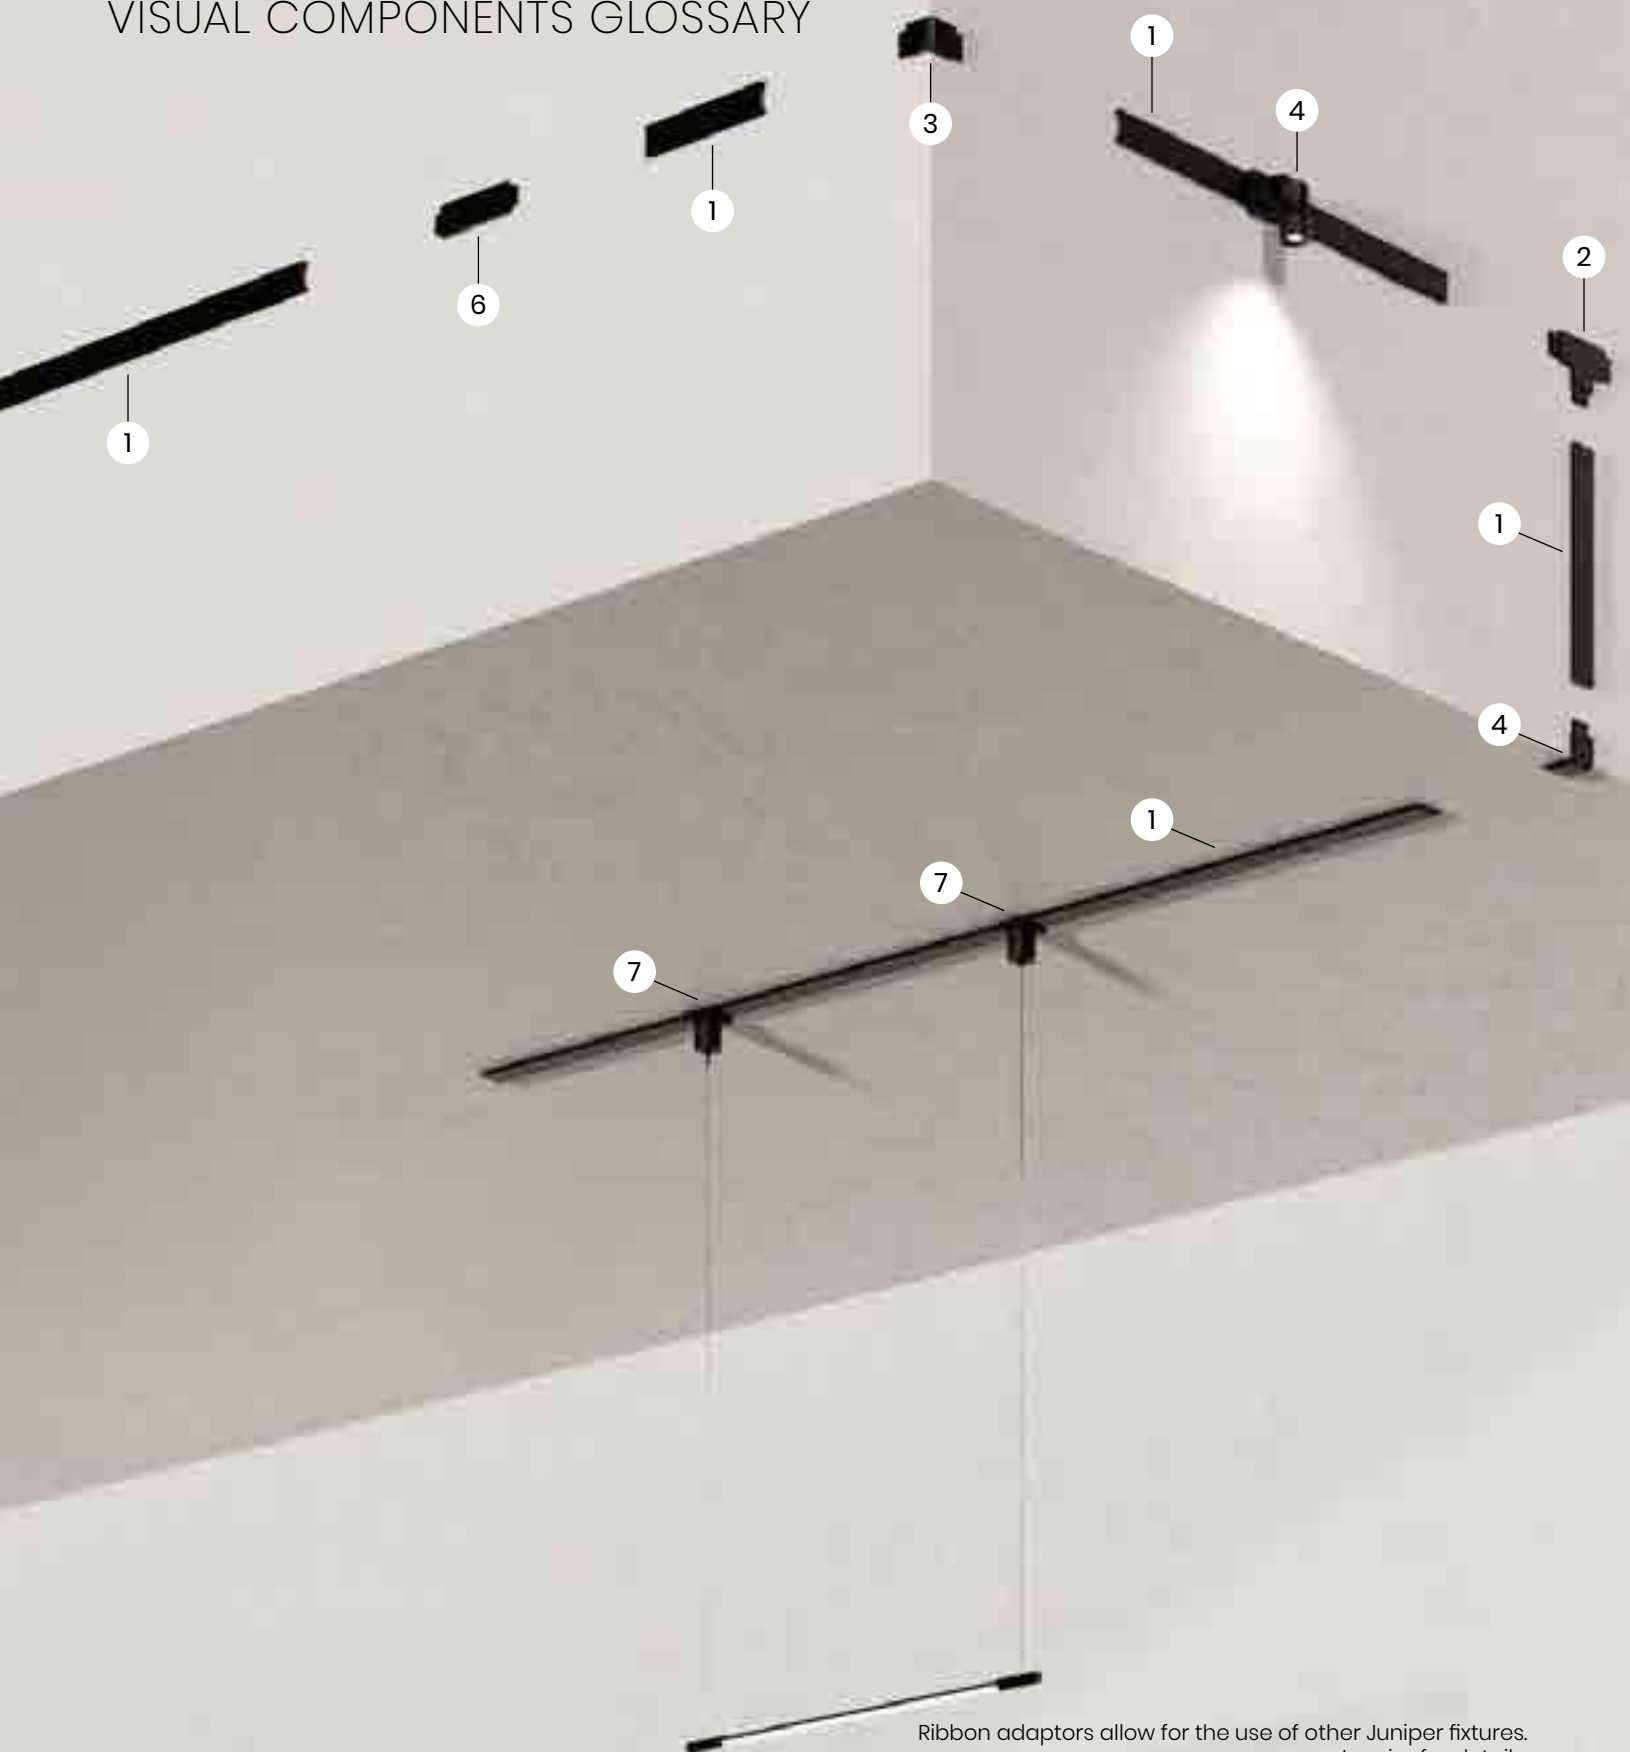


Ribbon adaptors allow for the use of other Juniper fixtures.
[Inquire for details.](#)

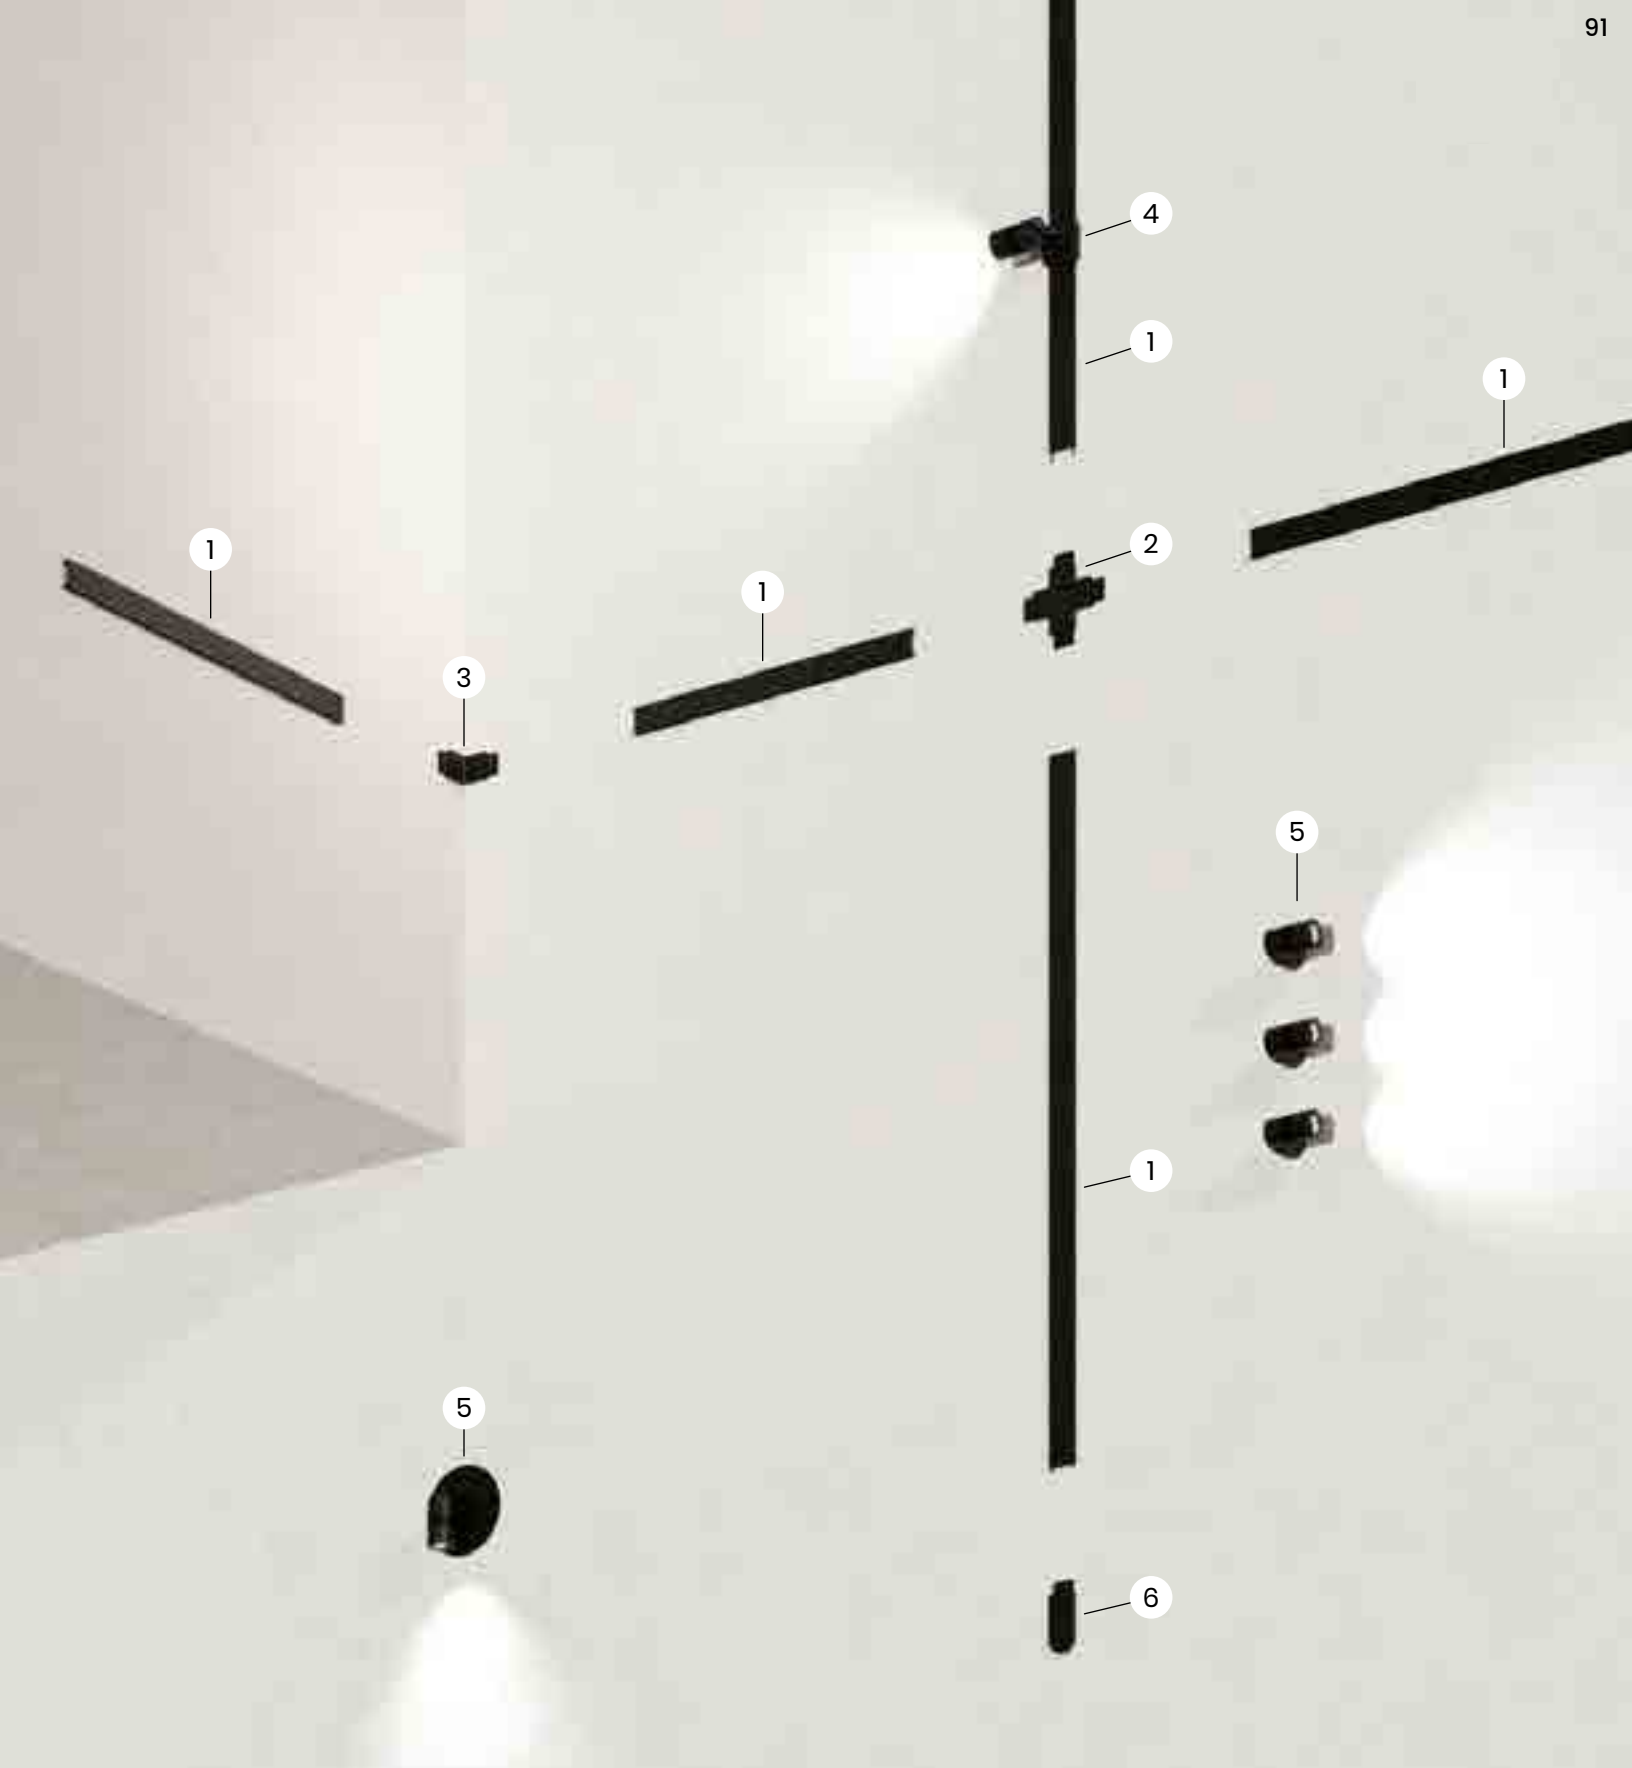

- | | | | |
|----------|---------------------------------------|----------|--|
| 1 | RIBBON | 5 | SPOTLIGHTS MONOPOINT |
| 2 | RIBBON CONNECTORS IN-PLANE | 6 | RIBBON POWER FEEDS SURFACE |
| 3 | RIBBON CONNECTORS OUT-OF-PLANE | 7 | RIBBON ADAPTORS SUSPENSION |
| 4 | SPOTLIGHTS RIBBON-MOUNTED | | POWER SUPPLIES REMOTE (NOT SHOWN) |



ribbon
matte black

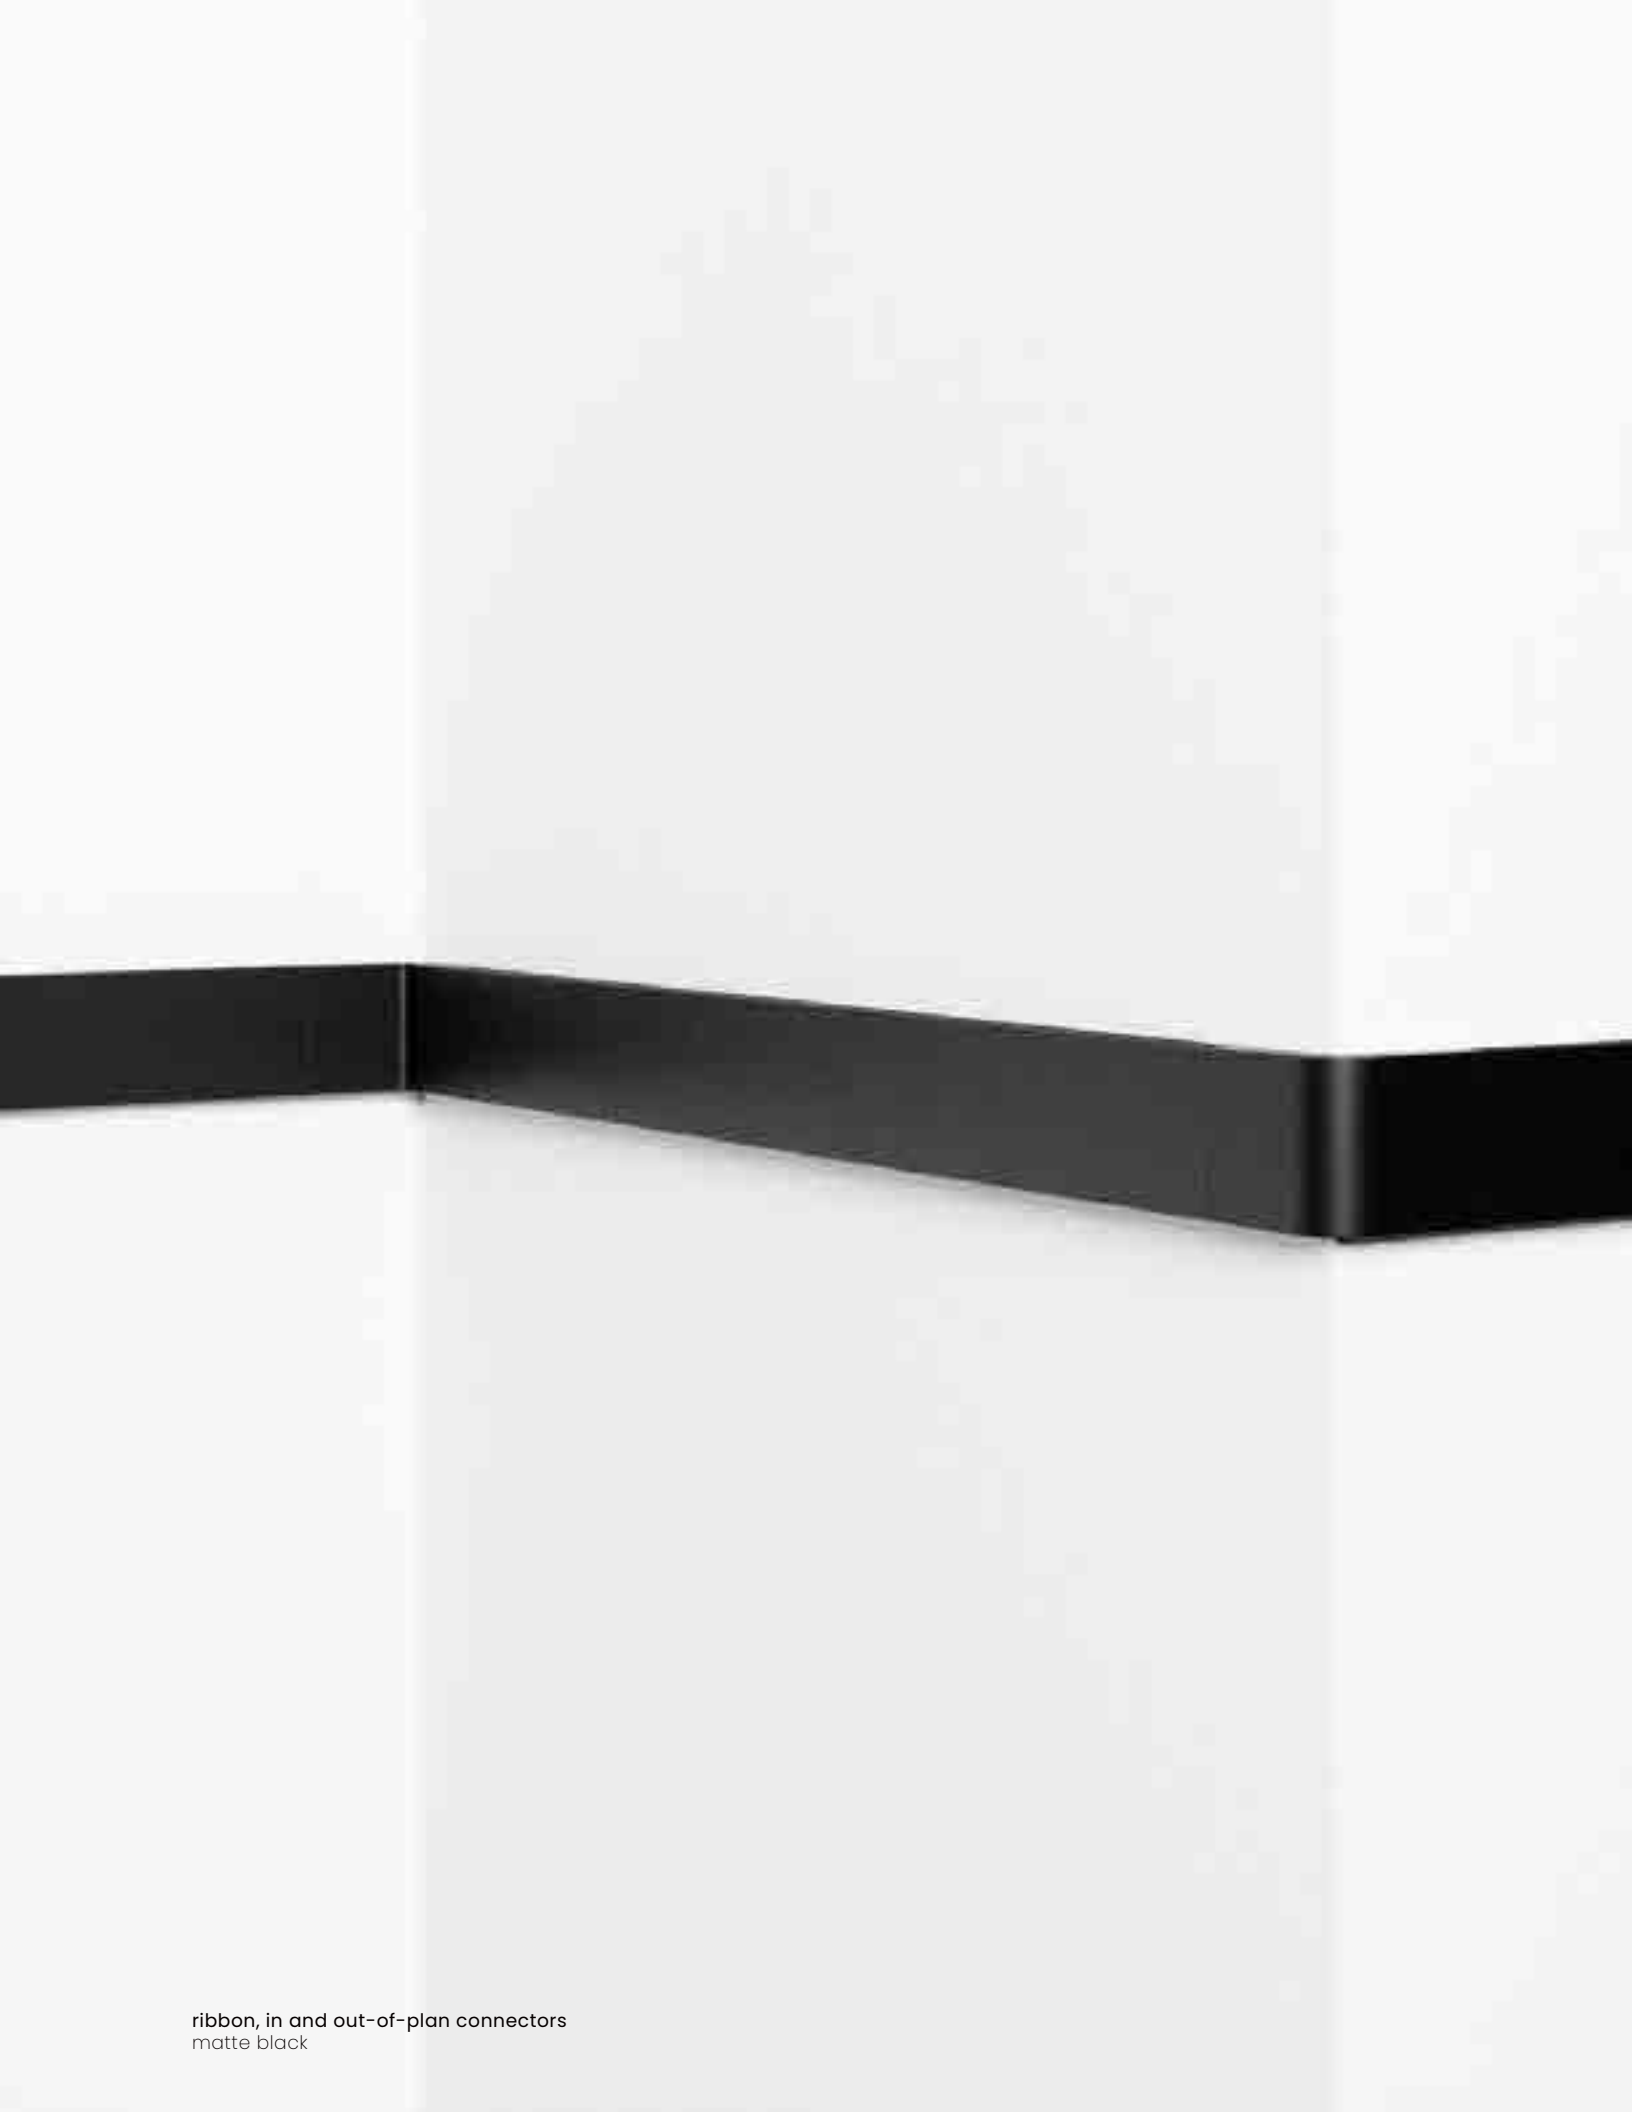

ribbon, in and out-of-plan connectors
matte black



a.








b.

a. spotlight large
satin aluminum
b. spotlight small
satin black



ribbon, spotlights small and large
off-white



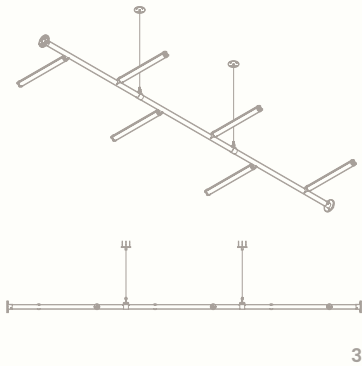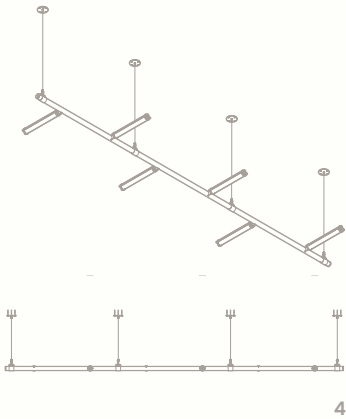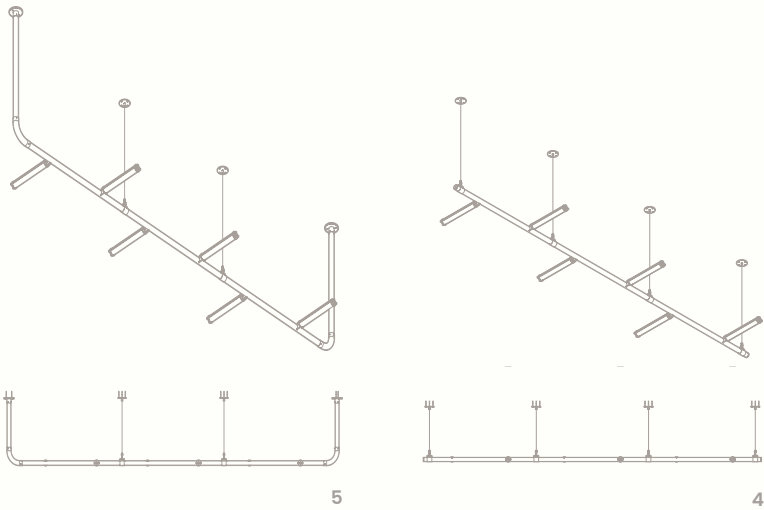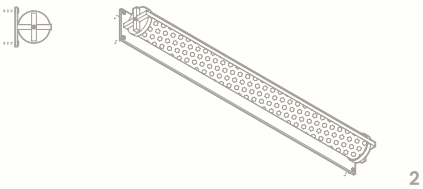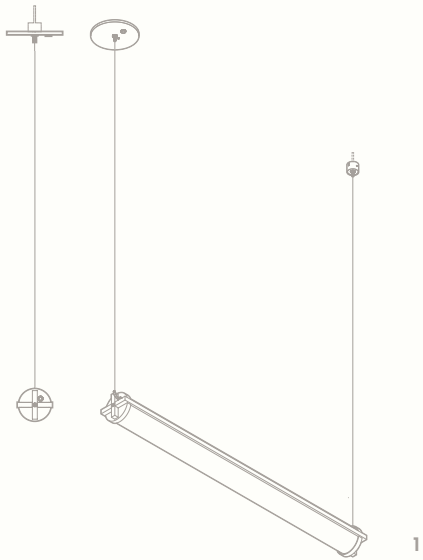

METROPOLIS SYSTEM

| | |
|---|---|
| METROPOLIS SUSPENSION | 1 |
| METROPOLIS WALL SCONCE | 2 |
| METROPOLIS WALL-TO-WALL, WALL-TO-WALL MOUNT | 3 |
| METROPOLIS WALL-TO-WALL, SUSPENSION MOUNT | 4 |
| METROPOLIS WALL-TO-WALL, CEILING MOUNT | 5 |





metropolis suspension, 36",
satin brass, direct-mount

METROPOLIS

SUSPENSION



DIMENSIONS

36 In or 48 In Lengths, 3.5 In Ø

WATTAGE & LUMENS

36 In - 61W, 0-6100LM Delivered

48 In - 81W, 0-8200LM Delivered

LIGHT TEMPERATURE

2400K, 2700K, 3000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, Frosted Acrylic, Blackened Steel

FINISHES

Satin Brass, Satin Aluminum, Polished Aluminum,
Polished Brass, All Black

CERTIFICATIONS


CE, cUL, UL

OTHER FEATURES


Black Hexagonal Mesh Available
Direct/Indirect Dimming

MOUNTING


Direct-Mount To Ceiling

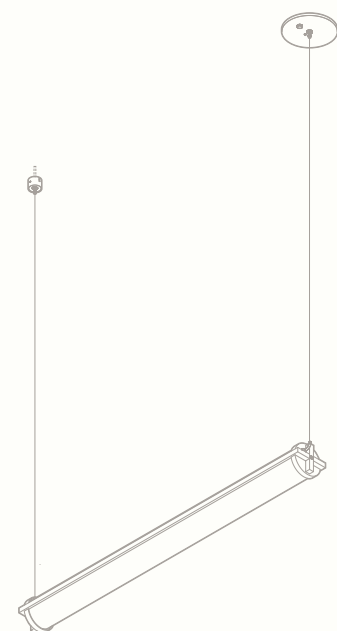


36", direct-mount to ceiling



36", direct-mount to ceiling
with hexagonal mesh

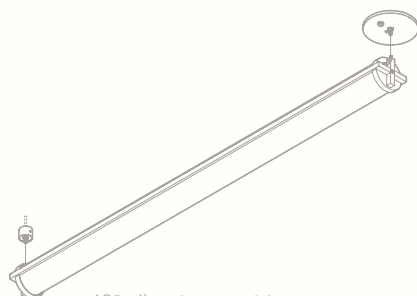

48", direct-mount to
ceiling

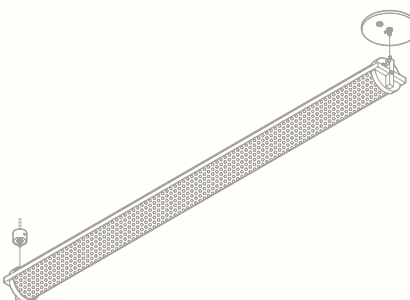

48", direct-mount to ceiling
with hexagonal mesh

Drop heights can vary.



METROPOLIS

WALL SCONCE



ADA COMPLIANT

DIMENSIONS

26 In, 36 In, or 48 In Lengths, 3.5 In Ø

WATTAGE & LUMENS

26 In - 41W, 0-4000LM Delivered

36 In - 61W, 0-6100LM Delivered

48 In - 81W, 0-8200LM Delivered

LIGHT TEMPERATURE

2400K, 2700K, 3000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, Frosted Acrylic, Blackened Steel

FINISHES

Satin Brass, Satin Aluminum, Polished Aluminum,
Polished Brass, All Black

CERTIFICATIONS

CE, cUL, UL, ADA Compliant


OTHER FEATURES

Black Hexagonal Mesh Available


Direct/Indirect Dimming

MOUNTING

Direct-Mount To Wall



26"




36" with hexagonal mesh



48"

Sconces can be installed vertically or horizontally.



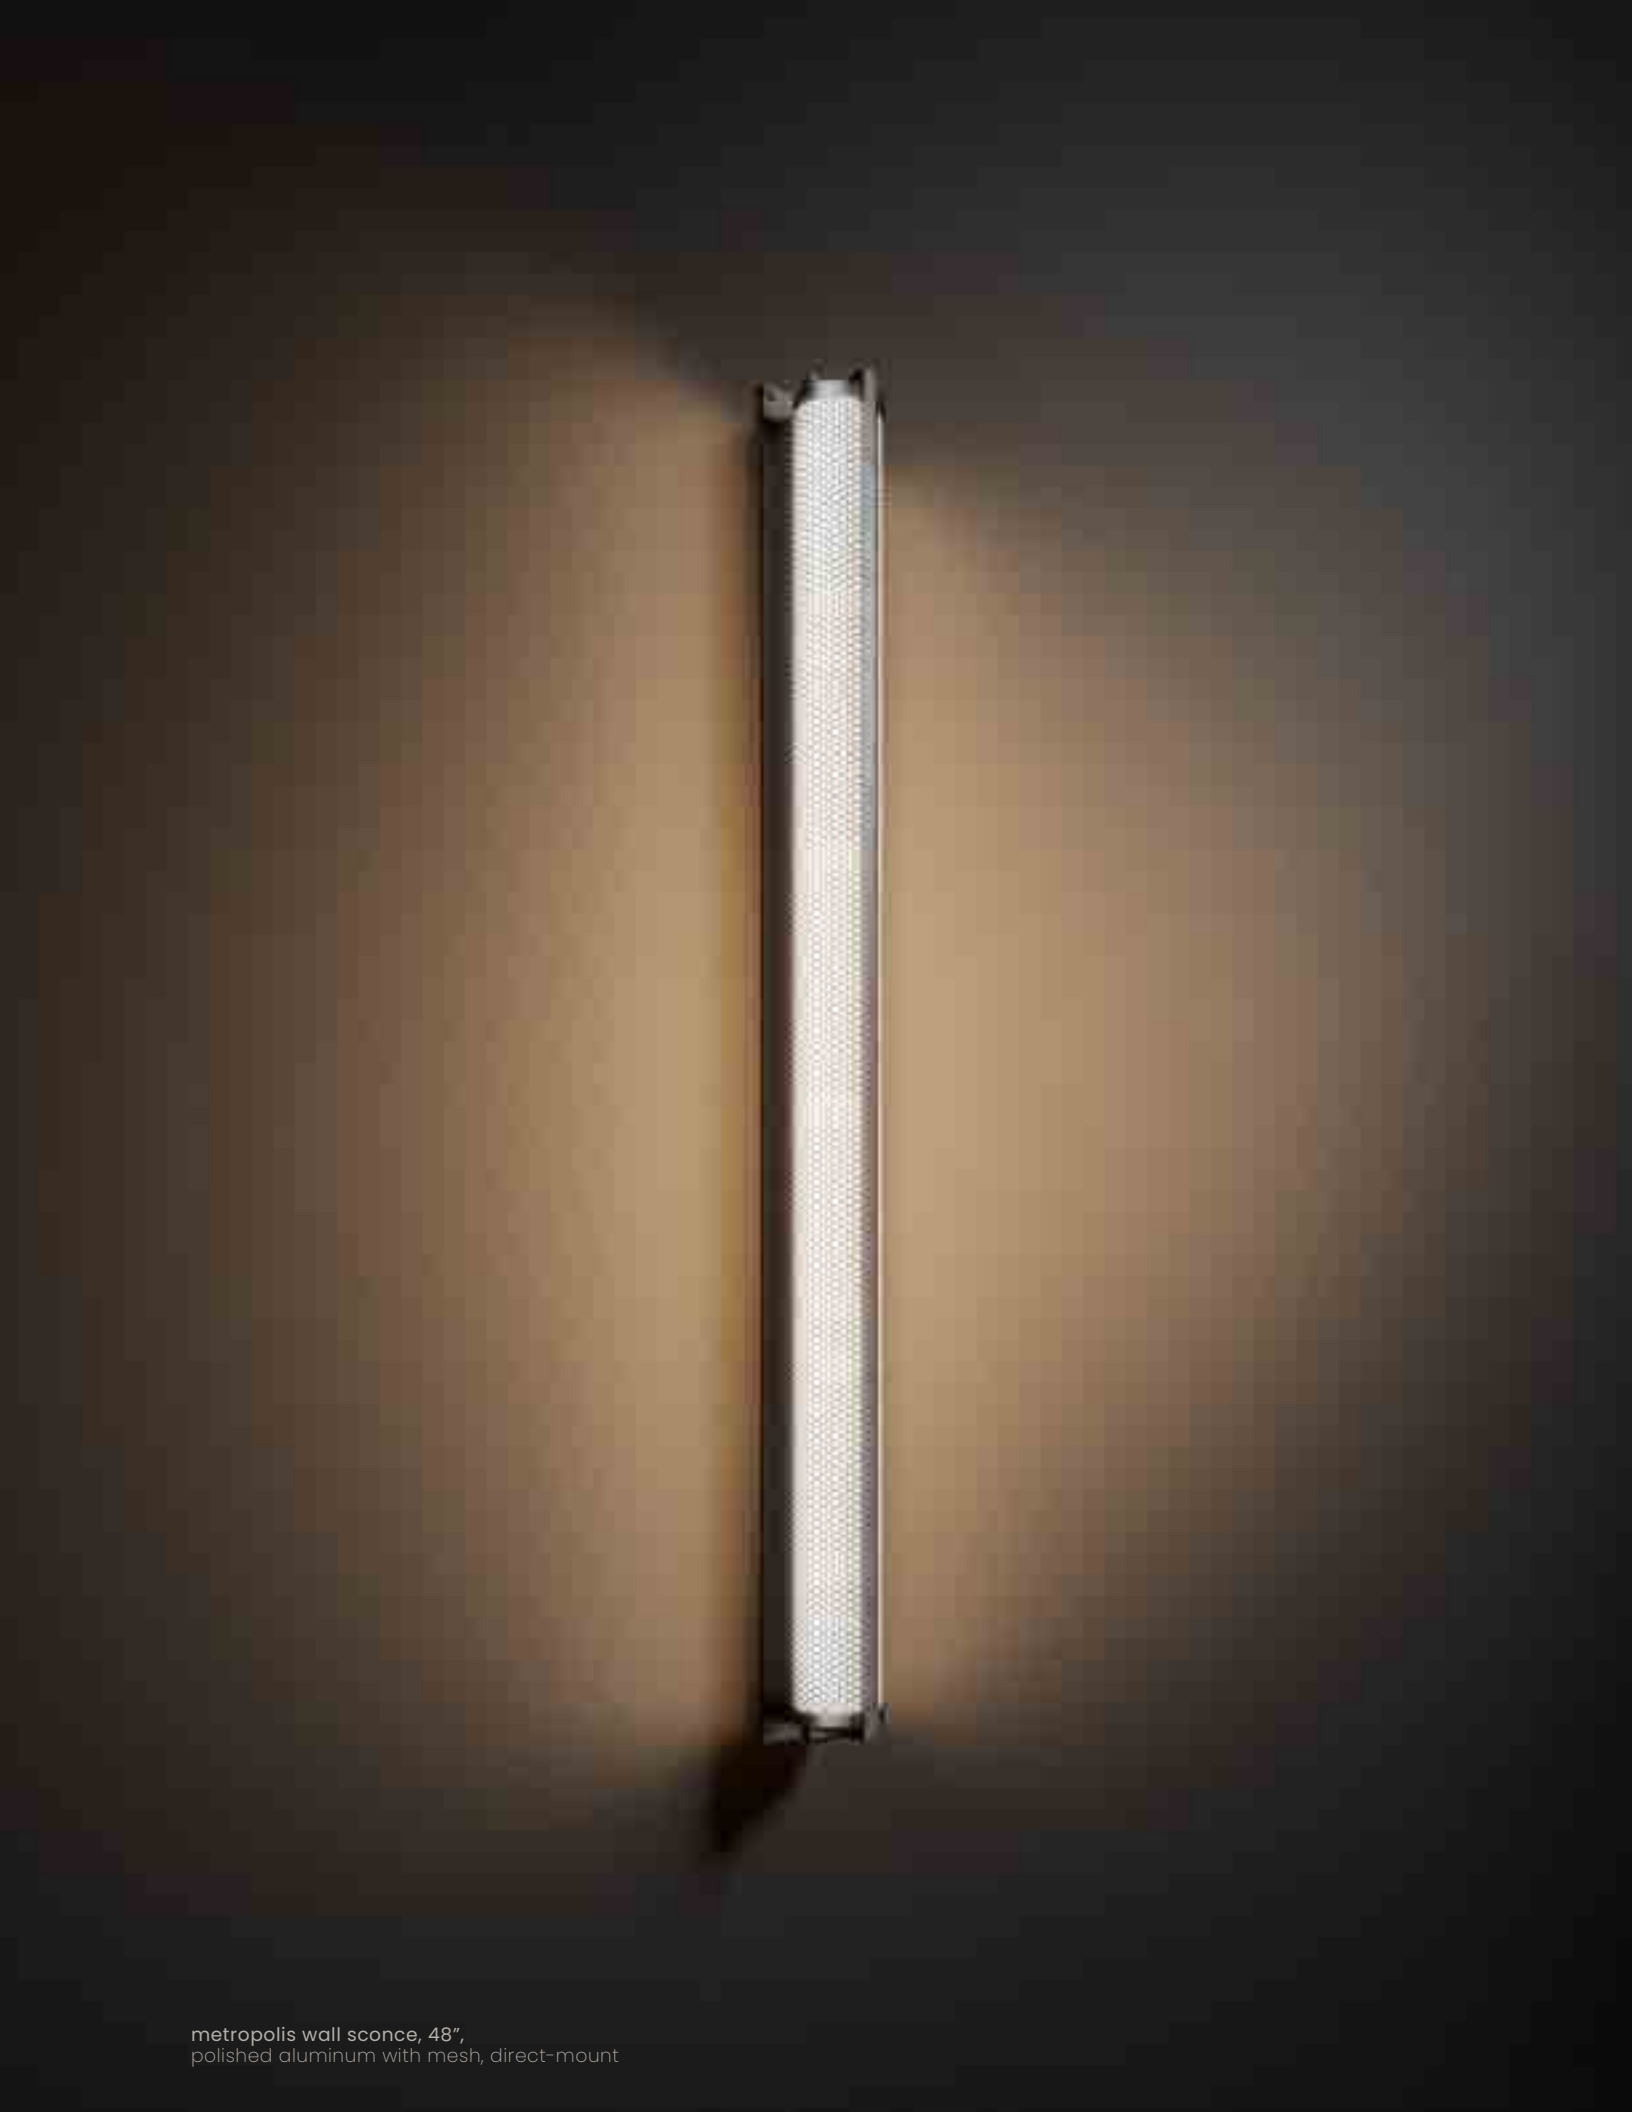

metropolis wall sconce, 48",
polished aluminum with mesh, direct-mount



metropolis wall-to-wall, 26" modules,
satin brass, suspension mount

METROPOLIS

WALL-TO-WALL



DIMENSIONS

26 In or 36 In Modules X 3.5 In Ø Custom Lengths

WATTAGE & LUMENS

26 In - 41W, 0-4000LM Per Module

36 In - 61W, 0-6100LM Per Module

LIGHT TEMPERATURE

2400K, 2700K, 3000K

LIGHT QUALITY

90CRI

MATERIALS

Brass, Aluminum, Frosted Acrylic, Blackened Steel For Mesh

FINISHES


Satin Brass, Satin Aluminum, Polished Aluminum, All Black

CERTIFICATIONS

CE, cUL, UL


MOUNTING

Wall-To-Wall, Suspension, Ceiling-Mount

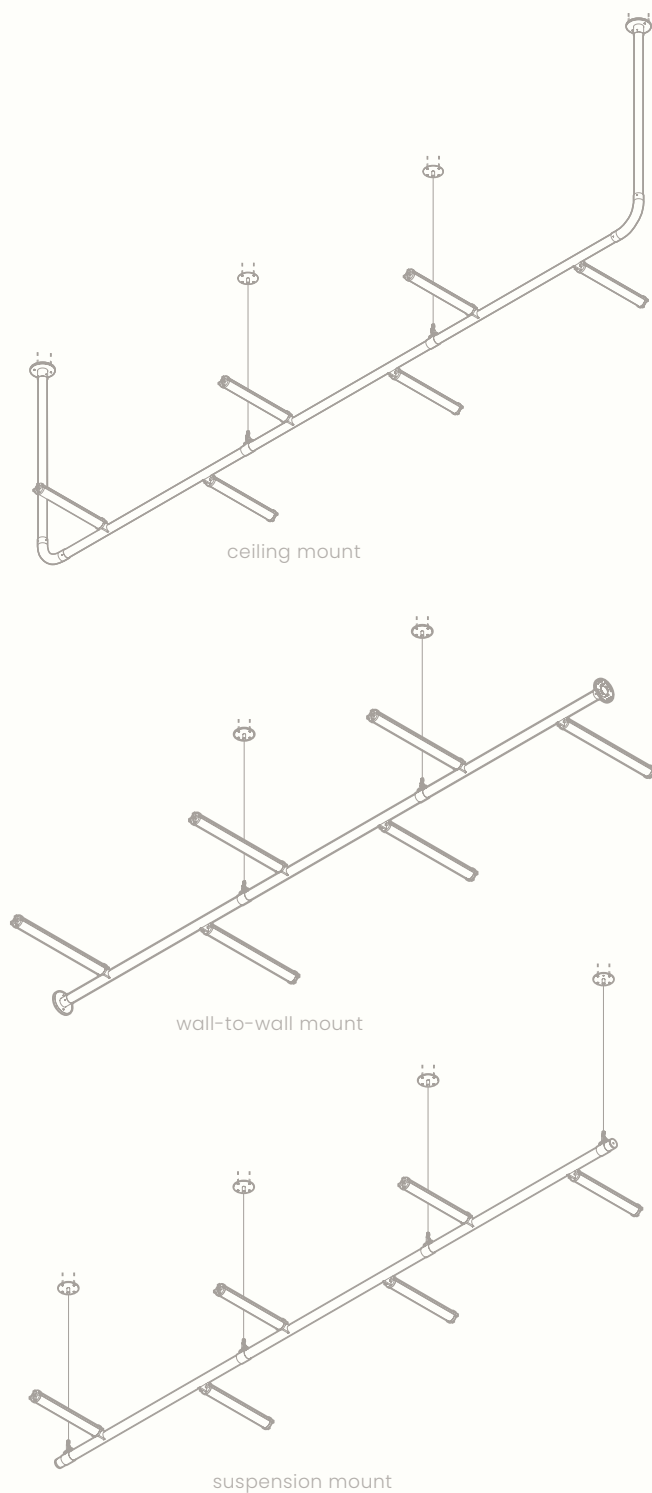





metropolis wall-to-wall, 26" modules, satin
brass with mesh, wall-to-wall mount




metropolis suspension, 36",
all black, direct-mount

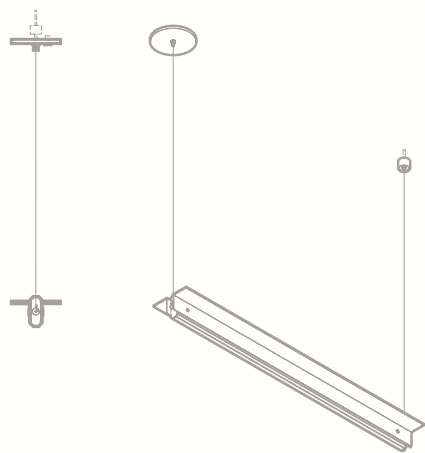

1

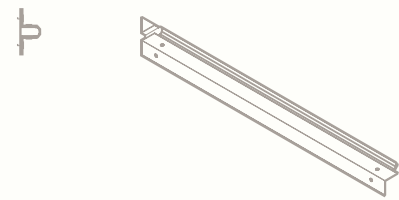

2

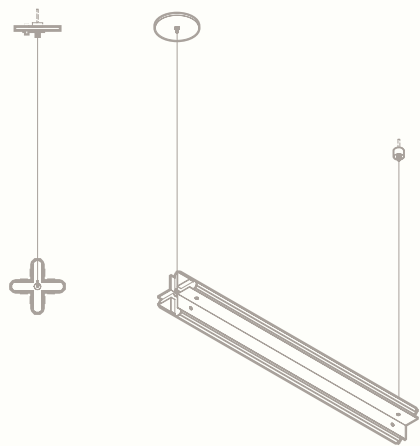

3

AXIS SYSTEM

AXIS T SUSPENSION 1

AXIS T WALL SCONCE 2

AXIS X SUSPENSION 3

AXIS X VERTICAL SUSPENSION 4





a.

b.

a. axis t suspension, 48",
satin brass, direct-mount

b. axis t wall sconce, 48",
black oxide, direct-mount

DIMENSIONS

36 In or 48 In Lengths

WATTAGE & LUMENS

36 In - 27.5W, 0-1800LM total

48 In - 37W, 0-2400LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Bronze, Frosted PMMA

FINISHES


Satin Brass, Polished Brass, Black Oxide, Antique Pewter, Black Walnut, Grey-Stained Ash

CERTIFICATIONS

CE, cUL, UL, Title 24, DAMP Rated

MOUNTING

Direct-Mount To Ceiling,
Direct-Mount To Wall

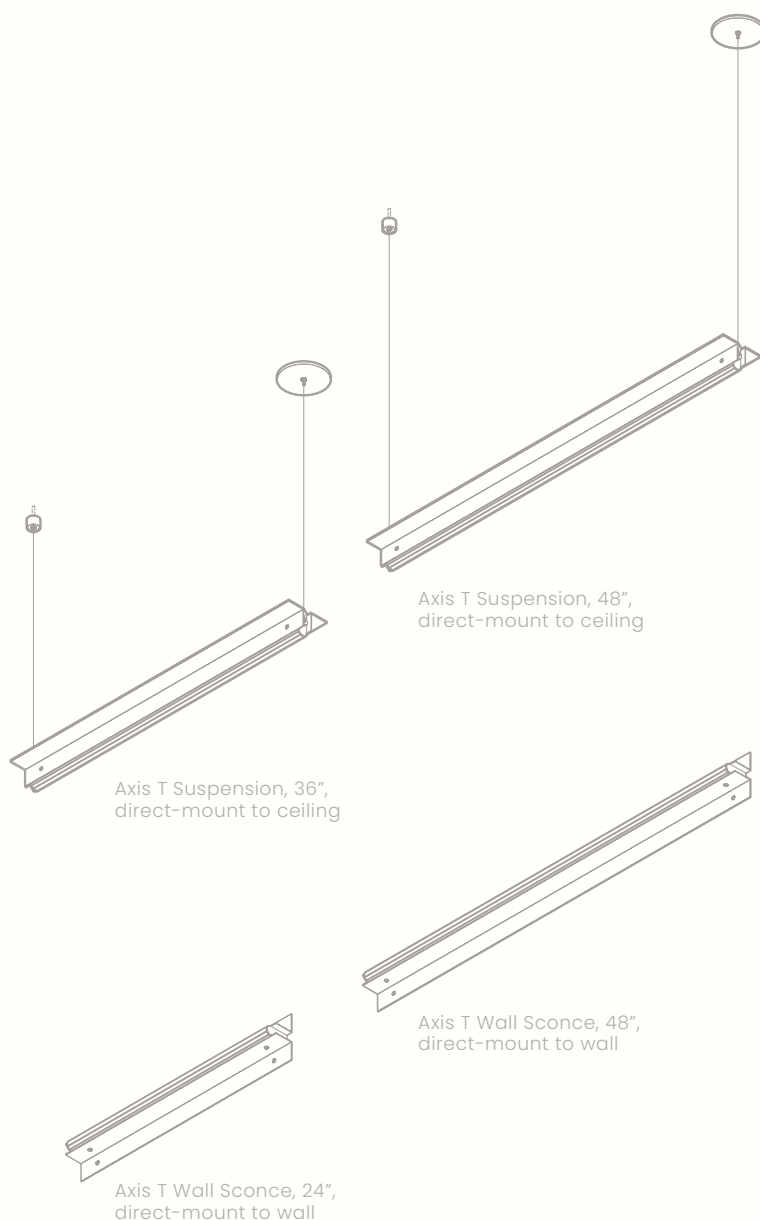

Sconces can be installed vertically or horizontally.



AXIS

AXIS X



DIMENSIONS

36 In or 48 In Lengths, 6 In X 6 In

WATTAGE & LUMENS

36 In - 55W, 0-3700LM total

48 In - 74W, 0-5000LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Bronze, Frosted PMMA

FINISHES

Satin Brass, Polished Brass, Black Oxide, Antique

Pewter, Black Walnut, Grey-Stained Ash

CERTIFICATIONS

CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Ceiling, Direct-Mount to Wall




Axis X Vertical Suspension,
36", direct-mount to ceiling



Axis X Vertical Suspension,
48", direct-mount to ceiling



Axis X Horizontal Suspension
36", direct-mount to ceiling

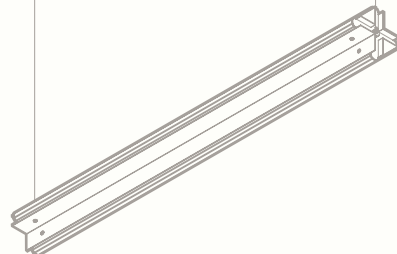

Axis X Horizontal Suspension,
48", direct-mount to ceiling






a.

b.

- a. axis x horizontal suspension, 36", polished brass, direct mount
- b. axis x vertical suspension, 36", gre7-stained ash, direct mount

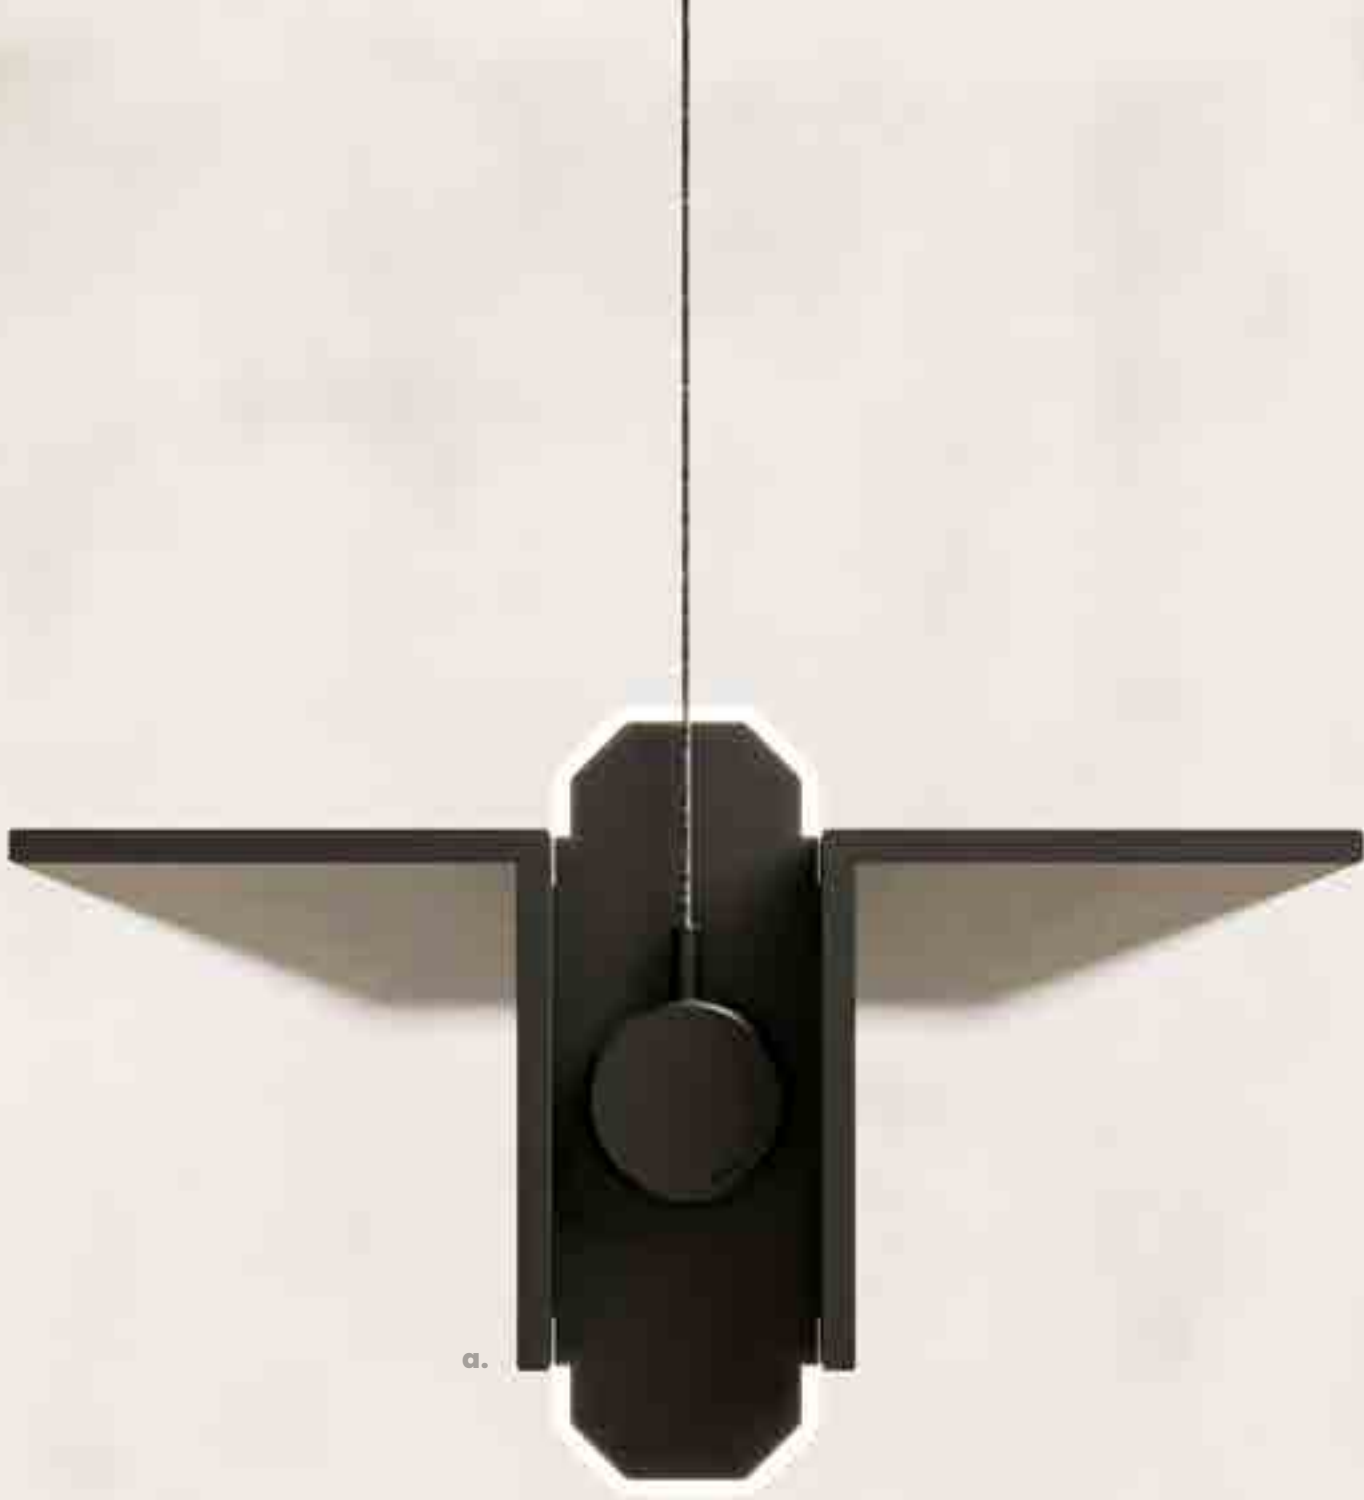


a.

a. axis t suspension, 36",
black oxide, direct-mount




b. axis x horizontal suspension, 36",
polished brass, direct-mount




3



2



1

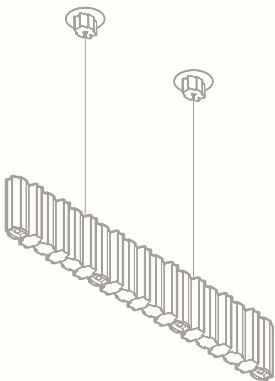

7



6




5




4



11



10



9



8

THE FLUTES SYSTEM

- IONIAN CEILING MOUNT 1
- IONIAN PENDANT 2
- IONIAN ARRAY 3
- LYDIAN WALL SCONCE 4
- LYDIAN CEILING MOUNT 5
- LYDIAN PENDANT 6
- LYDIAN ARRAY 7
- DORIAN WALL SCONCE 8
- DORIAN PENDANT 9
- DORIAN CEILING MOUNT 10
- DORIAN ARRAY 11






the flutes ionian pendant 12",
satin black, direct-mount

THE FLUTES

IONIAN

PENDANT

UL cUL CE

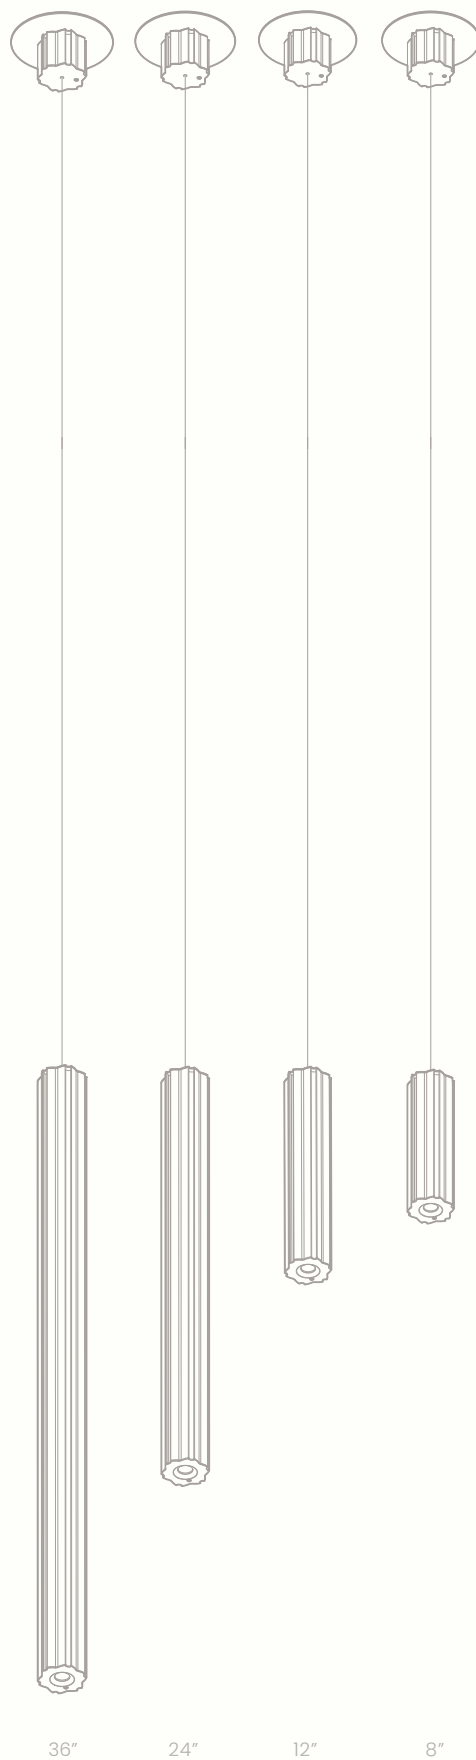

DIMENSIONS

8 In, 12 In, 24 In, 36 In

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES

Satin Aluminum, Satin Black

CERTIFICATIONS

CE, cUL, UL, Title 24

MOUNTING

Direct-Mount To Ceiling

Mounting without cover plate
available.



THE FLUTES

IONIAN

CEILING MOUNT



DIMENSIONS

8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS

6W, 0-650LM

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES


Satin Aluminum, Satin Black

CERTIFICATIONS

CE, cUL, UL, Title 24

MOUNTING

Direct-Mount To Ceiling

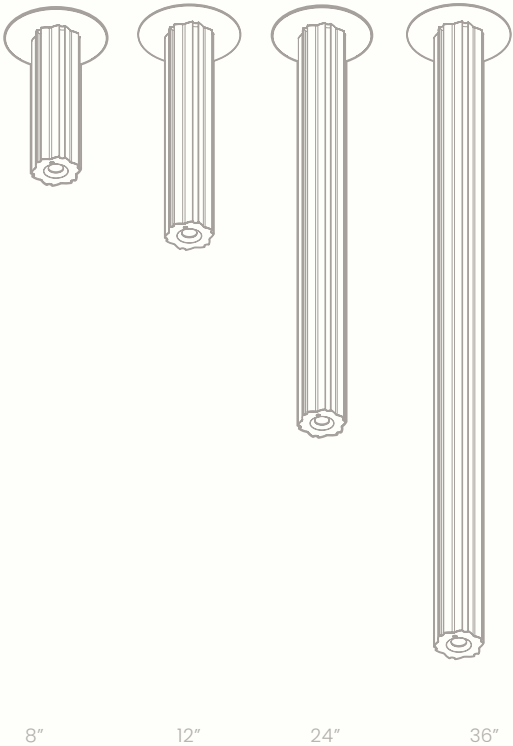

Mounting without cover plate available.





the flutes ionian ceiling-mount 12",
satin black, direct-mount



the flutes ionian chandelier, 4"x24",
satin black, center-mount

THE FLUTES

IONIAN

ARRAY



DIMENSIONS

8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS

6W, 0-650LM Direct Only

12W, 0-1300LM Direct & Indirect

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES

Satin Aluminum, Satin Black

CERTIFICATIONS

CE, cUL, UL, Title 24

MOUNTING

Center-Mount To Ceiling



4x26", center-mount to ceiling



4x26", center-mount to ceiling



8x36", center-mount to ceiling



8x36", center-mount to ceiling

Mounting without cover plate available.



THE FLUTES

LYDIAN

PENDANT



DIMENSIONS

8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS

6W, 0-650LM Direct Only
12W, 0-1300LM Direct & Indirect

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES


Satin Aluminum, Satin Black

CERTIFICATIONS

CE, cUL, UL, TITLE 24

MOUNTING

Direct-Mount To Ceiling

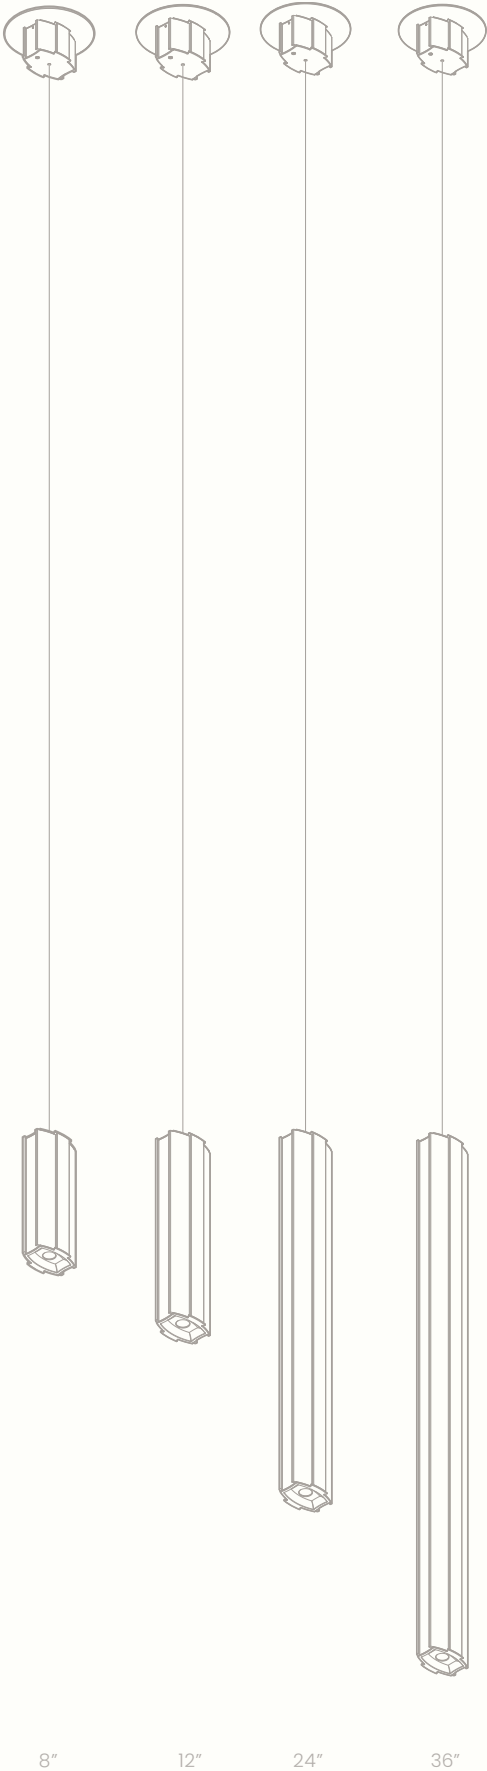

Mounting without cover plate available.





the flutes lydian pendant, 12",
satin black, direct-mount



the flutes lydian ceiling mount, 12",
satin black, direct-mount

THE FLUTES

LYDIAN



CEILING MOUNT

DIMENSIONS

8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS

6W, 0-650LM Direct Only

12W, 0-1300LM Direct & Indirect

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES


Satin Aluminum, Satin Black

CERTIFICATIONS

CE, cUL, UL, Title 24

MOUNTING

Direct-Mount To Ceiling

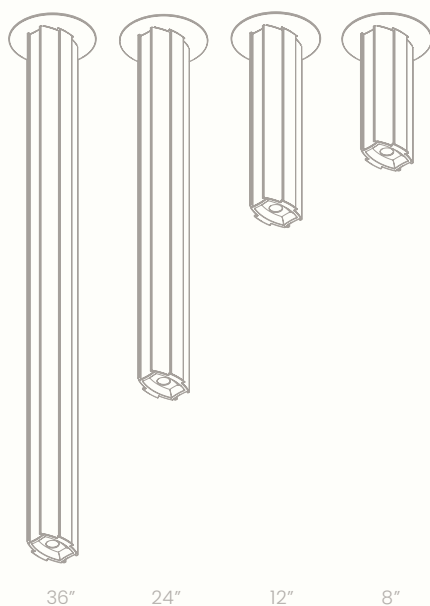

36"

24"

12"

8"

Mounting without cover plate available.



THE FLUTES

LYDIAN

SCONCE



DIMENSIONS

8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS

6W, 0-650LM Direct Only

12W, 0-1300LM Direct & Indirect

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES


Satin Aluminum, Satin Black

CERTIFICATIONS

CE, cUL, UL, Title 24

MOUNTING

Direct-Mount To Wall

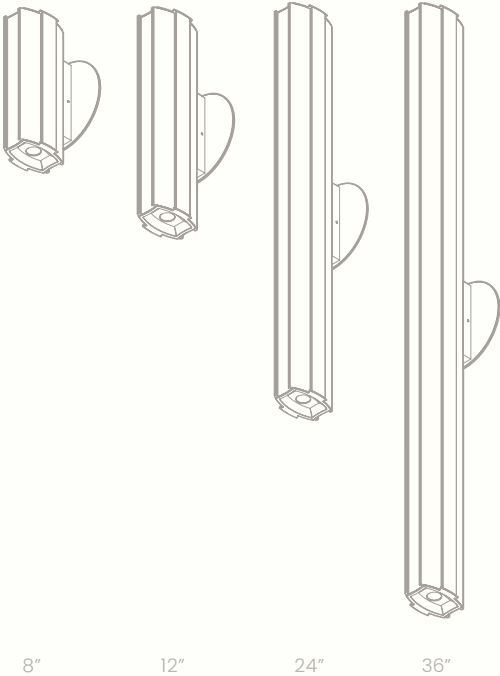

Mounting without cover plate available.





the flutes lydian wall sconce,
12",



the flutes lydian array,
8x48", satin black, direct-mount

THE FLUTES

LYDIAN

ARRAY



DIMENSIONS

8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS

6W, 0-650LM Direct Only

12W, 0-1300LM Direct & Indirect

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES


Satin Aluminum, Satin Black

CERTIFICATIONS

CE, cUL, UL, Title 24

MOUNTING

Direct-Mount To Ceiling

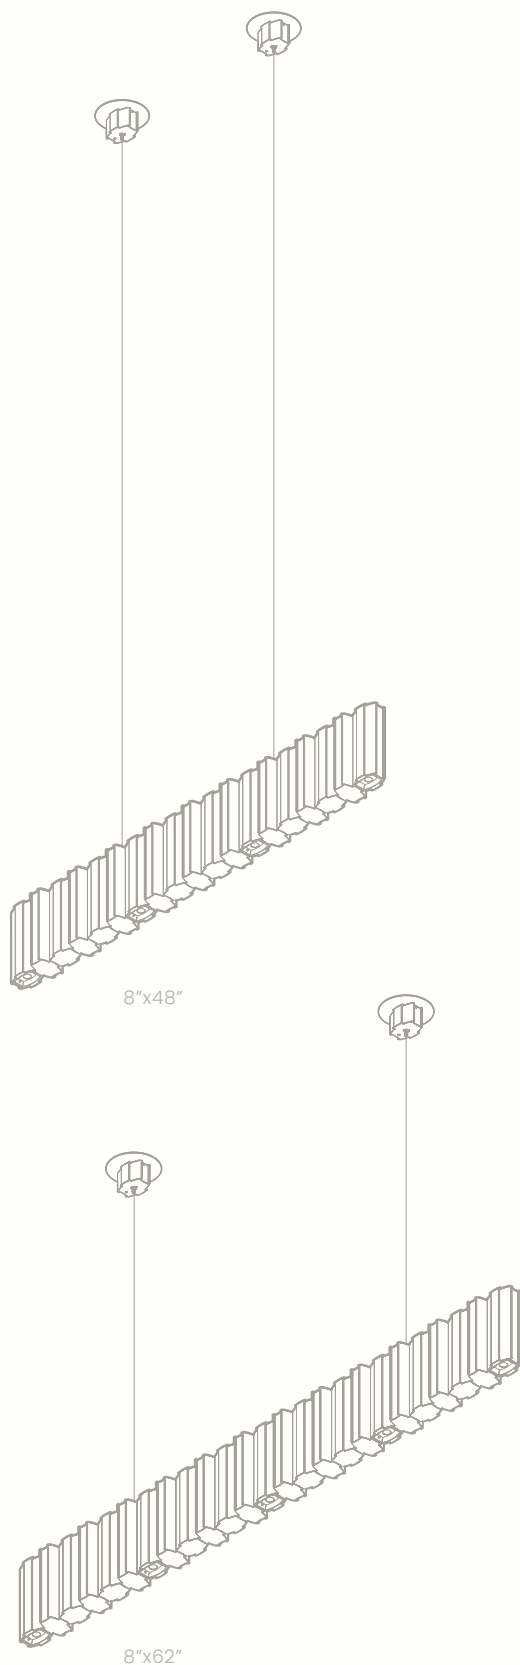

Mounting without cover plate available.



THE FLUTES

DORIAN

PENDANT

DIMENSIONS

8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS

6W, 0-650LM Direct Only

12W, 0-1300LM Direct & Indirect

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES


Satin Aluminum, Satin Black

CERTIFICATIONS

CE, cUL, UL, Title 24

MOUNTING

Direct-Mount To Ceiling

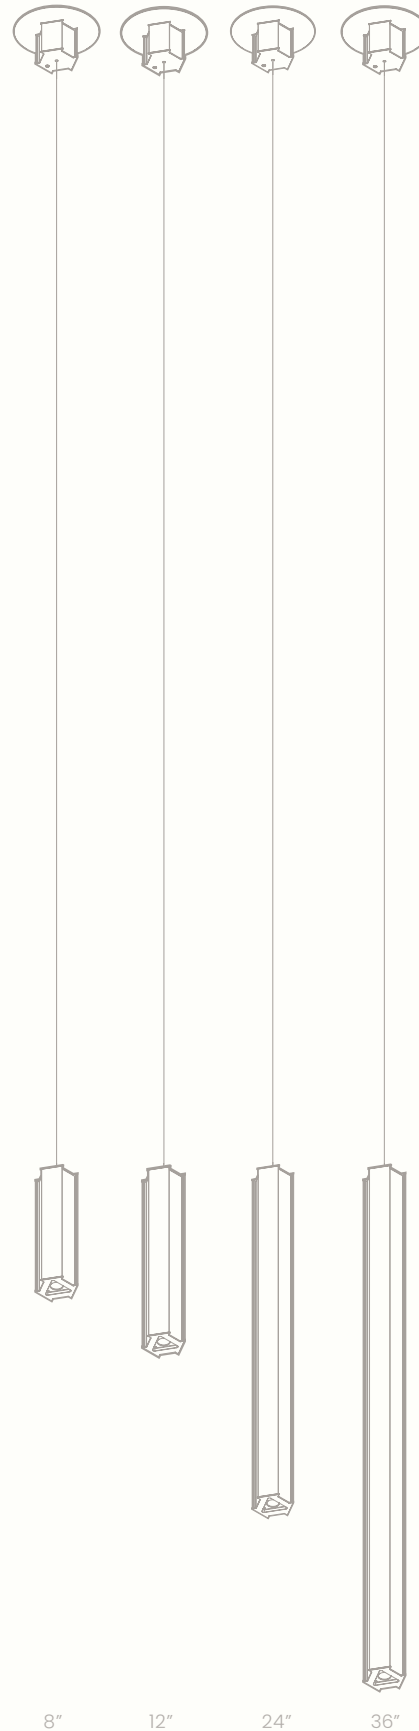

8"

12"

24"

36"

Mounting without cover plate available.





the flutes dorian pendant, 12",
satin black, direct-mount



the flutes dorian ceiling mount, 12",
satin black, direct-mount

THE FLUTES

DORIAN

CEILING MOUNT



DIMENSIONS

8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS

6W, 0-650LM Direct Only

12W, 0-1300LM Direct & Indirect

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES


Satin Aluminum, Satin Black

CERTIFICATIONS

CE, cUL, UL, Title 24

MOUNTING

Direct-Mount To Ceiling

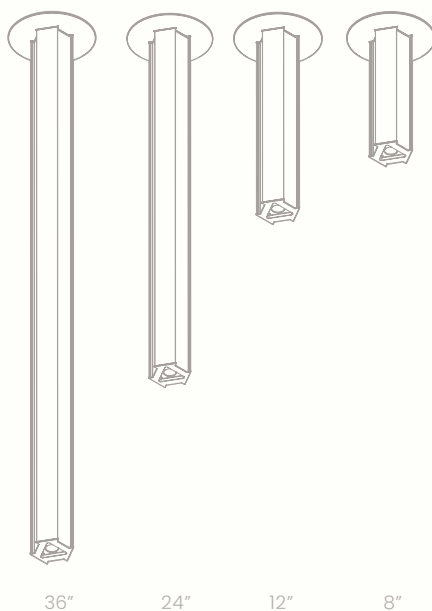

36"

24"

12"

8"

Mounting without cover plate available.



THE FLUTES

DORIAN

SCONCE



DIMENSIONS

8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS

6W, 0-650LM Direct Only

12W, 0-1300LM Direct & Indirect

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES


Satin Aluminum, Satin Black

CERTIFICATIONS

CE, cUL, UL, Title 24

MOUNTING

Direct-Mount To Wall

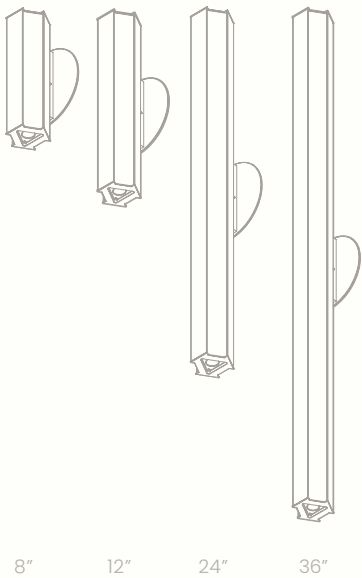

Mounting without cover plate available.





the flutes dorian wall sconce, 12",
satin black, direct-mount



the flutes dorian array, 36",
satin black, direct-mount

THE FLUTES

DORIAN

ARRAY

UL cUL CE

DIMENSIONS

8 In or 36 In Lengths, Varying

WATTAGE & LUMENS

3 Light Modules

18W, 0-1950LM

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES


Satin Aluminum, Satin Black

CERTIFICATIONS


CE, cUL, UL, Title 24

MOUNTING

Direct-Mount To Ceiling

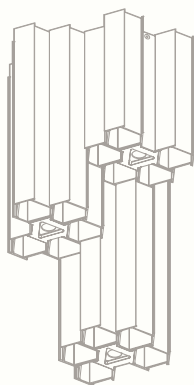

18", direct-mount to ceiling

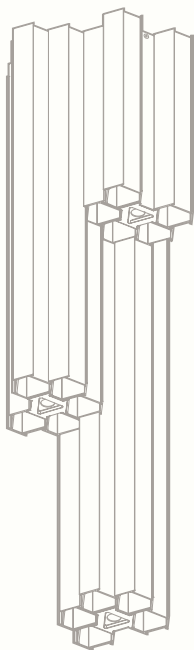

36", direct-mount to ceiling





the flutes dorian array, 36",
satin black



the flutes dorian array, 36",
satin aluminum




a.

a. the flutes dorian pendant, 12"
satin black, direct-mount



b.

b. the flutes ionian chandelier, 4x24",
satin black, center-mount

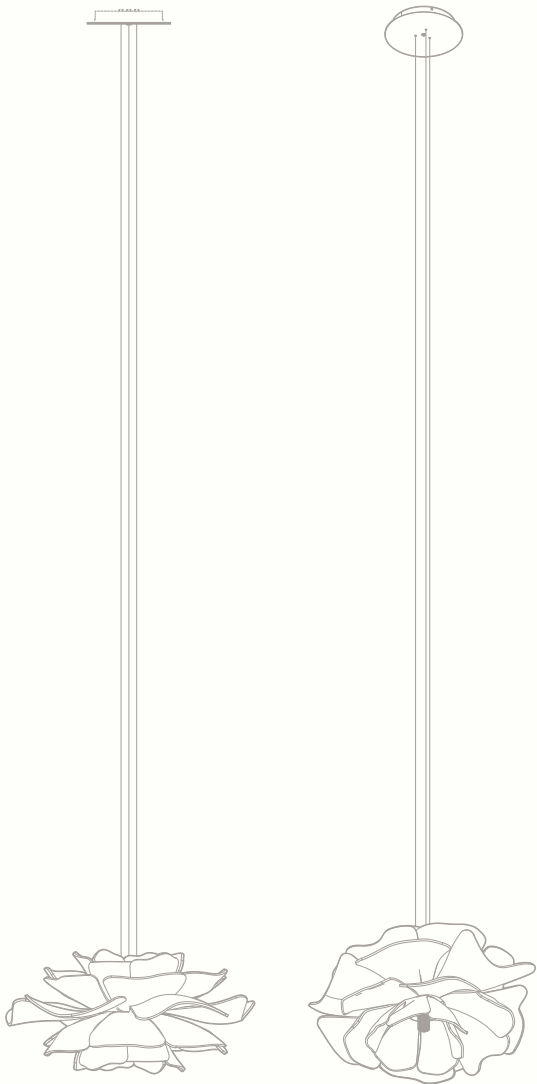

LOVE ME NOT

LOVE ME NOT PENDANT 1



love me not pendant, direct mount

LOVE ME NOT

À LA FOLIE



DIMENSIONS

36 In Ø X 16 In

LUMENS

0-3000LM

LIGHT TEMPERATURE

2700K

LIGHT QUALITY

90CRI

WATTAGE

32W

MATERIALS

Lucite, Aluminum, Copper

FINISHES (HEATSINK)


Black Oxide

CERTIFICATIONS

cUL, UL


MOUNTING

Direct-Mount To Ceiling

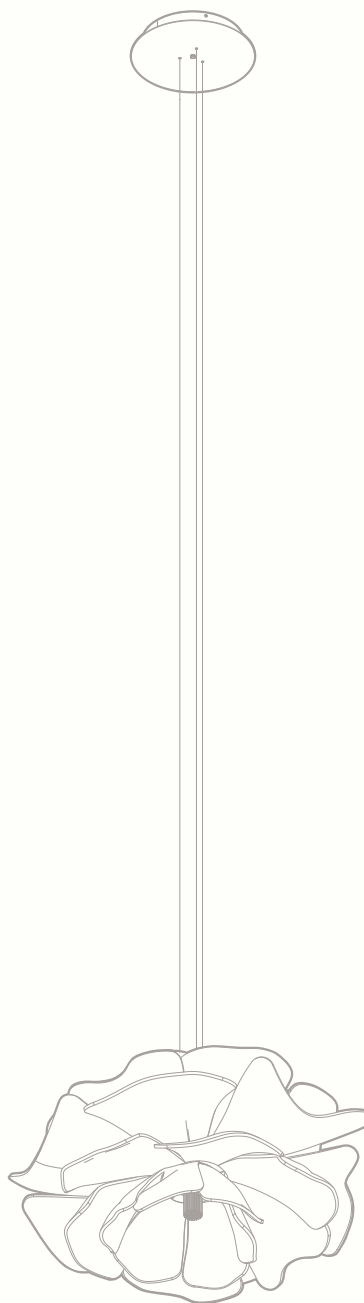


36", direct-mount to ceiling


Drop heights can vary.




5




2




1



6



3



4

GROUND CONTROL

| | |
|----------------------------------|---|
| GROUND CONTROL POWER OUTLET | 1 |
| GROUND CONTROL TOGGLE SWITCH | 2 |
| GROUND CONTROL DIMMER KNOB | 3 |
| GROUND CONTROL DIMMER DIAL | 4 |
| GROUND CONTROL DOUBLE USB PORT | 5 |
| GROUND CONTROL DOUBLE USB-C PORT | 6 |



a.



b.



c.

a. ground control dimmer dial,
satin brass


b. ground control dimmer knob,
satin brass

c. ground control toggle switch,
satin brass


GROUND CONTROL

DIMMER DIAL


DIMMER KNOB

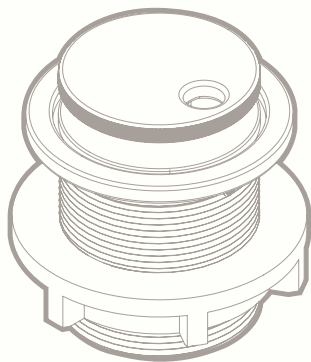

dimmer dial



dimmer knob

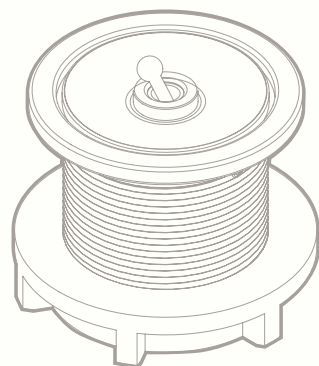

toggle switch

DIMENSIONS

2.5 In Ø X 2 In

COMPATIBILITY

Thin Collection
Metropolis Collection
Axis Collection
Most 12-24V Constant Voltage Lighting

MATERIALS

Brass, ABS

FINISHES

Satin Brass, Black Oxide, Satin Nickel

GROUND CONTROL

TOGGLE SWITCH

DIMENSIONS

2.5 In Ø X 2 In

COMPATIBILITY

Thin Collection
Metropolis Collection
Axis Collection
Most 12-24V Constant Voltage Lighting

MATERIALS

Brass, ABS

FINISHES

Satin Brass, Black Oxide, Satin Nickel

MOUNTING

Inset Into Surfaces



GROUND CONTROL

POWER OUTLET

DOUBLE USB & USB-C



DIMENSIONS

2.5 In Ø X 2 In

COMPATIBILITY - USB

2.0 Type A

COMPATIBILITY - POWER OUTLET

Nema 5-15 (IEC Plug Type B)

MATERIALS

Brass, ABS

FINISHES

Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS - USB


CE

CERTIFICATIONS - POWER OUTLET


cUL, UL

MOUNTING


Inset Into Surfaces

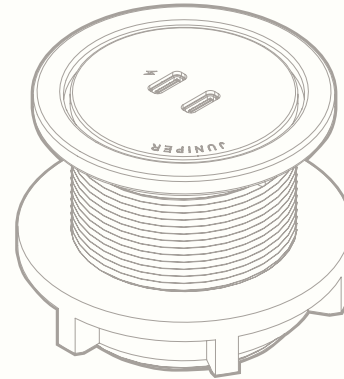

usb-c

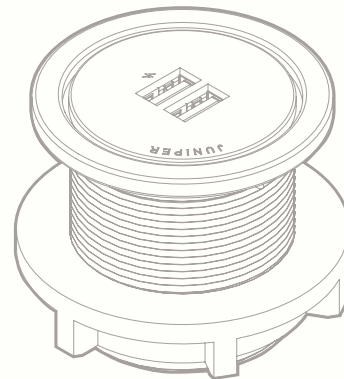

usb

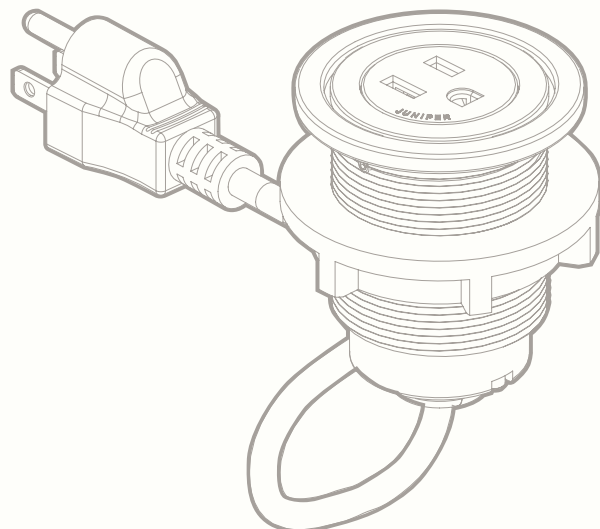

power outlet



a.



b.



c.

- a.** ground control power outlet,
satin black
- b.** ground control double usb-c,
satin nickel
- b.** ground control double usb,
satin brass



a.







b.

- a.** ground control double usb-c,
satin nickel
- b.** ground control double usb,
satin brass
- c.** ground control double usb,
satin brass



c.



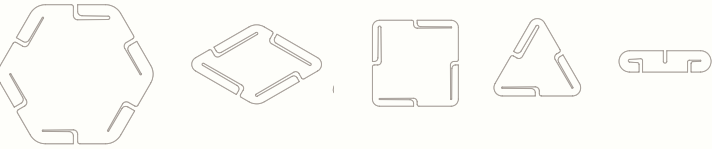

COMPONENTS

Juniper offers a variety of components to customize and update fixtures for years to come. All components are precision-machined in solid bass and have been designed to pair with particular fixtures, power supplies, or accommodate specific installation methods.

| | |
|------------------------------|---|
| JUNCTION BOX COVER PLATE | 1 |
| AIRCRAFT CABLE GRIPPER | 2 |
| LARGE LOCAL CANOPY | 3 |
| LOCAL CANOPY | 4 |
| THIN TASK LAMP INSET GROMMET | 5 |
| THIN TASK LAMP WALL MOUNT | 6 |
| CABLE COLLARS | 7 |
| THIN LINEAR SUSPENSION | |
| THIN PRIMARIES TRIANGLE | |
| THIN PRIMARIES SQUARE | |
| THIN PRIMARIES RHOMBUS | |
| THIN PRIMARIES HEXAGON | |

JUNCTION BOX COVER PLATE

The Junction Box Cover Plate simply installs over a junction box for remotely-powered suspended fixtures. The flat metal plate can be used to center-mount fixtures or connect the power-end of a fixture to the ceiling.

LEAD TIME

2-4 Weeks

DIMENSIONS

5 In Diameter x 0.5 In

COMPATIBLE PRODUCTS (BY MOUNTING POINTS)

1 – All Direct-Mount to Ceiling linear suspensions (Axis, Metropolis, THIN System).

Vertical suspensions with a single segment.

THIN Primaries suspensions with Direct-Mount to Ceiling option.

2 – Center-Mount to Canopy single-segment linear fixtures (Axis, Metropolis, THIN System).

3 – THIN Primaries Triangle with Center-Mount to Canopy option.

THIN Vertical Suspension with 3 segments.

THIN linear suspensions with 2 connected sections and Center-Mount to Canopy option.

4 – THIN Primaries Square, Rectangle, or Rhombus with Center-Mount to Canopy option.

THIN Vertical Suspension with 4 segments.



6 – THIN Primaries Hexagon with Center-Mount to Canopy option.

THIN Vertical Suspension with 6 segments.

8 – THIN Primaries Octagon with Center-Mount to Canopy option.

FINISHES

Satin Brass, Black Oxide, Satin Nickel



LOCAL CANOPY

The Local Ceiling Canopy hosts a brass flat plate with an adjustable collar built to hold a 60W power supply for locally-powered fixtures. The canopy's mesh collar draws heat away from the power supply, adding significant longevity to the fixture.

DIMENSIONS

7 In Diameter x 2 In

COMPATIBLE PRODUCTS

BY # OF MOUNTING POINTS

1 - Direct-Mount to ceiling linear suspensions: Axis, Metropolis, THIN.

Vertical suspensions with a single segment.

THIN Primaries suspensions with Direct-Mount to ceiling option.

2 - Center-mount singlesegment linear fixtures: Axis, Metropolis, THIN.

3 - THIN Primaries Triangle with Center-Mount to Canopy option.

THIN Vertical Suspension with 3 segments.
THIN linear suspensions with 2 connected sections and Center-Mount to Canopy option.

4 - THIN Primaries Square, Rectangle, or Rhombus with Center-Mount to Canopy option.

THIN Vertical Suspension with 4 segments.


6 - THIN Primaries Hexagon with Center-Mount to Canopy option.

THIN Vertical Suspension with 6 segments.

8 - THIN Primaries Octagon with Center-Mount to Canopy option.

FINISHES

Satin Brass, Black Oxide, Satin Nickel

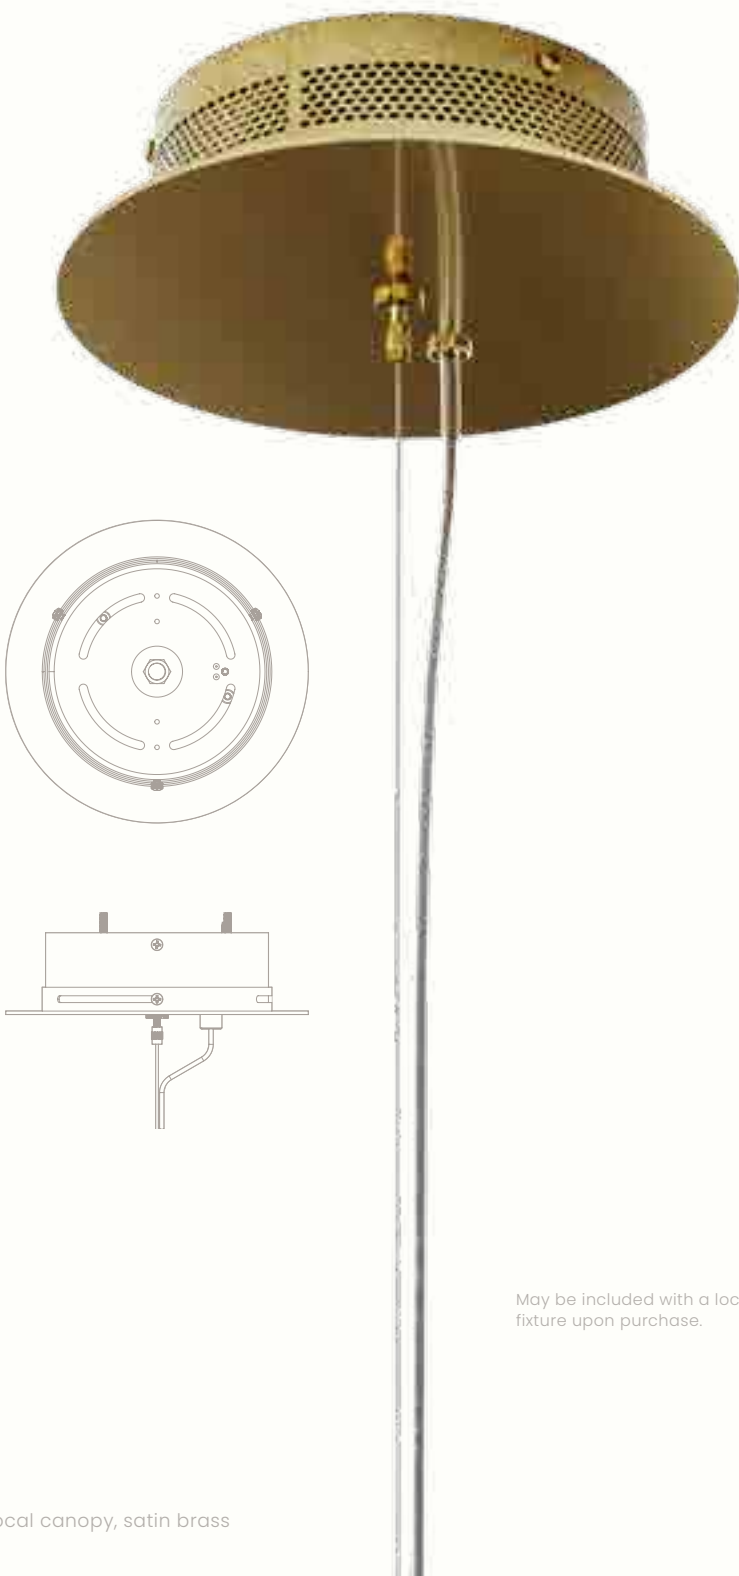

May be included with a locally-powered fixture upon purchase.

THIN TASK LAMP

INSET GROMMET

The Desk Grommet Base enables a THIN Task Lamp to integrate into a surface. The precision-machined solid brass grommet seamlessly matches THIN Task Lamp and Ground Control Collections to create a desktop hub for lighting and power controls.

DIMENSIONS

2.5 In Diameter x 2.19 In

COMPATIBLE PRODUCTS


THIN T & S Task Lamp

MATERIALS

Solid Brass

FINISHES

Satin Brass, Black Oxide, Satin Nickel



THIN TASK LAMP

WALL MOUNT

The THIN Task Lamp Wall Mount Base transitions a THIN Task Lamp from tabletop lighting to a functional wall-mounted fixture. Compatible with models T & S, the wall mount is precision-machined in solid brass to match THIN Task Lamp and Ground Control Collections. This component may be included a THIN Task Lamp upon purchase.

DIMENSIONS

2.25 In x 2 In x 1.25 In

COMPATIBLE PRODUCTS


THIN T & S Task Lamps

MATERIALS

Solid Brass

FINISHES

Satin Brass, Black Oxide, Satin Nickel

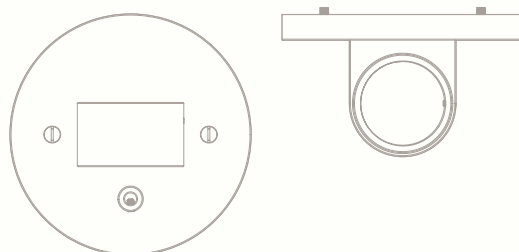

CABLE COLLAR

THIN SUSPENSION

THIN PRIMARIES

Solid brass Cable Collars offers a minimal solution for collecting aircraft cables and power cords from suspended fixtures into one centralized guide.

DIMENSIONS

Linear – 3.25 x 0.75 In

Triangle – 3 In per side

Square – 3 In per side

Rhombus – 2.75 In per side

Hexagon – 2.3 In per side

COMPATIBLE PRODUCTS

Center-mounted THIN Primaries



THIN Suspension

MATERIALS

Solid Brass

FINISHES

Satin Brass, Black Oxide, Satin Nickel

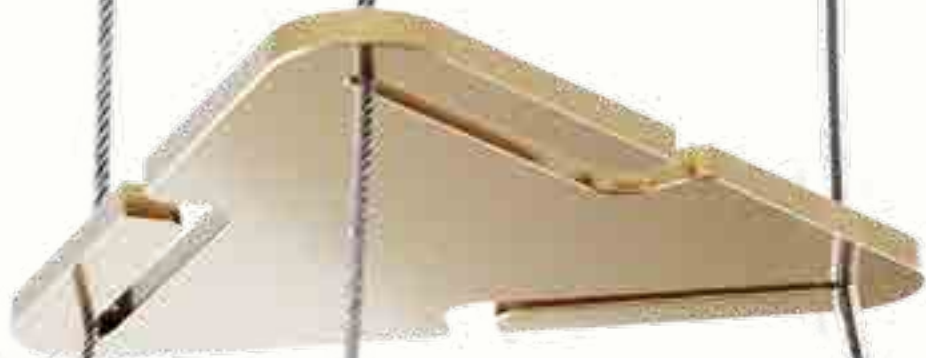

JUNIPER-DESIGN.COM

+ 1 347 799 2915

FACTORY

157 WATER ST
SOUTHINGTON,
CT 06489

SHOWROOM

1 CROSBY ST
2ND FL., NEW YORK,
NY 10012

