



LED Lichtprofil aus stranggepresstem Aluminium
 Oberfläche schwarz eloxiert oder weiß pulverbeschichtet
 Zurückversetzte Linsen, mit schwarzem Raster
 Direkt und indirekte Lichtverteilung

Extruded aluminium LED profile
 Anodised black surface or white powder-coated
 Recessed lense in combination with louvre
 Direct and indirect light beam

Profilo in alluminio pressofuso a LED
 Anodizzato nero o verniciato a polveri in bianco
 Lente retrocessa combinata con griglia nera
 Luce diretta ed indiretta

Profil en aluminium pressé de LED
 Anodisé noir ou vernissé à poudres en blanc
 Optique placée en fond combiné avec darklight
 Lumière directe et indirecte

UGR < 19

W2 = LED 2700K
 W3 = LED 3000K
 W4 = LED 4000K

A++ - A


IP 20  

RIDE LENS HOME PDI

220-240V AC/DC · CRI >90 · Binning SDCM 3

SYS 22W

634-003010323XXY	 45°	1920lm
634-003010329XXY	 45°	2090lm
634-003010324XXY	 45°	2220lm

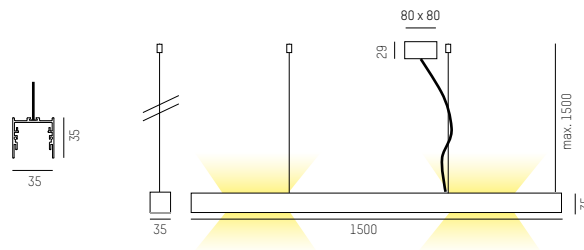

ARTIKELNUMMER ERGÄNZEN / COMPLETE CODE

XX = FARBE/COLOUR

Y = DIMMBAR/DIMMABLE

W white = 05
 SE black anodized = 06

S switchable = 0
 D DALI dimm = d

