


NIANO

8-017050

NIANO SURFACE MOUNTED WALL LUMINAIRE made of aluminium, white matt, similar to RAL 9003, beam 20°, light output direct, IP40 flexible arm, ceiling base DMxH=84x30mm



DRAWING

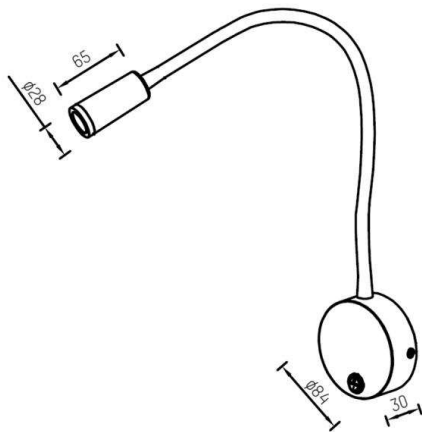

LIGHT DISTRIBUTION CURVE

TECHNICAL DETAILS

System perform. [W]	2
Bulb type	LED
Luminous flux [lm]	120
Colour temp. [K]	2700K
CRI	>80
Light output	direct
Beam angle [°]	20°
Voltage [V]	110-240V 50/60Hz
Material	aluminium
Length [mm]	500
Diameter [mm]	84
Troat [mm]	30
IP protection class	IP40
Voltage class	protection cl. I
Net weight [kg]	0,53
Color lamp	white matt
RAL	9003
EAN-Number	9010506038163
Lifetime [h]	25 000
Energy efficiency cl.	A++-A

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.