

TECHNICAL DATA SHEET



200CENT SQUARE 250LM R FIX TRIMLESS IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

⊞ ∅76 - h = 125 mm

Material: CALCYT® plaster

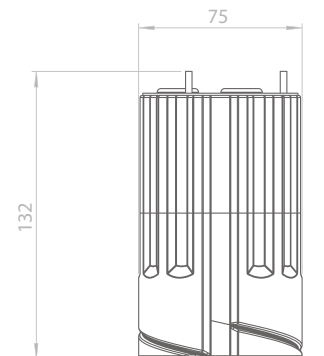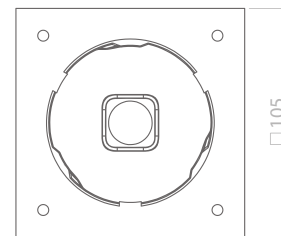

REF N° 200 BLACK

Black
Nero
Schwarz
Zwart
Noir
Negro



REF N° 200 WHITE

White
Bianco
Weiß
Wit
Blanc
Blanco

200CENT SQUARE R FIX IP20 250LM CRI 92

2200°K	2700°K	3000°K	4000°K
REF N° 524 27 530	REF N° 524 27 930	REF N° 524 27 830	REF N° 524 27 730

3W - 250lm - 2 Step MacAdam - **A+**
Serial wiring - - **CE** - -
Requires remote LED driver - 1050mA
Narrow beam 12° - Ultra low glare (UGR < 13)

REMOTE LED DRIVER ON/OFF

REF N° 697 00 015 min.2W max. 39W


REF N° 697 00 025 min.2W max. 50W

230V/50Hz - - current controlled
 - **CE** - IP20 - 1050mA - not dimmable

REMOTE LED DRIVER DIM

REF N° 697 60 025 min. 2W max. 60W
1-10V DALI PUSH

230V/50Hz - - current controlled
 - **CE** - IP20 - 1050mA - dimmable

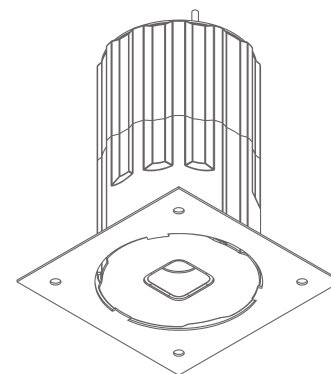

INSTALLATION KIT

STANDARD (included) installation system for concrete ceiling
height adjustable

BEAM ANGLES

STANDARD (included) beam angle 12°



TECHNICAL DATA SHEET


200CENT SQUARE 500LM R FIX TRIMLESS IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ ∅76 - h = 125 mm

Material: CALCYT® plaster

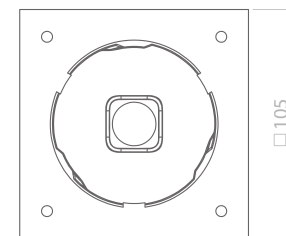

REF N° 200 BLACK

Black
Nero
Schwarz
Zwart
Noir
Negro




REF N° 200 WHITE

White
Bianco
Weiß
Wit
Blanc
Blanco

200CENT SQUARE R FIX IP20 500LM CRI 92

2200°K	2700°K	3000°K	4000°K
REF N° 524 28 530	REF N° 524 28 930	REF N° 524 28 830	REF N° 524 28 730

5,9 W - 500lm - 2 Step MacAdam - **A+**
Serial wiring - □ - **CE** - ▽ - **IP20**
Requires remote LED driver - 700mA
Perfect beam 24° - Ultra low glare (UGR < 13)

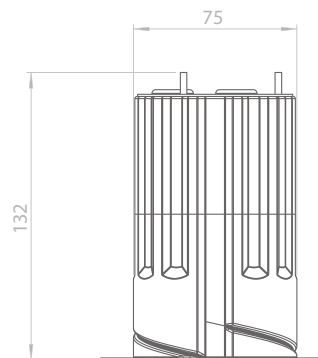

REMOTE LED DRIVER ON/OFF

REF N° 697 00 015 min.2W max. 32W

REF N° 697 00 025 min.2W max. 50W

230V/50Hz - □ - current controlled
▽ - **CE** - IP20 - 700mA - not dimmable

REMOTE LED DRIVER DIM

REF N° 697 60 040 min. 3W max. 60W
1-10V DALI PUSH


REF N° 697 77 010 min. 2W max. 10W PHASE DIM

REF N° 697 77 020 min. 11W max. 20W PHASE DIM

REF N° 697 30 015 min. 2W max. 20W DALI

REF N° 697 60 015 min. 2W max. 20W 1-10V PUSH

230V/50Hz - □ - current controlled
▽ - **CE** - IP20 - 700mA - dimmable

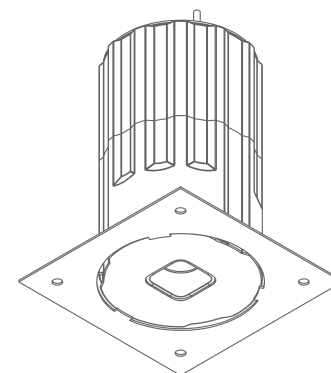

INSTALLATION KIT

STANDARD (included) installation system for concrete ceiling
height adjustable

BEAM ANGLES

STANDARD (included) beam angle 24°



TECHNICAL DATA SHEET


200CENT SQUARE 750LM R FIX TRIMLESS IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

⊞ ∅76 - h = 125 mm

Material: CALCYT® plaster

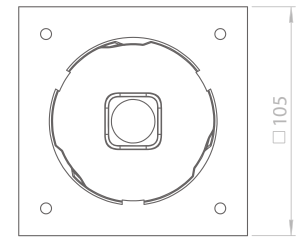

REF N° 200 BLACK

Black
Nero
Schwarz
Zwart
Noir
Negro




REF N° 200 WHITE

White
Bianco
Weiß
Wit
Blanc
Blanco

200CENT SQUARE R FIX IP20 750LM CRI 92

2400°K	2700°K	3000°K	4000°K
REF N° 524 29 530	REF N° 524 29 930	REF N° 524 29 830	REF N° 524 29 730

6,2 W - 750lm - 2 Step MacAdam - **A+**
Serial wiring - ⊞ - **CE** - **V** - **⊞**
Requires remote LED driver - 250 mA
Standard beam angle 36°

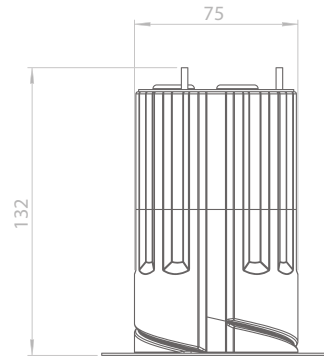

REMOTE LED DRIVER ON/OFF

REF N° 697 00 040 min. 1W max. 30W

REF N° 697 00 080 min. 27W max. 67W

230V/50Hz - ⊞ - current controlled
V - **CE** - IP20 - 250mA - not dimmable


REMOTE LED DRIVER DIM

REF N° 697 60 040 min. 3W max. 30W
1-10V DALI PUSH

REF N° 697 60 150 min. 20W max. 100W 1-10V

REF N° 697 30 150 min. 20W max. 100W DALI

230V/50Hz - ⊞ - current controlled
V - **CE** - IP20 - 250mA - dimmable

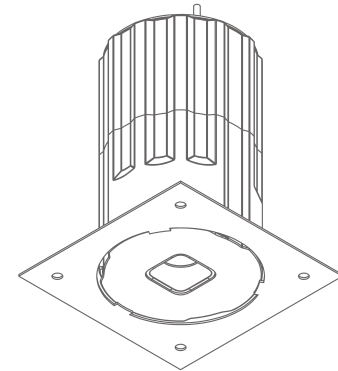

INSTALLATION KIT

STANDARD (included) installation system for concrete ceiling
height adjustable

BEAM ANGLES

STANDARD (included) beam angle 36°

