


Foundry 40 UK/EU
E27: PF069130-XX
LED: PF079130-XX



Foundry 50 UK/EU
E27: PF069140-XX
LED: PF079140-XX

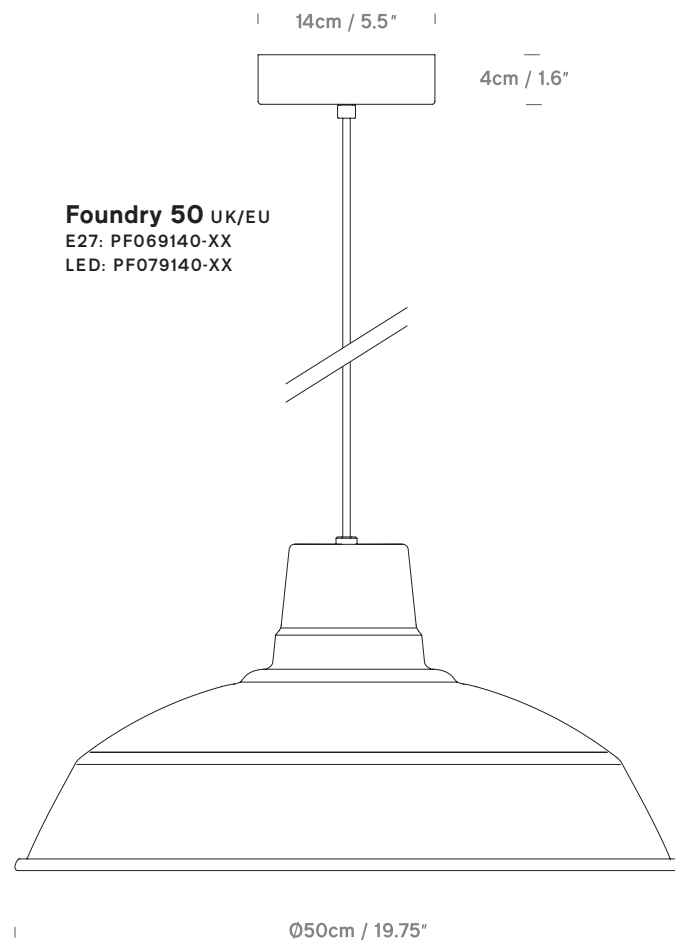

Colour + EAN/UPC Code

	01 -White (RAL 9003 Semi-gloss) EAN: 40 E27:5060481944137 40 LED: 5060481944144 50 E27: 5060481944199 50 LED: 5060481944205
	02 -Black (RAL 9005 Semi-gloss) EAN:40 E27: 5060481944151 40 LED: 5060481944168 50 E27: 5060481944212 50 LED: 5060481944229
	08 -Red (RAL 3020 Semi-gloss) EAN:40 E27: 5060481944175 40 LED: 5060481944236 50 E27: 5060481944236 50 LED: 5060481944243
	27 -Yellow (RAL 1018 Semi-gloss) EAN:40 E27: 5060481940672 40 LED: 5060481940689 50 E27: 5060481940696 50 LED: 5060481940702



Category	Pendant / Ceiling Mount
Material	Aluminium
Cable	1.2m. Matt White PVC
Lightsource	ES E27 / Max 15W LED or Integrated AC LED Module
Switched	No
Class	Class II - Double Insulated
F Mark	Suitable for Mounting on Flammable Materials

IP Rating	IP20
Bathroom Zone	Zone 3
Weight	40: 1.3KGS / 50: 1.5KGS
Individual Carton Size	40: 45x45x25cm / 50: 55x55x28cm
Individual Carton Weight	40: 2.2KGS / 50: XX KGS
Shipping Carton Quantity	40: 04 Units / 50: 01 Units
Shipping Carton Size	40: 104.5x46x47cm / 50: N/A
Shipping Carton Weight	40: 9.5KGS / 50: N/A

LED Chip	Epistar
Wattage	12W
Luminous Flux	900lm
Colour Temp	3000K
CRI	90CRI
Lifetime	40,000Hrs
LDT / IES Files	Available on www.innermost.net
Dimmable	(E27) Lamp Dependant or (LED) Phase Dimming

Recommended Bulb	Pearl LED globe dimmable bulbs 1000 lumen output and colour temperature 2700K. (not incl.) LED Version Energy Efficiency Class: F LED Energy Consumption: 12 kWh/1000h The LED version uses a 230v Driverless AC LED from Paragon.
Smart Compatibility	This product is compatible with most Bluetooth/ Wifi E27 bulbs or systems. Please contact us about the Tuya + Cassambi options we can offer.