

# PHOTOMETRIC TEST REPORT

---

TRIMLESS PRO ROUND  
ADJUSTABLE - MATT WHITE -  
4002531

astro

TRIMLESS PRO ROUND ADJUSTABLE -

astro


LIGHT EFFICIENCY:




LIGHT QUALITY:



COLOR TEMPERATURE:



OUTPUT: 1278 lm  
PEAK: 2271 cd  
POWER: 11.8 W  
PF: 0.95

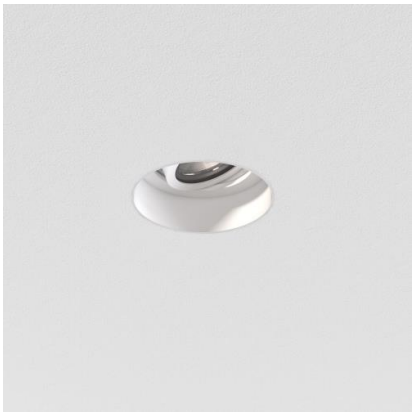


Tracking number: [n/a](#)

Product name:  
Trimless Pro Round Adjustable - Matt  
White - 4002531

Item number:  
TRA-MW-HE30G1-50G1-X-D1


Date and time:  
23/01/2025 11:49:31

Description:  
IP20 LED Downlight

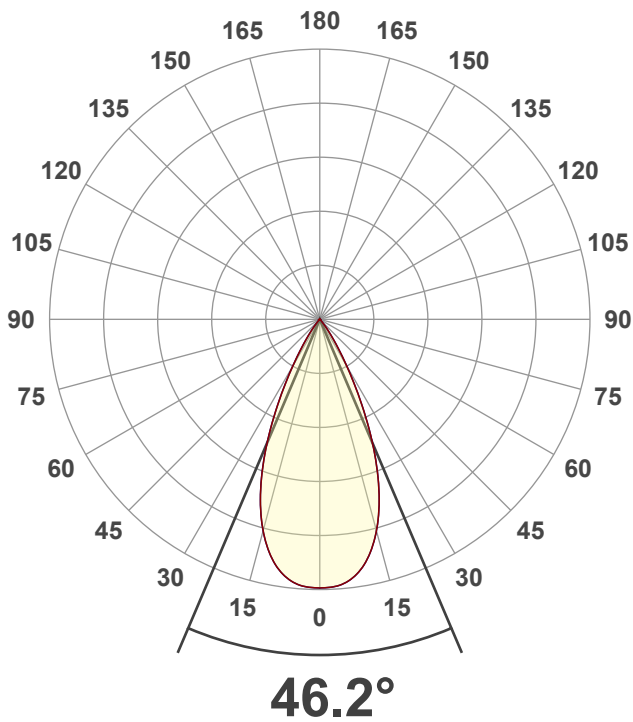


CIE 1931  
x: 0.438  
y: 0.408



SPECTRA

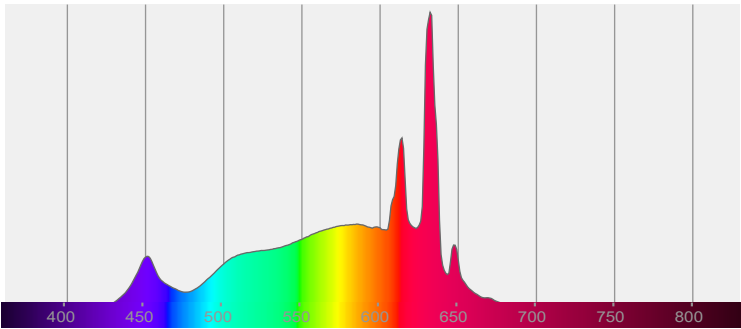


POWER

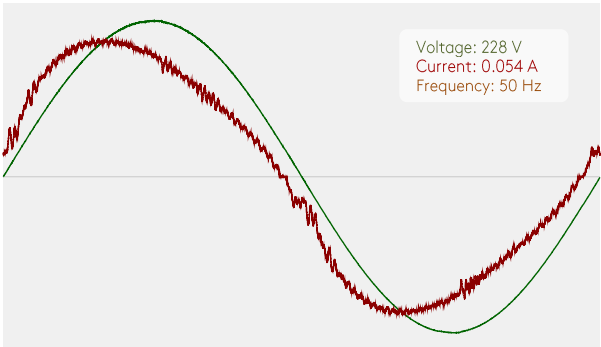


## COLOR DETAILS

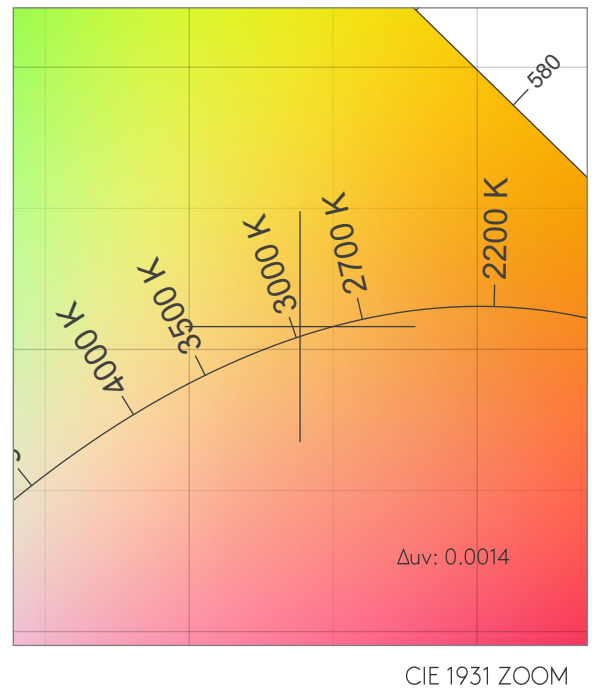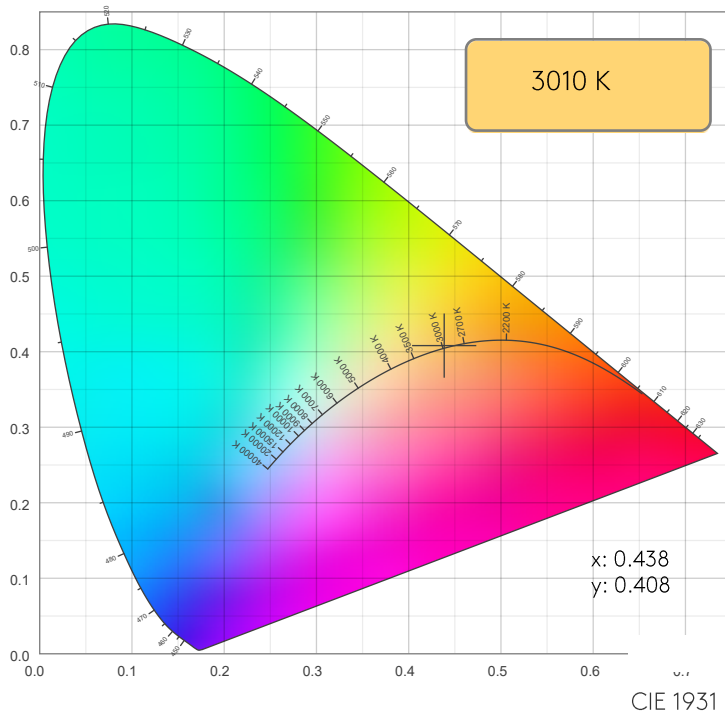

TM30: 93.1

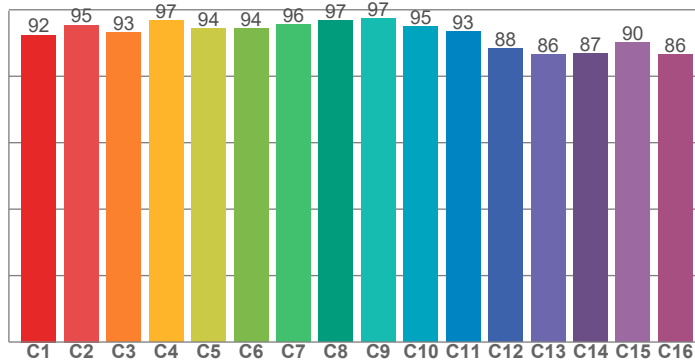

CRI: 95.7 (R1-R8)

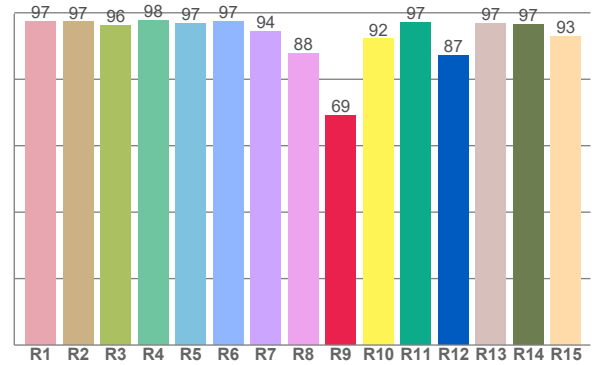

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97.4	97.3	96.2	97.8	96.9	97.5	94.5	87.9	69.1	92.1	97.0	87.2	96.9	96.5	93.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92.4	95.4	93.1	96.7	94.5	94.5	95.7	96.8	97.3	95.0	93.4	88.3	86.5	86.8	90.0	86.5

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
88.1	93.2	92.3	94.3	95.4	93.8	94.6	96.6	98.0	96.2	95.7	96.1	96.5	90.7	89.0

CQS: 93.2

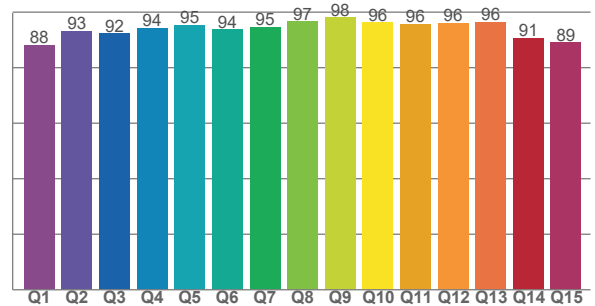

## COLOR PARAMETERS

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
3010 K	95.7	69.1	93.1	100.2	93.2	0.438	0.408	0.250	0.349	0.0014







Rf 93.1

Fidelity index Rf


Rg 100.2

Gammut index Rg

Hue Bin	Rf	Graphic shifts (%)	
		Chroma	Hue
1	92	-4%	-1%
2	95	-2%	1%
3	93	-1%	3%
4	97	0%	2%
5	94	-1%	3%
6	94	3%	2%
7	96	0%	-1%
8	97	2%	0%
9	97	0%	0%
10	95	0%	2%
11	93	1%	4%
12	88	5%	-3%
13	86	3%	-10%
14	87	3%	-10%
15	90	-1%	-6%
16	86	-3%	-10%

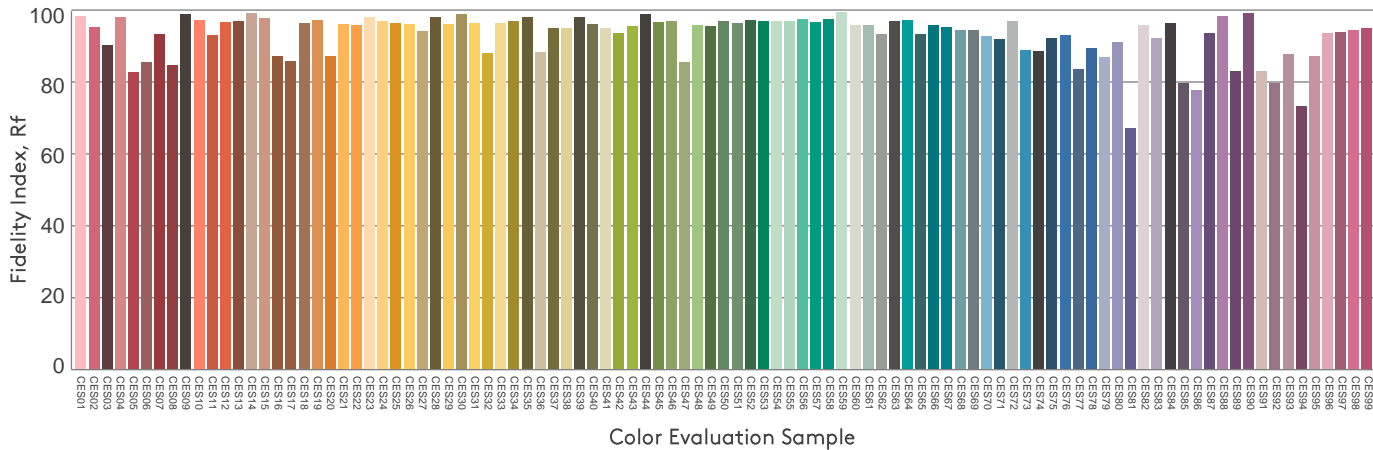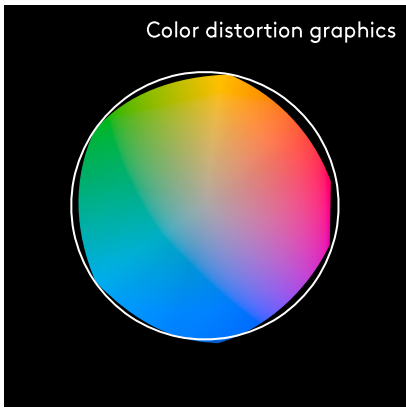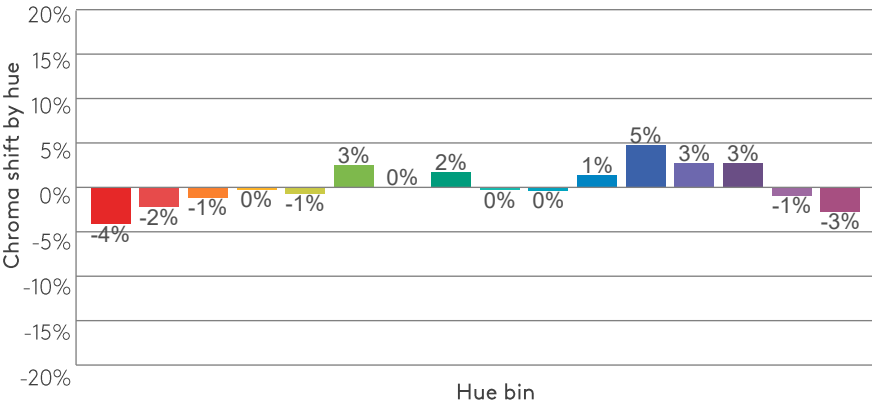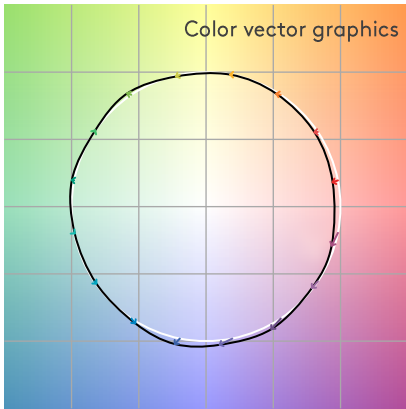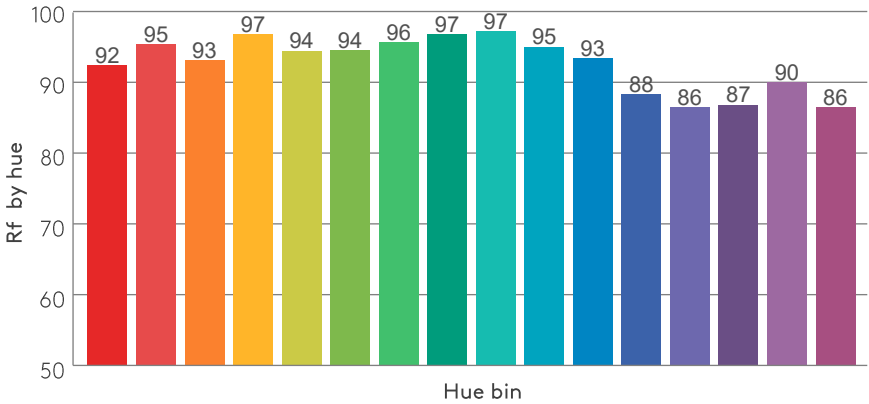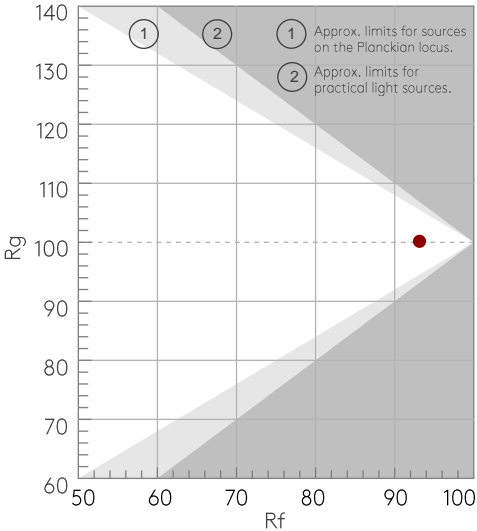

## BEAM DETAILS

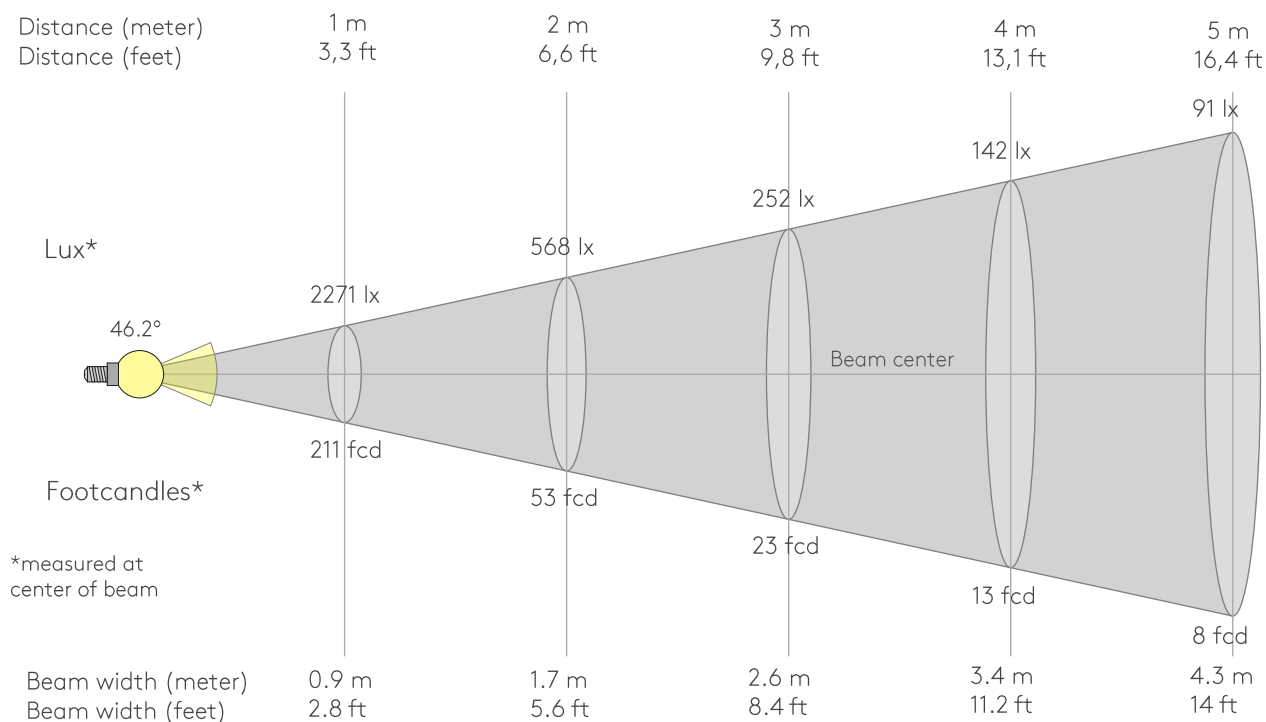

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2271lx	568lx	252lx	142lx	91lx	63lx	46lx	35lx	28lx	23lx	19lx	16lx	13lx	12lx	10lx	9lx	8lx	7lx	6lx	6lx
211fcd	52.8fcd	23.4fcd	13.2fcd	8.4fcd	5.9fcd	4.3fcd	3.3fcd	2.6fcd	2.1fcd	1.7fcd	1.5fcd	1.2fcd	1.1fcd	0.9fcd	0.8fcd	0.7fcd	0.7fcd	0.6fcd	0.5fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2271	2268	2257	2230	2184	2117	2027	1915	1781	1624	1445	1248	1039	827	629	458	319	213	136	80
100%	100%	99%	98%	96%	93%	89%	84%	78%	71%	64%	55%	46%	36%	28%	20%	14%	9%	6%	4%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2271	2268	2257	2230	2184	2117	2027	1915	1781	1624	1445	1248	1039	827	629	458	319	213	136	80
100%	100%	99%	98%	96%	93%	89%	84%	78%	71%	64%	55%	46%	36%	28%	20%	14%	9%	6%	4%

Intensities in 180° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2271	2268	2257	2230	2184	2117	2027	1915	1781	1624	1445	1248	1039	827	629	458	319	213	136	80
100%	100%	99%	98%	96%	93%	89%	84%	78%	71%	64%	55%	46%	36%	28%	20%	14%	9%	6%	4%

Intensities in 270° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2271	2268	2257	2230	2184	2117	2027	1915	1781	1624	1445	1248	1039	827	629	458	319	213	136	80
100%	100%	99%	98%	96%	93%	89%	84%	78%	71%	64%	55%	46%	36%	28%	20%	14%	9%	6%	4%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
46.2°	67.5°	78.5°	99.7%	99.1%

ISO CANDELA DIAGRAM

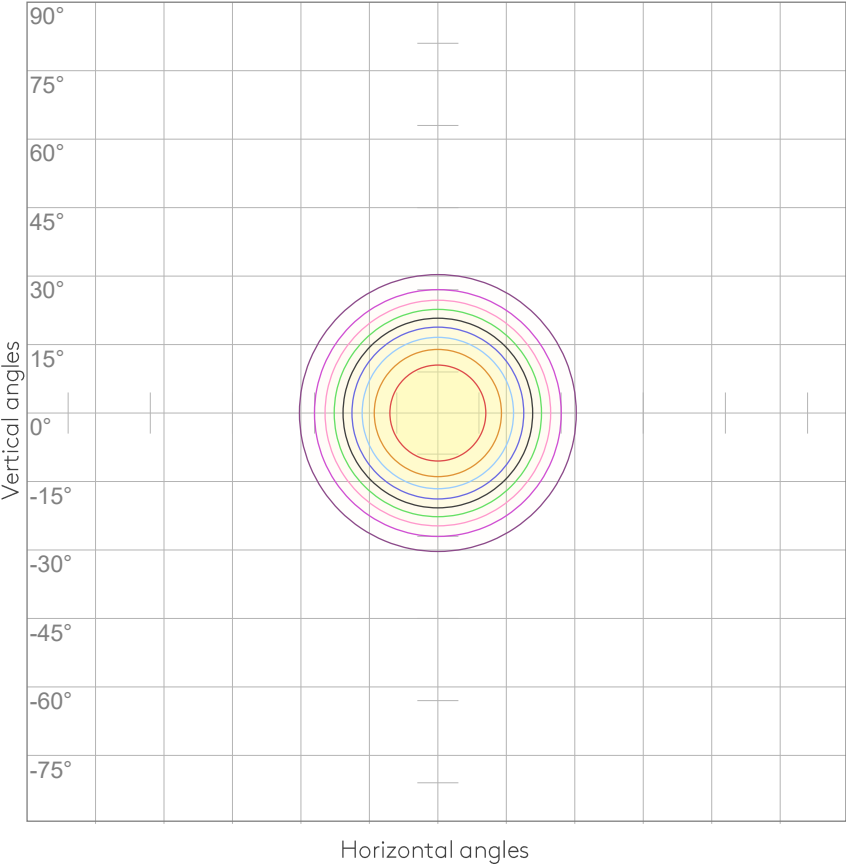

ISO LUX DIAGRAM

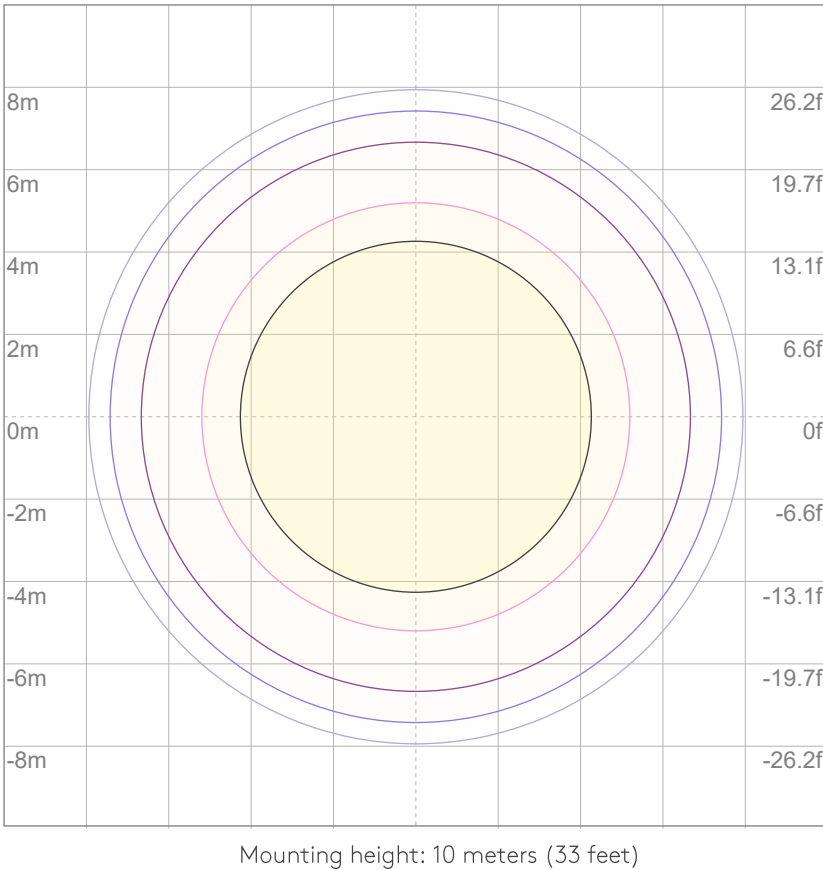

## UGR

## GLARE EVALUATION ACCORDING TO UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X      Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	18.7	19.2	18.8	19.4	19.6	18.7	19.2	18.8	19.4	19.6
	3H	18.4	19.0	18.7	19.2	19.4	18.4	19.0	18.7	19.2	19.4
	4H	18.3	18.9	18.7	19.2	19.4	18.3	18.9	18.7	19.2	19.4
	6H	18.3	18.8	18.6	19.1	19.5	18.3	18.8	18.6	19.1	19.5
	8H	18.3	18.8	18.6	19.1	19.5	18.3	18.8	18.6	19.1	19.5
	12H	18.2	18.7	18.5	19.0	19.5	18.2	18.7	18.5	19.0	19.5
4H	2H	18.3	18.9	18.7	19.2	19.4	18.3	18.9	18.7	19.2	19.4
	3H	18.2	18.7	18.5	19.0	19.5	18.2	18.7	18.5	19.0	19.5
	4H	18.1	18.5	18.5	18.9	19.5	18.1	18.5	18.5	18.9	19.5
	6H	18.0	18.5	18.5	18.8	19.2	18.0	18.5	18.5	18.8	19.2
	8H	17.9	18.4	18.4	18.7	19.1	17.9	18.4	18.4	18.7	19.1
	12H	17.9	18.2	18.4	18.6	19.1	17.9	18.2	18.4	18.6	19.1
8H	4H	17.9	18.4	18.4	18.7	19.1	17.9	18.4	18.4	18.7	19.1
	6H	17.9	18.2	18.4	18.6	19.1	17.9	18.2	18.4	18.6	19.1
	8H	17.9	18.1	18.4	18.6	19.2	17.9	18.1	18.4	18.6	19.2
	12H	17.8	18.0	18.4	18.5	19.1	17.8	18.0	18.4	18.5	19.1
12H	4H	17.9	18.2	18.4	18.6	19.1	17.9	18.2	18.4	18.6	19.1
	6H	17.9	18.1	18.4	18.6	19.2	17.9	18.1	18.4	18.6	19.2
	8H	17.8	18.0	18.4	18.5	19.1	17.8	18.0	18.4	18.5	19.1
Variation of the observer position for the luminaire distance S											
S = 1.0H		6.3 / -12.6					6.3 / -12.6				
S = 1.5H		9.1 / -14.3					9.1 / -14.3				
S = 2.0H		11.1 / -15.2					11.1 / -15.2				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1278 lm total luminous flux											

# TRIMLESS PRO ROUND ADJUSTABLE - LIGHT PLANNING


astro

## COEFFICIENTS OF UTILIZATION

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	97	97	95
2	110	105	102	99	107	104	100	98	100	98	96	97	95	94	95	93	92	90
3	105	99	95	92	103	98	94	91	96	92	90	93	90	88	91	89	87	85
4	101	94	90	86	99	93	89	85	91	87	84	89	86	83	87	85	82	81
5	97	90	85	81	95	89	84	80	87	83	80	85	82	79	84	81	78	77
6	93	85	80	76	91	84	80	76	83	79	76	82	78	75	80	77	75	73
7	89	81	76	72	88	81	76	72	79	75	72	78	74	71	77	74	71	70
8	86	77	72	69	85	77	72	69	76	72	68	75	71	68	74	71	68	67
9	82	74	69	66	81	74	69	65	73	68	65	72	68	65	71	68	65	64
10	79	71	66	63	78	71	66	63	70	65	62	69	65	62	68	65	62	61

LAMPS (number of lamps)

## LUMINAIRE BUDGETARY DIAGRAM

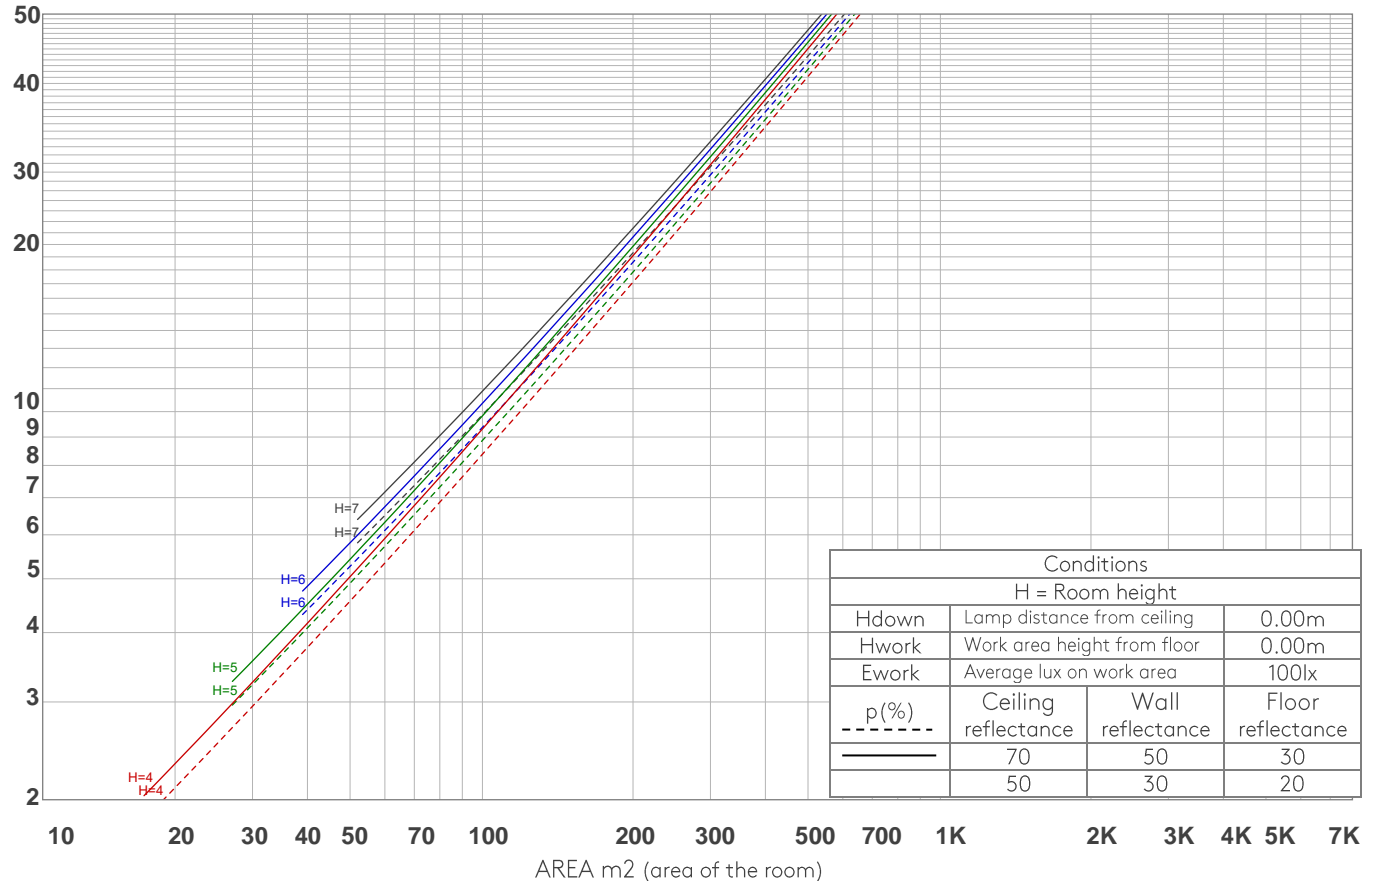

## ZONAL LUMEN SUMMARY


0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
210 lm	507 lm	420 lm	119 lm	12.9 lm	3.90 lm	1.25 lm	0.584 lm	0.214 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.056 lm	0.057 lm	0.069 lm	0.124 lm	0.269 lm	0.482 lm	0.543 lm	0.364 lm	0.107 lm

FLICKER


FLICKER CURVE (COMPLETE SAMPLED)



FLICKER FRAME (FRAME OF ONE FLICKER)

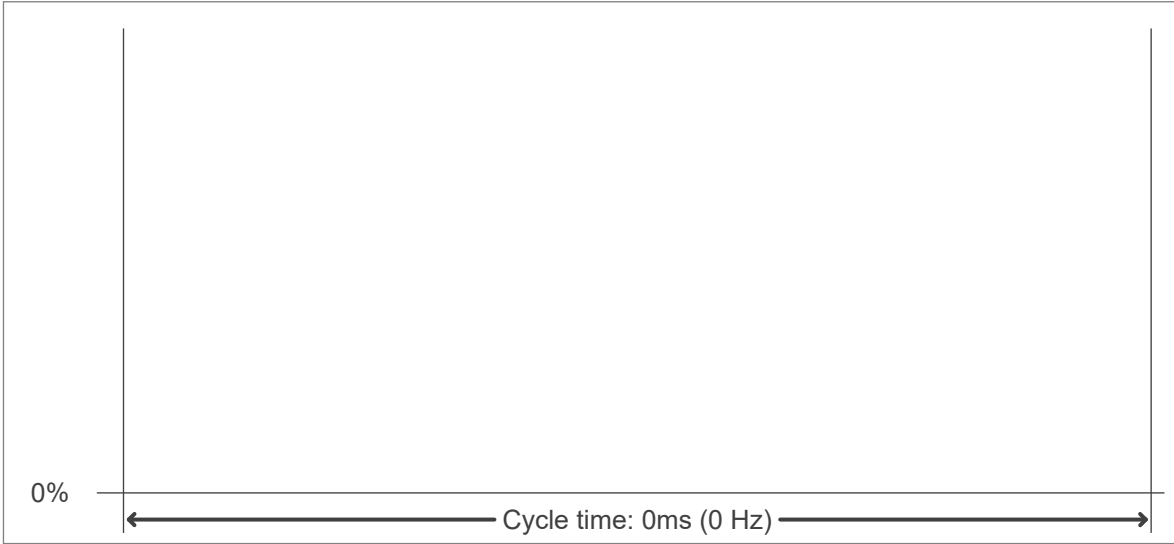

FLICKER FFT (FREQUENCY SCOPE OF FLICKER)

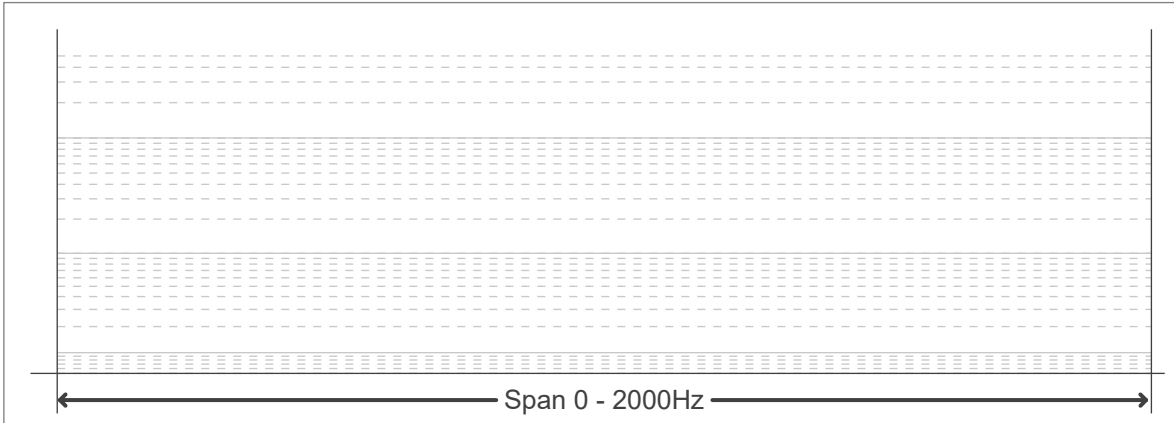

FLICKER RESULTS:

Flicker frequency:	n/a Hz
Flicker index:	n/a
Flicker percentage:	n/a %
SVM: (Visual flicker)	n/a

FLICKER CONDITIONS:

Sample rate:	n/a samples/second
--------------	--------------------