
THREE-CIRCUIT TRACK LINEAR LIGHT

Via Evo Track 850

FARO
Three-circuit track system



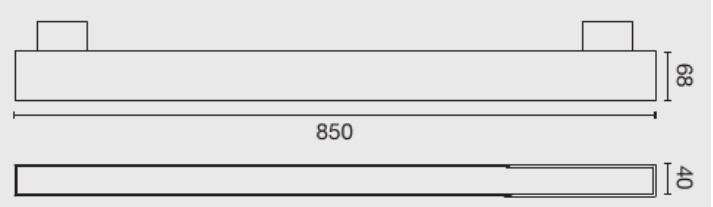

Dimensions in mm

A 850 mm linear light that clips onto the three-circuit track for even, general lighting in kitchens, shops, offices and corridors, alongside spotlights on the same track. Two track adapters hold it level along the track. Opal or microprism diffuser.

SPECIFICATIONS

Mounting	Faro three-circuit (3-phase) track
Voltage	220–240 V, 50/60 Hz
Power	20 W or 38 W; tunable white 39 W
Light source	LED, driver included
CRI	80
Colour temperature	3000 K or 4000 K; tunable white 2700–6500 K (DALI only)
Colour consistency	MacAdam 3 step
Diffuser	Opal (110°) or microprism (90°)
Rated life	50,000 h (L80/B10)
Protection	IP20, for indoor use
Finish	Matt white or matt black
Control	On/Off or DALI (tunable white is DALI only)
Size	850 mm long, 40 mm wide, 69 mm high

LIGHT OUTPUT

	Opal	Microprism
20 W 3000 K	2,131 lm	1,735 lm
38 W 3000 K	3,809 lm	3,121 lm
20 W 4000 K	2,195 lm	1,787 lm
38 W 4000 K	3,923 lm	3,214 lm
39 W tunable white	2,985 lm	2,429 lm

Luminous flux from Faro's catalogue.

CONTROL

On/Off	Switched, not dimmable
DALI	Needs Faro DALI track and connectors

Each light's adapter selects one of the track's three circuits.

ORDERING CODES

Via Evo Track 850

FARO
36 variants

Every variant, grouped by control and finish. Codes are our stock codes (Faro reference with an FA prefix).

Code	Output	Diffuser	Light
On/Off · Matt Black			
FA0410T5402	38W 3000K	Opal	3,809 lm
FA0410T5402U	38W 3000K	Microprism	3,121 lm
FA0410T6302	38W 4000K	Opal	3,923 lm
FA0410T6302U	38W 4000K	Microprism	3,214 lm
FA0410T5602	20W 3000K	Opal	2,131 lm
FA0410T5602U	20W 3000K	Microprism	1,735 lm
FA0410T6502	20W 4000K	Opal	2,195 lm
FA0410T6502U	20W 4000K	Microprism	1,787 lm
On/Off · Matt White			
FA0410T5401	38W 3000K	Opal	3,809 lm
FA0410T5401U	38W 3000K	Microprism	3,121 lm
FA0410T6301	38W 4000K	Opal	3,923 lm
FA0410T6301U	38W 4000K	Microprism	3,214 lm
FA0410T5601	20W 3000K	Opal	2,131 lm
FA0410T5601U	20W 3000K	Microprism	1,735 lm
FA0410T6501	20W 4000K	Opal	2,195 lm
FA0410T6501U	20W 4000K	Microprism	1,787 lm
DALI · Matt Black			
FA0410T5402D	38W 3000K	Opal	3,809 lm
FA0410T5402DU	38W 3000K	Microprism	3,121 lm
FA0410T6302D	38W 4000K	Opal	3,923 lm
FA0410T6302DU	38W 4000K	Microprism	3,214 lm
FA0410T5602D	20W 3000K	Opal	2,131 lm
FA0410T5602DU	20W 3000K	Microprism	1,735 lm
FA0410T6502D	20W 4000K	Opal	2,195 lm
FA0410T6502DU	20W 4000K	Microprism	1,787 lm
FA0410T0302	39W Tunable White	Opal	2,985 lm
FA0410T0302U	39W Tunable White	Microprism	2,429 lm
DALI · Matt White			
FA0410T5401D	38W 3000K	Opal	3,809 lm
FA0410T5401DU	38W 3000K	Microprism	3,121 lm
FA0410T6301D	38W 4000K	Opal	3,923 lm
FA0410T6301DU	38W 4000K	Microprism	3,214 lm
FA0410T5601D	20W 3000K	Opal	2,131 lm
FA0410T5601DU	20W 3000K	Microprism	1,735 lm
FA0410T6501D	20W 4000K	Opal	2,195 lm
FA0410T6501DU	20W 4000K	Microprism	1,787 lm
FA0410T0301	39W Tunable White	Opal	2,985 lm
FA0410T0301U	39W Tunable White	Microprism	2,429 lm